

BUS

Wired electro-installation







ELKO EP

**We have been your partner in the field for 30 years,
manufacturing and developing the highest quality
electrical devices.**

ELKO EP employs 330 people across 15 foreign branches that exports its products to more than seventy countries. Company of the Year of the Zlín Region, Visionary of the Year and Global Exporter of the Year are just some of the awards we have received throughout the years as we consistently strive to move forward in the field of innovation and development.

Millions of relays, hundreds of smart homes and thousands of satisfied customers. This is ELKO EP; a traditional company based in the center of Europe, where development, production, logistics, and service are at the forefront of our focus. Building automation systems, smart city facilities and the Internet of Things (IoT) devices are solutions we can offer.

Facts and stats



35 %
Czech

40 %
Export

25 %
Branches

330
Employees

15 000
iNELS
installation

12 000 000
Manufactured
products



10
Branches

6
Franchises

70
Exporting
countries



World leader
in production of relays



WE ARE



DEVELOPERS

In the new R&D centre, more than 30 engineers develop new products and extend the functionality of existing product.



PRODUCERS

Modern antistatic spaces, 2 × fully automated SMD production lines with 2 shift operations.



SUPPORT

24 hours / 7 days / 360 days we not only provide technical support but also logistics.



SELLERS

Personal access to more than 70 sales representatives in ELKO EP Holding providing impeccable services and superior products at an affordable price.

Smart electro-installations

iNELS BUS infrastructure	6
iNELS BUS integration	9
Overview of system units	10

Central units

IP-MASTER Superior central unit - NEW!	14
CU3-07M Central unit with 1x BUS, 1x EBM	15
CU3-08M Central unit with 2x BUS	16
CU3-09M/DALI Central unit with 1x BUS, 1x DALI - COMING SOON!	17
CU3-10M Central unit with 1x BUS, 1x MODBUS - COMING SOON!	18

System units

PS3-30/iNELS Power supply with BUS separator	20
BPS3-01M, BPS3-02M Bus separator from power supply	21
PSM3-30/iNELS Power supplies for iNELS BUS	22
PSM3-60/iNELS Power supplies for iNELS BUS	22
PSM3-100/iNELS Power supplies for iNELS BUS	22

Lighting control

EMDC-64M Converter iNELS EBM - DALI/DMX	24
DMD3-1 Combined motion, temperature, humidity and intensity detector	25
DLS3-1 Light intensity sensor	26

Converters

ADC3-60M Analog-to-digital converter, 6 input	27
DAC3-04M Digital-to-analog converter, 4 input	28

Roller shutter actuators

JA3-02B/DC Roller shutter (blind) actuator, 2 channels (1 controller)	29
JA3-018M Roller shutter (blind) actuator, 18 channels (9 controllers)	30

Switching actuators

SA3-01B, SA3-02B Switching actuator, 1 channel and 2 channels	31
SA3-04M Switching actuator, 4 channels	32
SA3-06M Switching actuator, 6 channels	33
SA3-012M Switching actuator, 12 channels	34
SA3-022M Switching actuator, 22 channels	35
EA3-022M Switching actuator without controls and indicators, 22 channels	36

Dimming actuators

DA3-22M Universal dimming actuator, 2 channels	37
DA3-66M Dimming actuator, 6 channels - NEW!	38
DA3-03M/RGBW Dimming actuator for RGBW strips - COMING SOON!	39
LBC3-02M Dimming actuator for ballasts, 2 channels	40

Input units

IM3-40B, IM3-80B Binary input units, 4 channels and 8 channels	42
TI3-40B Temperature input, 4 channels	44
TI3-60M Temperature input, 6 channels	45
IM3-140M Binary input unit, 14 channels	46

Combined units

RC3-610M/DALI | Room controller with DALI dimmer - **NEW!** 47

RC3-612M | Room controller with PHASE dimmers - **COMING SOON!** 48

FA3-612M | Special unit for controlling fan coils 49

IOU3-108M | Universal unit with inputs and outputs, 10 inputs and 8 outputs 50

Wall units and controllers

EST3 | Touchscreen control unit 52

GSB3-40, GSB3-60, GSB3-80 | Glass switches button 54

WSB3-20, WSB3-20H | Wall switch button, 2 buttons 56

WSB3-40, WSB3-40H | Wall switch button, 4 buttons 57

WMR3-21 | Wall card reader 58

GMR3-61 | Glass card reader 59

IDRT3-1 | Digital room thermo-regulator 60

Hotel units

GCR3-11 | Glass card reader 61

GDB3-10 | Glass room door bell (info panel) 62

GCH3-31 | Glass card holder 63

EHT3 | Hotel control unit with touch screen 64

GRT3-50 | Glass room thermo-regulator 65

GBP3-60 | Glass bedside panel 66

GBP3-60 | Accessories 67

GSP3-100 | Glass switch panel 69

GSB3-20/S, GSB3-40/S, GSB3-60/S | Glass switch button with symbols 70

Integration

Integration of iNELS into the Building Management Systems (BMS) 72

iNELS Bridge | Third-party integration gateway - **NEW!** 75

Connection Server II. | Third-party integration server - **NEW!** 76

eLAN-IR-003 | Ethernet-IR converter 77

eLAN-RS485/232 | Converter RS485/232-iNELS 78

Multimédia

LARA Radio 80

LARA Intercom 81

LARA accessories 83

iNELS application: "ALL in ONE" 84

Accessories iNELS

TELVA-2 230V, TELVA-2 24V | Thermodrive 86

TC, TZ, Pt100 | Thermo sensors 87

Bus wiring 88

Product loadability 89

Installation possibilities 92

Product dimensions 94

Open topology with new possibilities


iNELS BUS comes with a progressive system architecture using the IP protocol.

Evolutionary change in the structure of the connection to the collection system and iNELS BUS, it is only possible to use the IP protocol to connect individual central units and the collection points connected to them. The new IP infrastructure brings about the full potential of using collection points in small, medium and very large installations.



MiniCU Family


Unlike the previous version of iNELS BUS, where all buses were connected via EBM to one central unit, in the new structure each bus is fully autonomous thanks to the minified version of the central unit (CU3-07 / 08M / 09M / 10M). MiniCU (short name for single-module central unit) is a full-fledged central unit that controls only 1 or 2 buses with additional bus EBM/Dali/Modbus. The main difference is that full functionality is maintained even if communication with other units is lost, so that all units connected to the miniCU remain interconnected, including all predefined links. After the connection with the superior units is re-established, the centrally controlled functions will only be synchronized and restored.

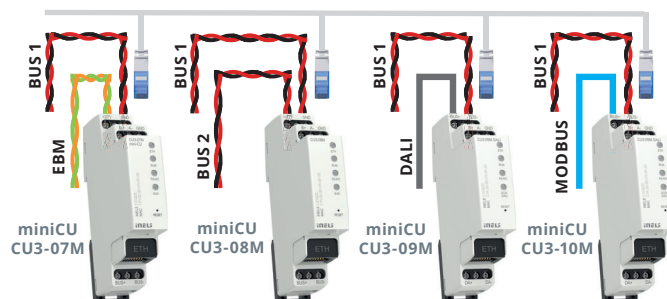

	CU3-07M	CU3-08M	CU3-09M	CU3-10M
BUS1	✓	✓	✓	✓
BUS2		✓		
EBM BUS	✓			
DALI BUS			✓	
MODBUS				✓


One central unit even for large installations

Centrally controlled functionalities are provided by the master central unit IP-MASTER. The „IP master“ clearly defines how this central unit is connected to the autonomous MiniCUs using the IP protocol. With a commonly used Ethernet speed of 100Mbps and the possibility of asynchronous communication, the connection capacity between the IP-MASTER and the slave miniCUs is greater than in the previous version of iNELS BUS. Thanks to this, we can connect the IP-MASTER to a much larger number of slave buses at the same time.

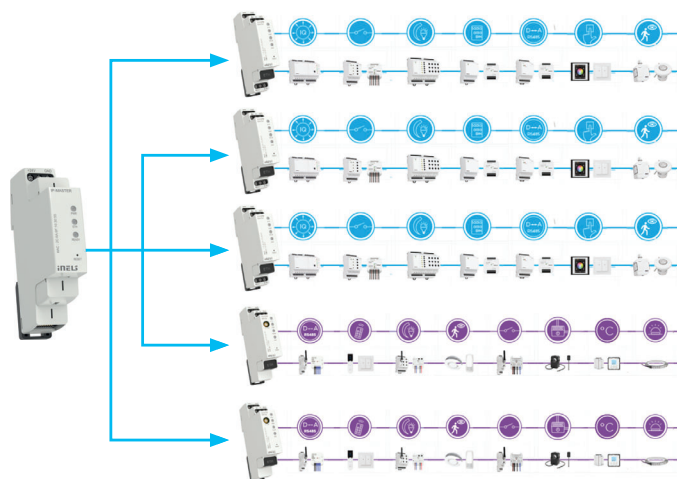


Autonomous installation

Thanks to the high performance of the IP-MASTER unit, we can control even large installations with only one central unit. Unlike similar solutions, where the IP protocol is used in large installations mainly for connection to an external system based on cloud technologies, IP-MASTER guarantees full functionality without the need for an Internet connection. For fully functional operation of a large installation, it is only necessary to ensure mutual connectivity with subordinate MiniCUs.

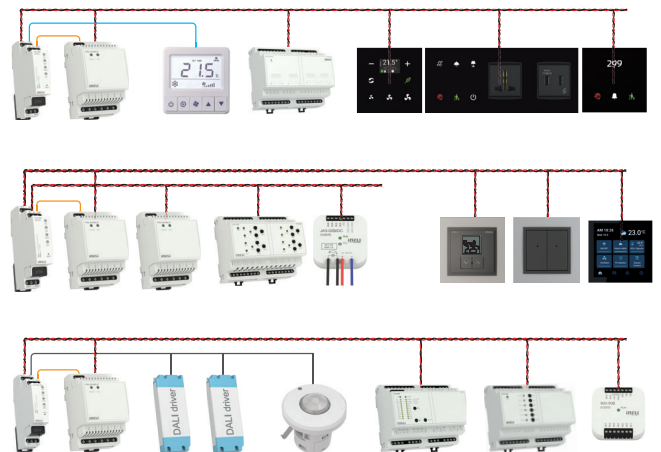


Central supervision & global conditionality

The new IP infrastructure consists not only in the connection between the MiniCU and the IP-MASTER central unit, but also in the connection to the central iNELS CLOUD system. Using the cloud, it is possible to connect, individual Central units, IP-MASTER units with all their subordinate units, buses and elements. This creates not only the possibility of unlimited scaling of the iNELS BUS system, but also the possibility of creating interrelated functions, where the control element on one installation can control the actuators on a geographically remote installation controlled by another Central unit or eLAN gateway. In addition, iNELS CLOUD offers the possibility of creating conditions linked to external third-party systems or within the system.

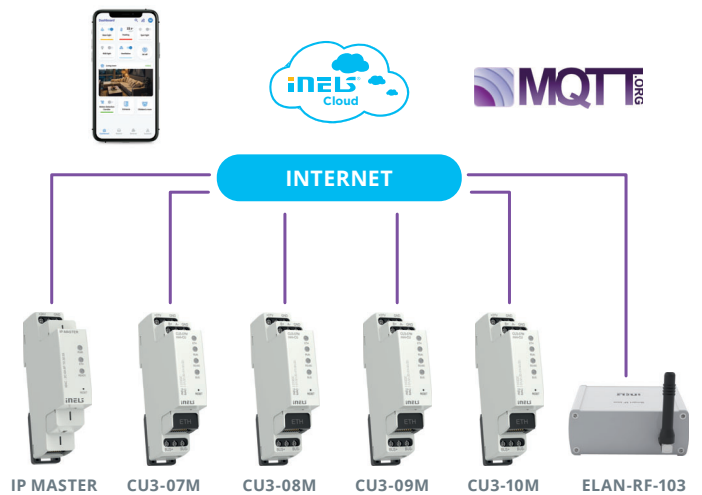

iNELS Bridge


The new IP infrastructure also includes the option of connecting iNELS central units (wired/wireless technology) and newly implemented third-party integration control unit iNELS Bridge. With the help of iNELS Bridge, It is possible to integrate almost the entire iNELS portfolio, including third-party devices that can be connected using the open Home Assistant platform. iNELS Bridge is also pre installed with Connection server and Asterisk for 3rd party integration.

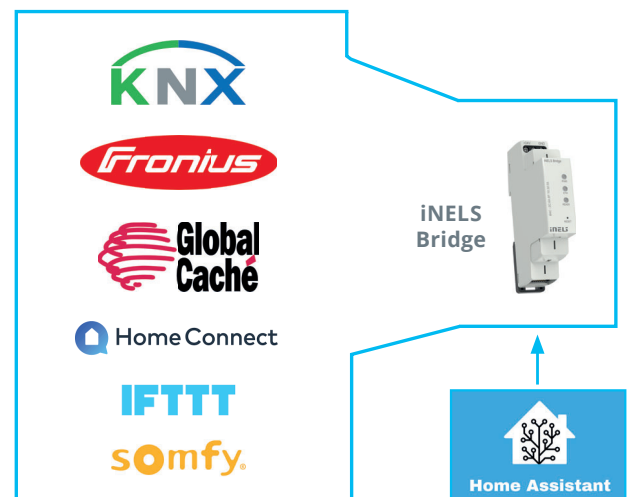


APPS




BUS 1 EBM BUS
CU3-107M

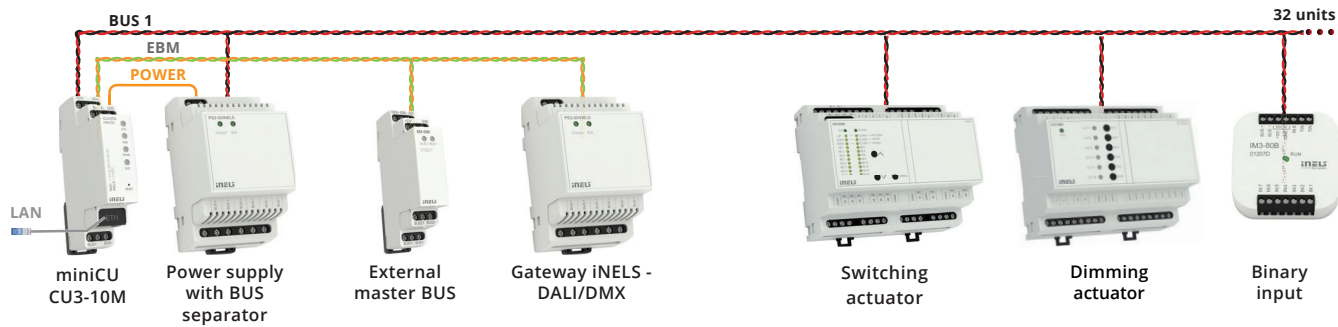


BUS 1 BUS 2
CU3-08M

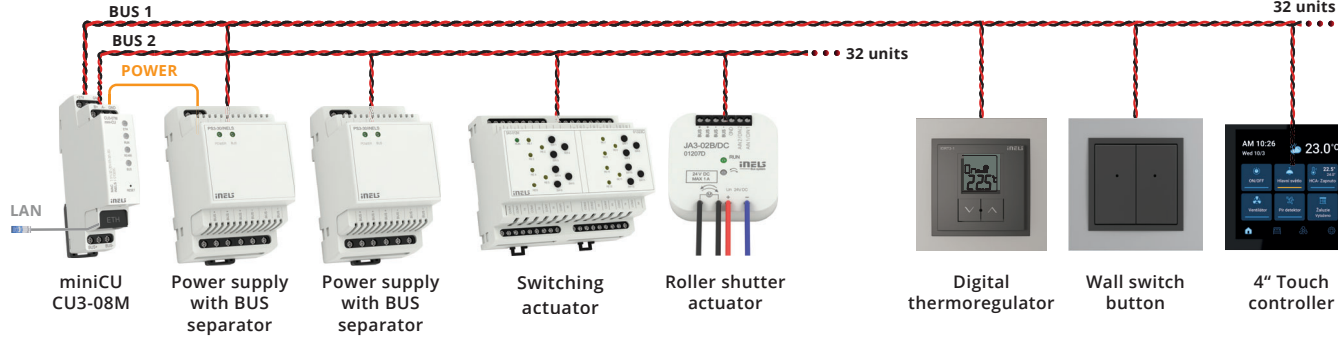

BUS 1 DALI
CU3-09M/DALI


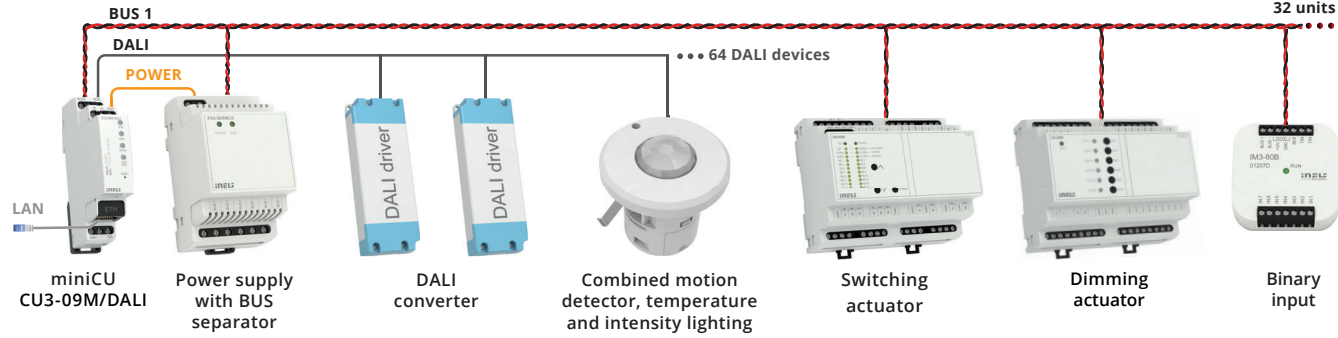


BUS 1 MODBUS
CU3-10M

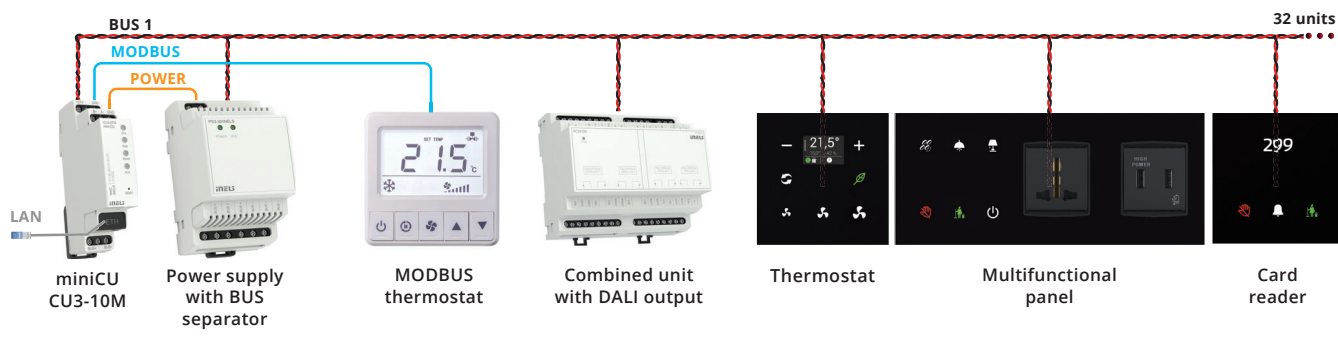

RADIO 868 Mhz
eLAN-RF-104



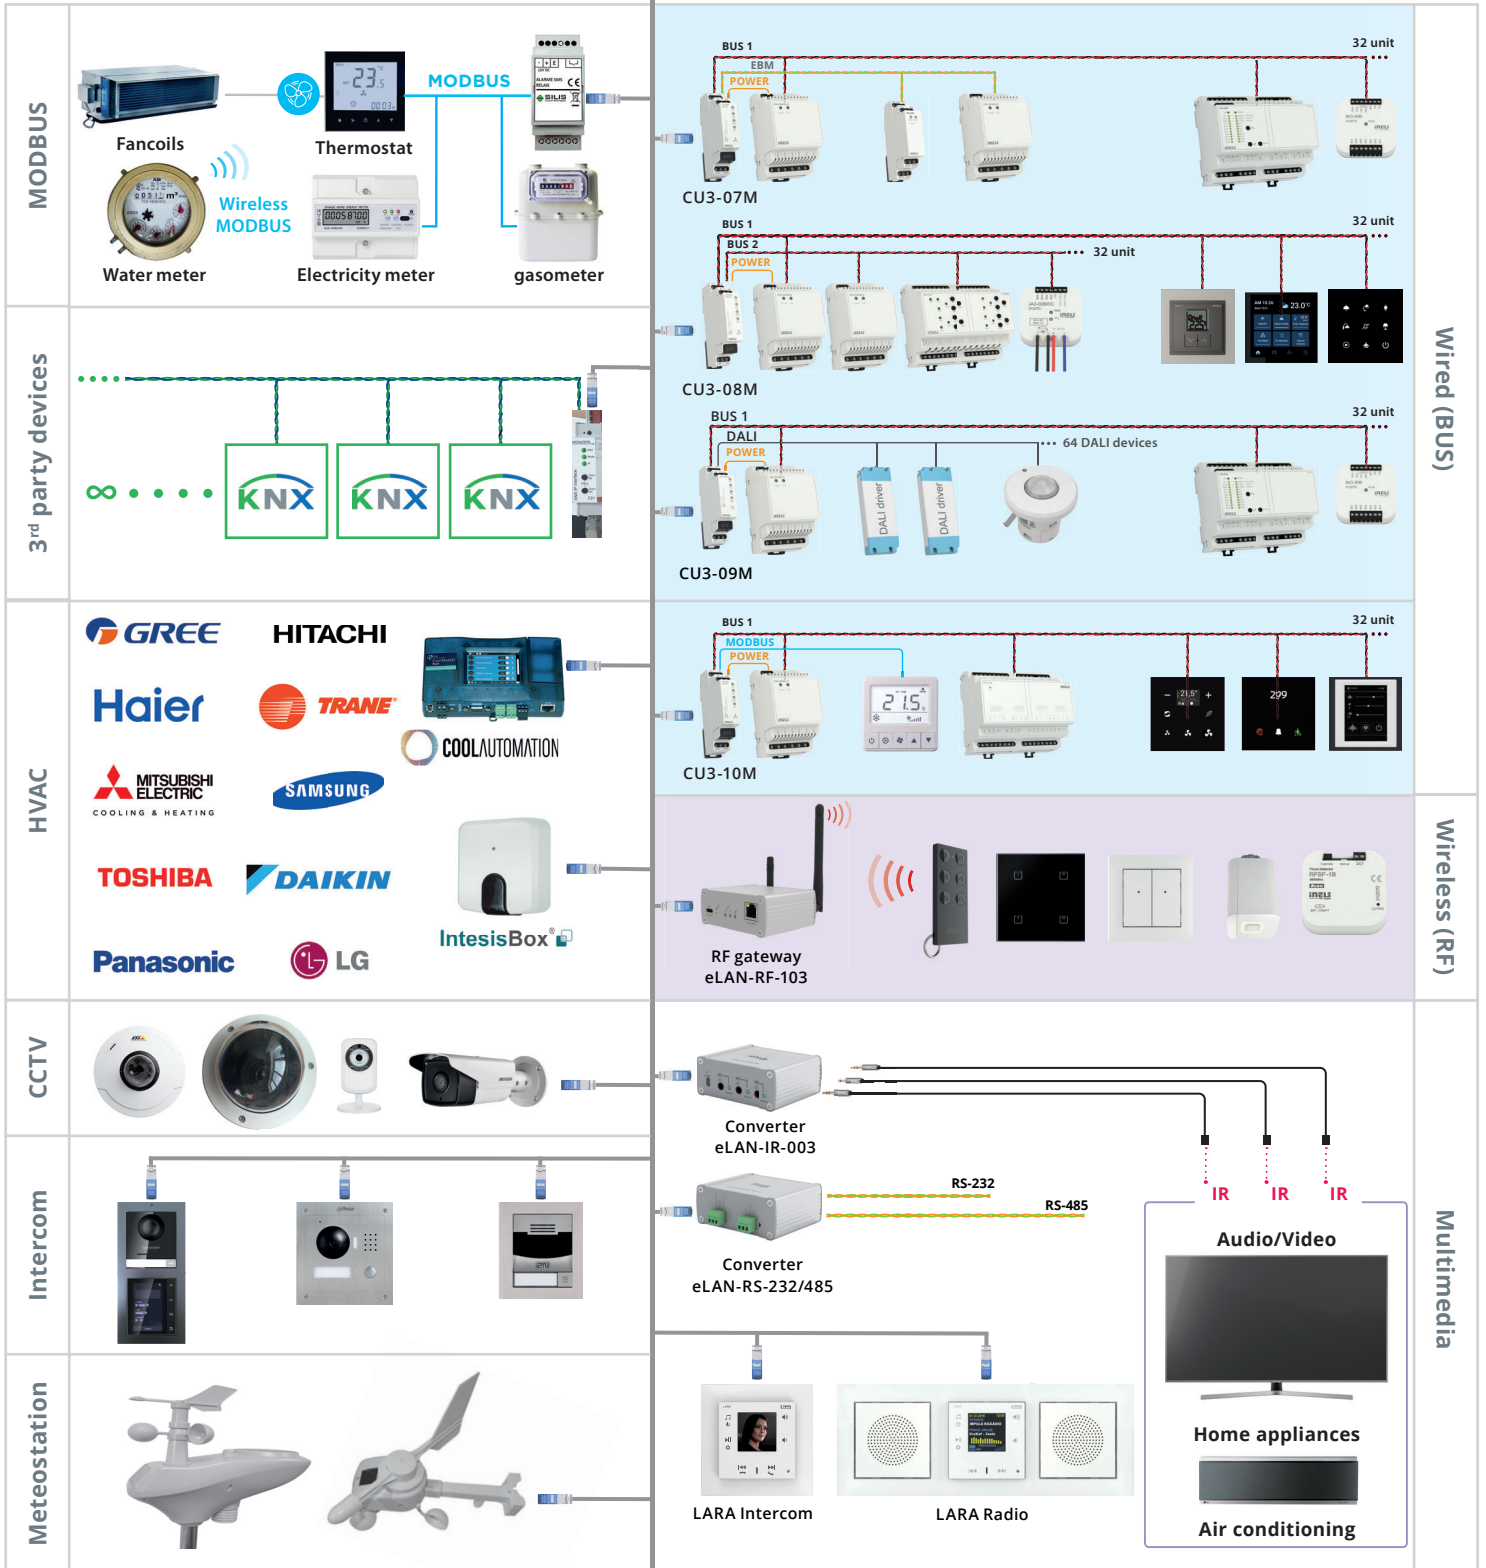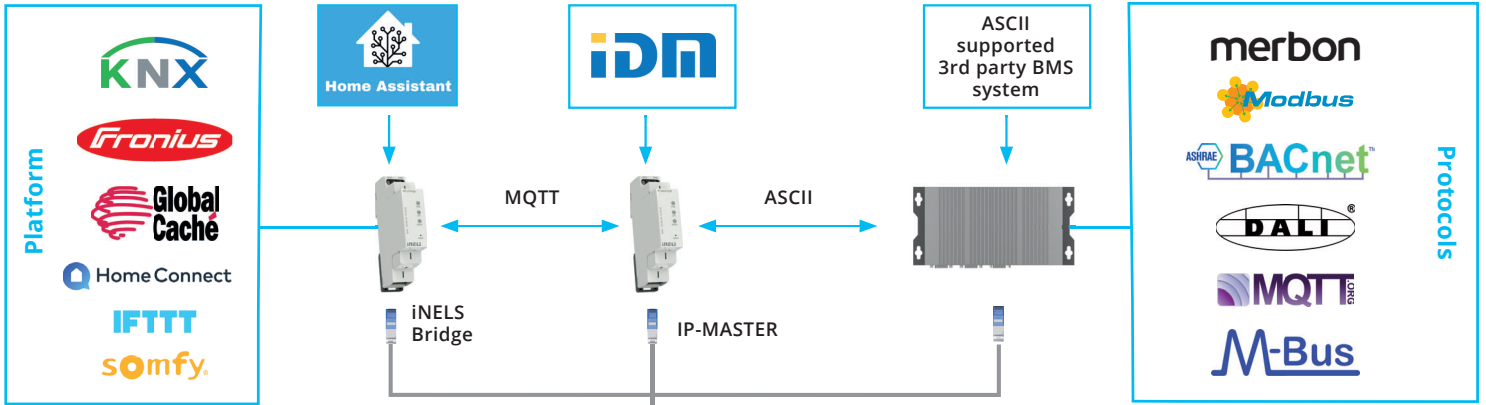

Central units



IP-MASTER
Superior central unit



CU3-07M
Central unit
with 1x BUS, 1x EBM,
max. 32 Elements,
iNELS IP protocol



CU3-08M
Central unit
with 2x BUS,
max. 64 Elements,
iNELS IP protocol



CU3-09M/DALI
Central unit
with 1 BUS, 1x DALI,
max. 32 Elements
iNELS IP protocol



CU3-10M
Central unit
with 1x BUS,
1x MODBUS

System units



PS3-30/iNELS
Power supply
with BUS separator



BPS3-01M, BPS3-02M
Bus separator
from power supply



PSM3-30
Power supply
for iNELS BUS



PSM3-60
Power supply
for iNELS BUS



PSM3-100
Power supply
for iNELS BUS

Lighting control



EMDC-64M
Converter iNELS
EBM - DALI/DMX
max. 64 address



DMD3-1
Combined motion detector,
temperature, humidity
a intensities lighting



DLS3-1
Light intensity
sensor

Converters

Roller shutter actuators



ADC3-60M
Analog-to-digital converter,
6 inputs



DAC3-04M
Digital-to-analog converter,
4 inputs



JA3-02B/DC
Roller shutter (blind)
actuator, 2 channels
(1 controller)



JA3-018M
Roller shutter (blind)
actuator, 18 channels
(9 controllers)

Switching actuators



SA3-01B, SA3-02B
Switching actuator,
1 channel and 2 channels




SA3-04M
Switching actuator,
4 channels



SA3-06M
Switching actuator,
6 channels



SA3-012M
Switching actuator,
12 channels



SA3-022M
Switching actuator,
22 channels


Dimming actuators



EA3-022M
Switching actuator without
controls and indicators,
22 channels



DA3-22M
Universal dimming
actuator,
2 channels



DA3-66M
Dimming actuator,
6 channels



DA3-03M/RGBW
Dimming actuator
for RGBW strips



LBC3-02M
Dimming actuator
for ballasts,
2 channels

Input units




IM3-80B
Binary input unit,
8 channels



T13-40B
Temperature input,
4 channels



IM3-40B
Binary input unit,
4 channels



T13-60M
Temperature input,
6 channels



IM3-140M
Binary input unit,
14 channels

Combined units




RC3-610M/DALI
Room controller
with DALI dimmer



RC3-612M
Room controller
with PHASE dimmers



FA3-612M
Special unit
for controlling fan coils




IOU3-108M
Universal unit with
inputs and outputs,
10 inputs, 8 outputs


Wall units and controllers




EST3
Touchscreen control unit




GSB3-40
Glass switch button




GSB3-60
Glass switch button




GSB3-80
Glass switch button




WSB3-20, WSB3-20H
Wall switch button, 2 buttons



WSB3-40, WSB3-40H
Wall switch button, 4 buttons



WMR3-21
Wall card reader




GMR3-61
Glass card reader




IDRT3-1
Digital room thermo-regulator


Hotel units



GCR3-11
Glass card reader




GDB3-10
Glass room doorbell (info panel)




GCH3-31
Glass card holder




EHT3
Hotel control unit with touch screen




GRT3-50
Glass room thermo-regulator

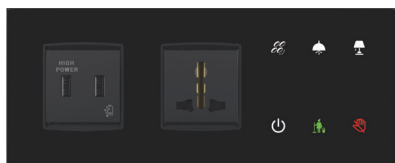


GBP3-60/xL/2F
Glass bedside panel left

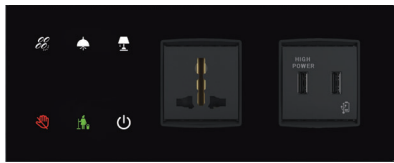


GBP3-60/xR/2F
Glass bedside panel right




GSB3-20/S
Glass switch button with symbols




GSB3-40/S
Glass switch button with symbols



GSB3-60/S
Glass switch button with symbols



GSP3-100
Glass switch panel



GBP3-60/xL/1F
Glass switch panel left




GBP3-60/xR/1F
Glass switch panel right

Multimedia

Integration



LARA Radio
Player Internet radio



LARA Intercom
Multifunction communication equipment



iNELS Bridge
Third-party integration gateway



Connection Server II.
Third-party integration server




eLAN-RS485/232
Converter RS485/232-iNELS



eLAN-IR-003
Converter Ethernet-IR

Mobile app iNELS

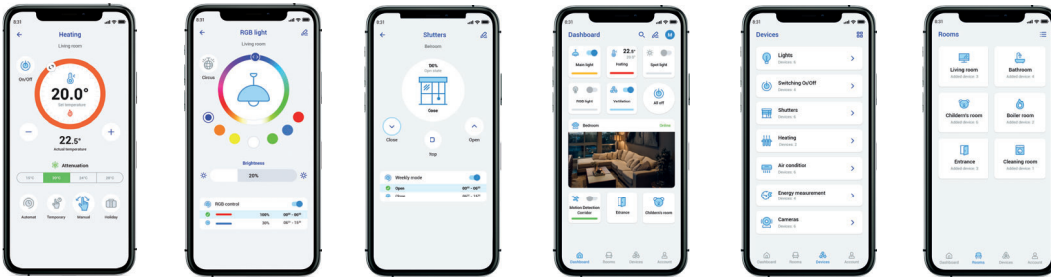

New mobile application for controlling all compatible elements from the iNELS portfolio.

Accessories



**TELVA-2 230V,
TELVA-2 24V**
Thermdrive



AN-I, AN-E
Internal antenna
External antenna



TC, TZ, Pt100
Thermo sensors




EAN code
 IP-MASTER 24V DC: 8595188185097
 IP-MASTER 230V AC: 8595188185240


Technical parameters		IP-MASTER
Communication		
Communication network:	Ethernet	
Ethernet		
Connectors:	RJ-45	
Communication speed:	10/100Mb	
Ethernet status indication:	LED link	
Preset IP address (ETH):	DHCP, mDNS	
Power		
Version 230V AC	85–265VAC/47 – 63Hz 5W	
Version 24V DC	8-36VDC/1A	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Humidity:	max. 80%	
Degree of protection:	IP20	
Overvoltage category:	II.	
Degree of pollution:	2	
Operating position:	any	
Installation:	DIN rail EN 60715	
Design:	1-MODULE	
Terminal:	max. 2.5 mm ²	
Dimensions and weight		
Dimensions:	94 x 17,6 x 64 mm	
Weight:	72 g	

- The IP-MASTER central unit is a high-performance commanded control unit designed to control iNELS IP-compliant subordinate units.
- IP-MASTER is designed for fully autonomous control of even very large projects consisting of more subordinate central or system units.
- Using the iNELS IP protocol, the unit communicates with the centralized iNELS Cloud environment, which can be used to combine multiple large-scale projects into a centrally controlled project. The iNELS IP protocol also allows the use of the iNELS mobile application to control all devices included in the project.
- Includes Ethernet ports for communication.
- Used for closed communication with miniCU units. The network created in this way is then used for quick communication between the IP Master and the units of the miniCU series and at the same time directly between the individual miniCUs, according to the project parameter settings.
- it is designed for communication via a public network with the centralized iNELS Cloud system or with the iNELS mobile application.
- Communication speed of Ethernet ports is 100 Mbps.
- IPMASTER supports ASCII communication for 3rd Party system.
- Communication and links between individual system elements are set up in the iNELS Designer & Manager configuration software environment, which is designed for Window 7, 8 and 10 systems.

Device description

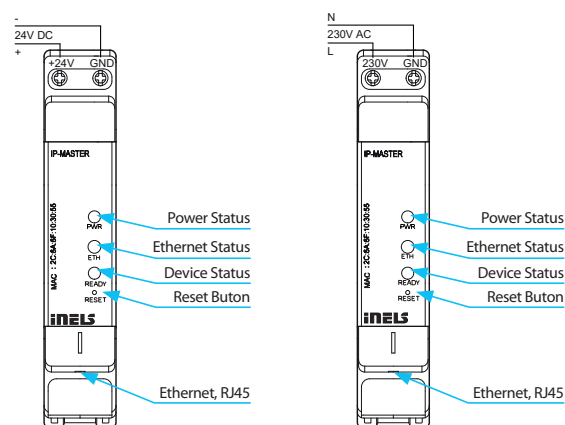

Infrastructure example

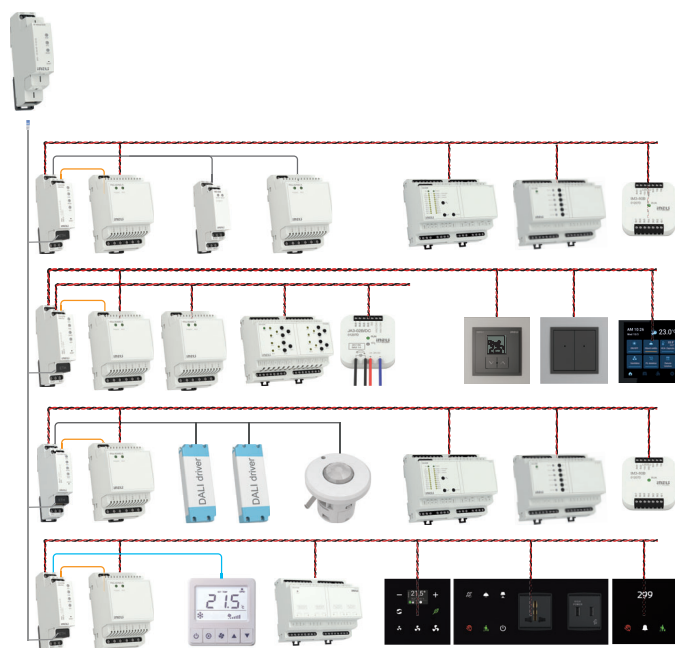




EAN code
CU3-07M: 8595188180108

Technical parameters **CU3-07M**

Indication LED STATUS	
Green LED RUN:	Flashing-communication with BUS, On-no communication
Red LED ERR:	Flashing - no project, ON - unit STOP
Communication	
iNELS BUS	
Indication (LED BUS):	green - unit status indication red - BUS fault indication
Maximum number of units:	max. 32 units to one BUS line
Maximum cable length:	max. 300 m (depends on power loss)
BUS EBM	
Indication:	green - indication communication red - faul indication
Maximum cable length:	max. 300 m
Ethernet	
Connector:	RJ45
Communication speed:	100 Mbps
Indication of the Ethernet (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps
The default IP address:	192.168.1.1
Button RESET	
Restart:	short press
Reset (Factory Reset):	press the button to apply power, release the button 10 s after power is applied
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)
Operating conditions	
Operating temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Humidity:	max. 80%
Protection degree:	IP20 device, IP40 with cover in the switchboard
Overtoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	to the switching board on the EN 60715 DIN rail
Design:	1-MODULE
Terminal:	max. 2.5 mm ²
Dimensions and weight	
Dimensions:	94 x 17.6 x 64 mm
Weight:	72 g

- CU3-07M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the IP-MASTER as part of a larger project.
- The units is equipped with one BUS to which it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max, 1 A, BPS3-01M with 3 A canbe used incase of connected device with more than 1 A.
- The CU3-07M unit is equipped with one EBM bus. The EBM system bus allows to connect central unit with converter DALI/DMX EMDC-64M, (max 4 Nos).
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3).
- Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The units is powered by 27 V DC from inels power supply.
- System units CU3-07M in 1-MODULE design are designed for mounting into a switchboard on DIN rail EN60715.

Connection

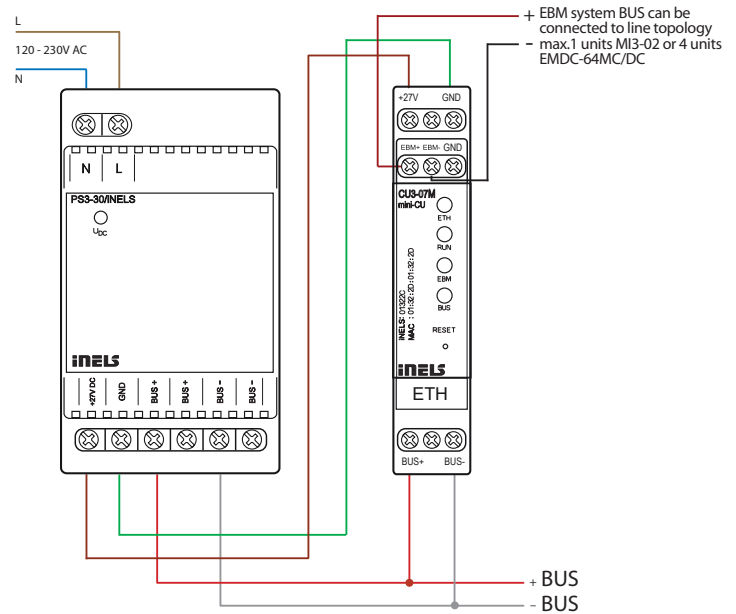

max. 32 units per BUS; max. 1A (PS3-30 / iNELS) per BUS



EAN code
CU3-08M: 8595188184403

Technical parameters **CU3-08M**

Indication LED STATUS

Green - RUN:	The main program runs
Red- ERR:	The main program stalled

Communication

System bus BUS1/BUS2	
Status indication (LED BUS):	green - indication of the operating status of the bus red - error indication on the bus
Maximum number of units:	2x32 Units
Maximum line length:	max. 300 m (depends on power loss)
Ethernet	
Connector:	RJ45
Communication speed:	100 Mbps
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps
Default IP address:	192.168.1.1

RESET button

Restart:	Short press
Reset (factory reset settings):	press the button to bring power on, button release 10 s after power is supplied

Power

BUS1	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)
BUS2	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)

Operating conditions


Working temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Air humidity:	max. 80%
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the control cabinet for DIN rail EN 60715
Design:	1-MODULE
Terminal plate:	max. 2.5 mm ²

Dimensions and weight

Dimensions:	94 x 17.6 x 64 mm
Weight:	72 g

- CU3-08M is one of the basic system control of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the IP-MASTER as part of a larger Project.
- The units is equipped with two BUS, to which it is possible to connect a total of up to 64 elements (2x32) from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used incase of connected device with more than 1 A.
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3). Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The units is powered by 27 V DC from inels power supply. BUS1 can power the central unit.
- System units CU3-08M in 1-MODULE design are designed for mouting into a switchboard on DIN rail EN60715.

Connection

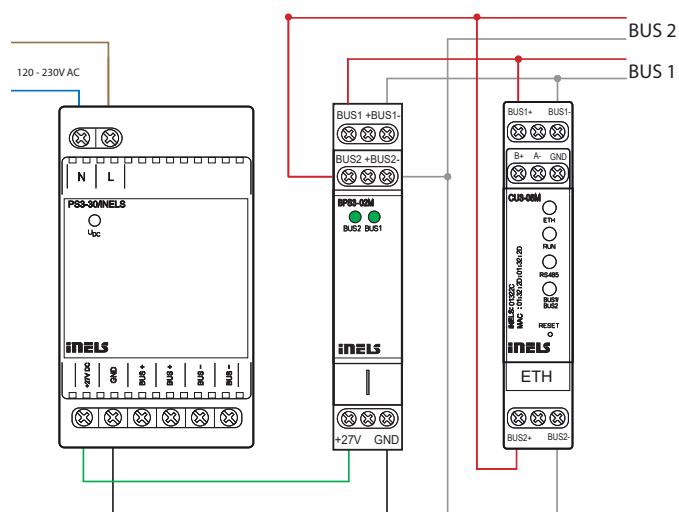




EAN code
CU3-09M/DALI: 8595188184656

Technical parameters		CU3-09M/DALI
Indication LED STATUS		
Green - RUN:	The main program runs	
Red - ERR:	The main program stalled	
Communication		
System BUS		
Maximum number of units:	max. 32 Units	
Status indication (LED BUS):	Green: Bus Operating Status red: error indication on the bus	
Bus power supply:	external DALI power supply must be connected	
Ethernet		
Connector:	RJ45	
Communication speed:	100 Mbps	
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - speedEthernet 100 Mbps	
Default IP address:	192.168.1.1	
RESET button		
Restart:	short press	
Reset (return to factory settings):	press the button to bring power on, button release 10 s after power is supplied	
Power		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Rated current:	50 mA (at 27 V DC)	
Operating conditions		
Working temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Air humidity:	max. 80%	
Degree of protection:	IP20 device, IP40 with cover in the control cabinet	
Surge Category:	II.	
Degree of pollution:	2	
Working position:	any	
Installation:	to the control cabinet for DIN rail EN 60715	
Design:	1-MODULE	
Terminal plate:	max. 2.5 mm ²	
Dimensions and weight		
Dimensions:	94 x 17.6 x 64 mm	
Weight:	72 g	

- CU3-09M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the IP-MASTER as part of a larger project.
- The unit is equipped with one BUS to switch it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used in case of connected device with more than 1 A.
- The CU3-09M/DALI system unit is equipped with one DALI bus.
- The DALI system bus allow control of up to 64 independent DALI ballast addresses for luminaires.
- Addressing of DALI can be done via the iDM software.
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3).
- Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The unit is powered by 27 V DC from iNELS power supply. BUS1 can power the central unit.
- System units CU3-09M in 1-MODULE design are designed for mounting into a switchboard on DIN rail EN60715.

Connection

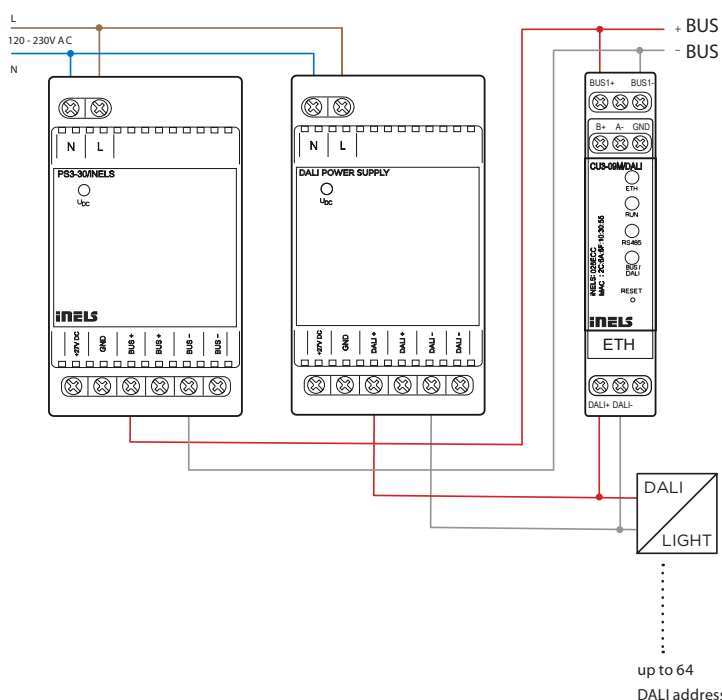



EAN code
CU3-10M: 8595188185219

Technical parameters

CU3-10M

Indication LED STATUS

Green - RUN:	Flashing-communication with BUS, On-no communication
Red- ERR:	Flashing - no project, ON - unit STOP

Communication

System bus BUS1	
Status indication (LED BUS):	green - unit status indication red - BUS fault indication
Maximum number of units:	max. 32 units to one BUS line
Maximum line length:	max. 300 m (depends on power loss)
Ethernet	
Connector:	RJ45
Communication speed:	100 Mbps
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps
Default IP address:	192.168.1.1

RESET button

Restart:	short press
Reset (factory reset settings):	press the button to apply power, release the button 10 s after power is applied

Power

BUS	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)

Operating conditions


Working temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Air humidity:	max. 80%
Degree of protection:	IP20 device, IP40 with cover in the switchboard
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the switching board on the EN 60715 DIN rail
Design:	1-MODULE
Terminal plate:	max. 2.5 mm ²

Dimensions and weight

Dimensions:	94 x 17,6 x 64 mm
Weight:	72 g

- CU3-10M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the IP-MASTER as part of a larger project.
- The unit is equipped with one BUS to which it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used in case of connected device with more than 1 A.
- The CU3-10M system unit is equipped with one Modbus system bus. The Modbus system bus allows control of modbus thermostat and Air condition units (RS-485).
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3). Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The unit is powered by 27 V DC from inels power supply.
- System units CU3-10M in 1-MODULE design are designed for mounting into a switchboard on DIN rail EN60715.

Connection

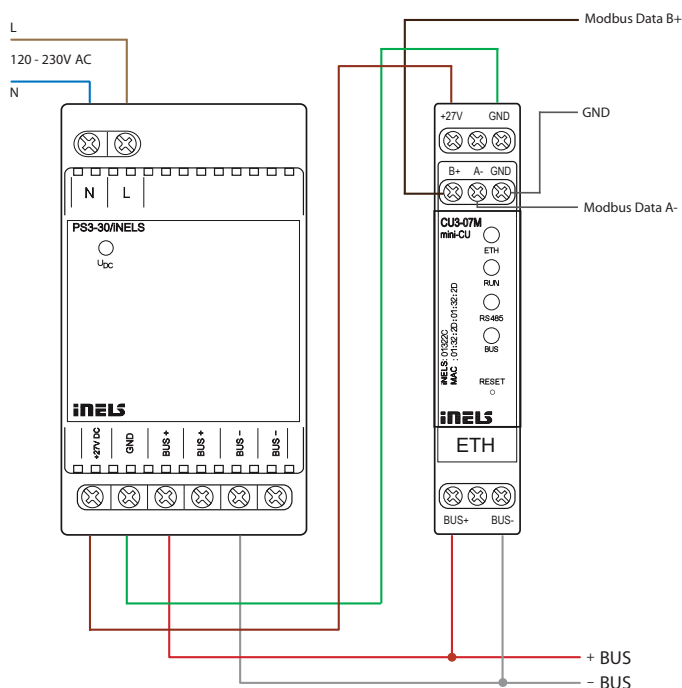



EAN code
PS3-30/iNELS: 8595188180115

Technical parameters

PS3-30/iNELS

Input AC

Supply voltage:	100 - 250 V AC/50 - 60 Hz
Power dissipation:	max. 6.5 W
No-load power (apparent/active):	max. 10 VA/1.5 W
Power consumption at max. Load (apparent/active):	max. 54 VA/33 W
Protection:	T2A fuse inside the device

Outputs

Output voltage:	27 V
Max. load capacity:	1 A
Overall resource efficiency:	> 82 %
Time delay after Connection to AC network:	max. 5 s

Indication LED


Green LED POWER:	Supply voltage indication
Green LED BUS:	indication of the operating status of the bus

Operating conditions

Electrical power INPUT AC - OUTPUT BUS:	4 kV
Connection terminals:	Ordinal
Cross-section of connecting wires (mm ²):	max. 1 x 2.5, max. 2 x 1.5 (With core max. 1 x 1.5)
Working temperature:	-20 °C to +55 °C
Storage temperature:	-30 °C to +70 °C
Working air humidity:	20 to 90 % RH
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	III.
Degree of pollution:	2
Working position:	any, optimally vertical
Installation:	to the control cabinet for DIN rail EN 60715
Design:	3-MODULE
Dimensions:	90 x 52 x 65 mm
Weight:	160 g
Related standards:	general: EN61204, safety: EN61204-7, EMC: EN61204-3

- PS3-30/iNELS is a switched stabilized power supply with a total power of 30 W.
- PS3-30/iNELS is used to power central units and external masters within the iNELS bus wiring.
- PS3-30/iNELS It is equipped with electronic protection against short circuit, overvoltage, power and temperature overload.
- The power supply includes an internally integrated BPS3-01M bus isolator to power one branch of the BUS, from which the iNELS peripheral units are further powered.
- PS3-30/iNELS 3-MODULE is designed for mounting in a switchboard on DIN rail EN60715.

Connection

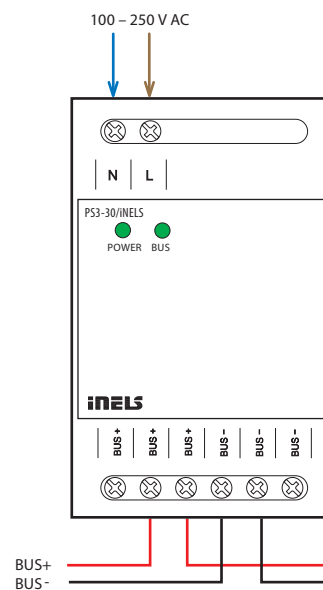




EAN code
 BPS3-01M: 8595188132442
 BPS3-02M: 8595188132435

Technical parameters	BPS3-01M	BPS3-02M
Outputs		
Maximum load capacity:	3 A	2x 1 A
Communication		
Installation bus:	1x BUS	2x BUS
Power		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Power dissipation:	max. 0.5 W	
Rated current without		
Output load:	max. 8 mA	max. 15 mA
Voltage status indication on		
Terminals:	1x green LED	2x green LED
Connection		
Terminal plate:	max. 2.5 mm ² /1.5 mm ² with core	
Operating conditions		
Working temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Cover:	IP20 device, IP40 with cover in the control cabinet	
Surge category:	II.	
Degree of pollution:	2	
Working position:	any	
Installation:	to the control cabinet for DIN rail EN 60715	
Design:	1-MODULE	
Dimensions and weight		
Dimensions:	90 x 17.6 x 64 mm	
Weight:	70 g	85 g


- The BPS3-01M and BPS3-02M units are used for impedance separation of the BUS from the supply voltage source.
- A BPS3-01M or BPS3-02M bus isolator is required for each CU3-XXM central unit and the MI3-02M external master.
- BPS3-01M allows the connection of one BUS branch with a load of max. 3 A.
- BPS3-02M allows the connection of two BUS branches with a load of max. 1 A for each branch.
- The outputs are equipped with overcurrent and surge protection.
- Indication of the output voltage of the BUS outputs by LEDs.
- BPS3-01M, BPS3-02M in 1-MODULE design are designed for mounting in a switchboard on DIN rail EN60715.


Connection

BPS3-01M + CU3-07M

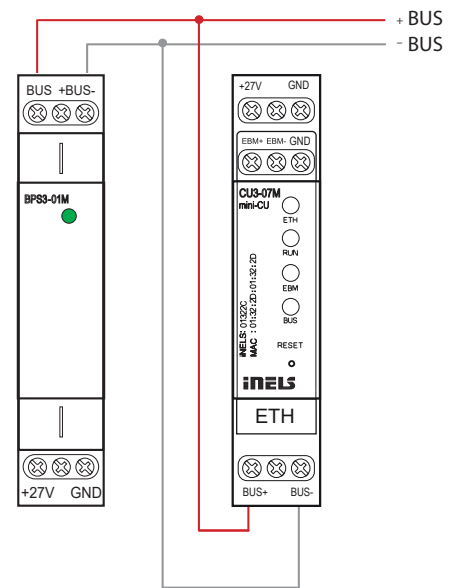

BPS3-02M + CU3-08M

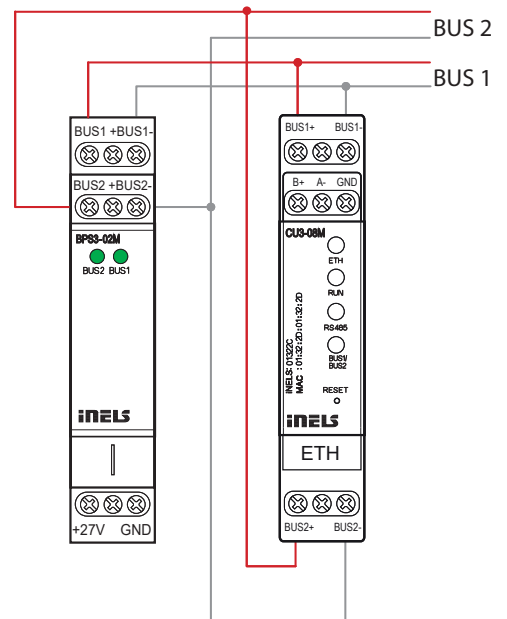

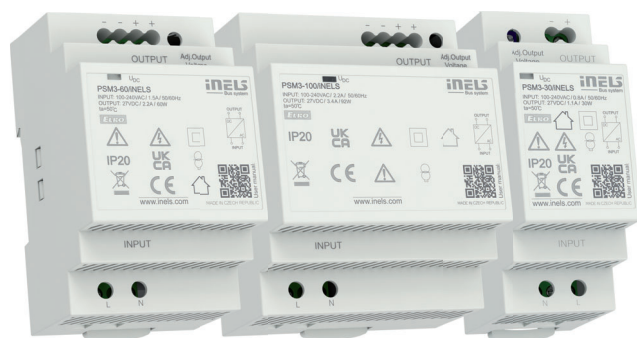


- Used to supply central units and external master within intelligent electroinstallation iNELS.
- Through BUS separators from the supply voltage BPS3-01M and BPS3-02M, it supplies BUS lines from which iNELS peripheral units are also powered.
- Rated output voltage 27V DC with the possibility of regulation.
- High efficiency of up to 90%.
- Low ripple & noise.
- Protection: Overload, Over voltage and Short circuit.
- Continuously adjustable output voltage to adapt to the specific application, e.g. the need to compensate for the voltage drop caused by the length of the line.

EAN code:
 PSM3-100/iNELS - 8595188184786
 PSM3-60/iNELS - 8595188184779
 PSM3-30/iNELS - 8595188184762

Technical parameters	PSM3-30/iNELS	PSM3-60/iNELS	PSM3-100/iNELS
Input			
Voltage range:	AC 100 - 240 V (50-60 Hz)		
Tolerance:	± 10%		
Efficiency:	89%	90%	90%
Burden without load (max.):	0.4W / 8VA	0.5W / 6.5VA	0.1W / 12VA
Burden with full load (max.):	33W / 60VA	70W / 111VA	105W / 160VA
Inrush current:*	max. 25A at 115V AC/60Hz max. 45A at 240V AC/50Hz	max. 30A at 115V AC/60Hz max. 60A at 240V AC/50Hz	max. 35A at 115V AC/60Hz max. 70A at 240V AC/50Hz
Output			
Rated voltage:	27V DC	27V DC	27V DC
Vol. setting range:	21.5 - 28.5V	20.5 - 29V	24.5 - 28V
Rated current:	1.1A	2.2A	3.4A
Rated power:	30W	60W	92W
Ripple & Noise:	150mV	150mV	150mV
Output indication:	blue LED	green LED	blue LED
Tolerance of output voltage:	5%		
Overload protection:	from 130% - 200% rated output power		
Overvoltage protection:	from 110% - 145% rated output power		
Overcurrent protection:	from 110% - 180% rated output power		
Short circuit protection:	temporarily disconnecting the output		
Other information			
Operating temperature:	-20 až +50°C		
Operating humidity:	20% ~ 90% non-condensing		
Storage temperature:	-40 až +80°C		
Dielectric strength:	3kV AC		
Isolation resistance:	100M Ω / 500V DC / 25°C / 70% RH		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size:	max. 1x 2.5 mm ² , max. 2x 1.5 mm ² solid wire / with sleeve max. 1x 2,5 mm ²		
Terminal torque:			
input terminals	0.3 Nm		
output terminals	0.5 Nm		
Protection degree:	IP20		
MTBF:	200 000 hours minimum, full load at 25°C ambient temperature		
Mounting:	DIN rail EN 60715		
Dimensions:	90 x 35 x 58 mm	90 x 52.5 x 58 mm	90 x 70 x 58 mm
Weight:	120 g	190 g	270 g
Standards:	IEC60950-1, UL508, TUV EN61558-2-16		

* The stated values are valid for the full load from the source

Description

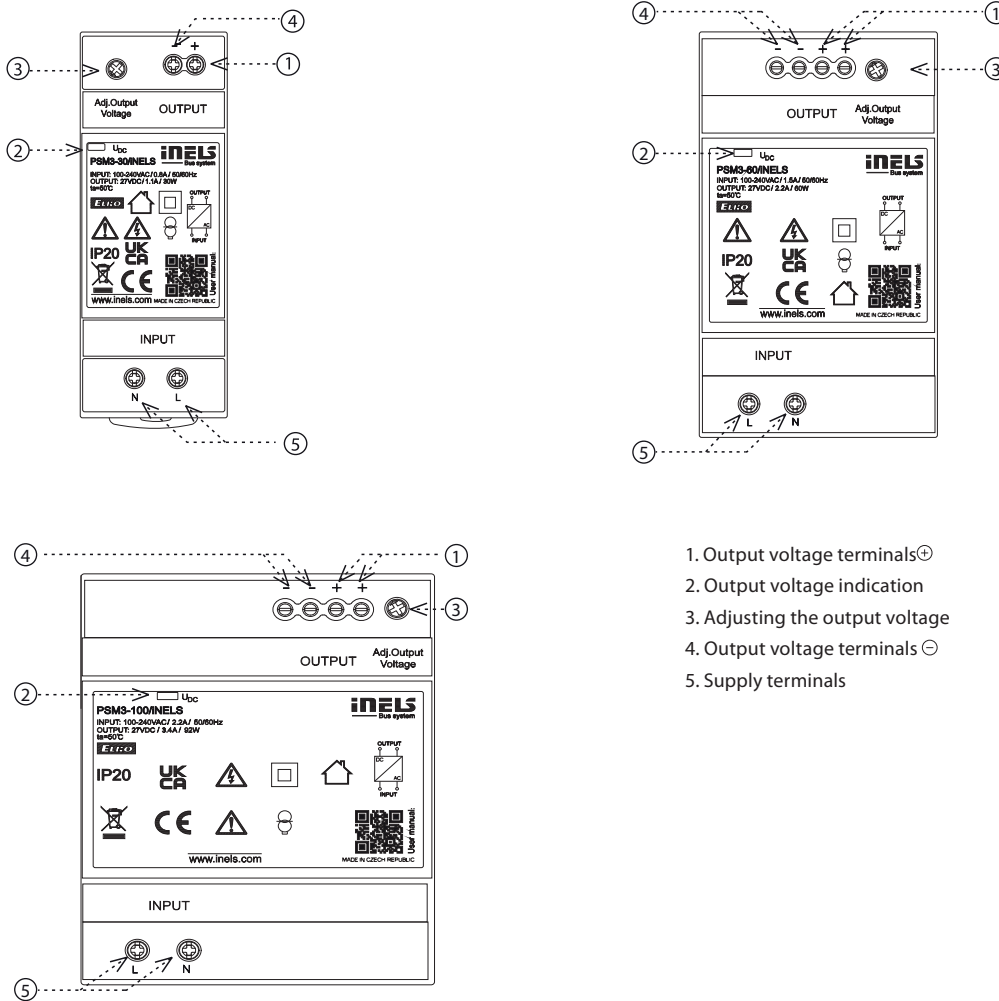


1. Output voltage terminals ⊕
2. Output voltage indication
3. Adjusting the output voltage
4. Output voltage terminals ⊖
5. Supply terminals

Connection

PSM3-30/iNELS


DC 27 V / 1.1 A



AC 100 - 240 V
50 Hz / 60 Hz

PSM3-60/iNELS


DC 27 V / 2.2 A



AC 100 - 240 V
50 Hz / 60 Hz

PSM3-100/iNELS

DC 27 V / 3.4 A



AC 100 - 240 V
50 Hz / 60 Hz

Power supplies PSxM are overcurrent protection devices, because it turns power supplies off, if the output current exceeds more than 30 % of the rated output of the power supply. Therefore, these units are not intended to supply e.g. halogen lamps, because the starting / inrush current (in the cold state) is approximately ten times the amount of the steady-state operating current. So these power supplies cannot turn on such lamps.




EAN code
EMDC-64M: 8595188150309

Technical parameters		EMDC-64M
Power supply		
Supply voltage/tolerance/ Rated current:	AC 230 V (50 - 60 Hz)/ -15/+10 %/max. 100 mA	
DALI power supply:	16 V, 250 mA	
Dissipated power:	max. 3 W	
Communication		
Input interface:	EBM BUS (RS485 communication)	
Output interface:	DALI (max. 64 ballasts) DMX (max. 32 receivers, with repeater up to 64)	
Indication		
Power supply:	green LED Un	
Error surge or short DALI:	illuminated red LED ERR	
Indication of unit status:	LED DALI/DMX (see iNELS installation handbook)	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 °C to +55 °C	
Storage temperature:	-30 °C to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Control device purpose:	operating control device	
Control device construction:	individual control device	
Characteristic of automatic action:	2.5 kV	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	into switchboard on DIN rail EN60715	
Implementation:	3-MODULE	
Dimension and weight		
Dimension:	90 x 52 x 65 mm	
Weight:	140 g	

- The unit EMDC-64M is designed to control DALI electronic ballasts and DMX receivers from the iNELS system.
- EMDC-64M enables control of up to 64 independent electronic ballasts DALI (Digital Addressable Lighting Interface) for fluorescent lamps, LEDs and other light sources.
- EMDC-64M also enables connection of up to 64 DMX receivers (Digital MultipleX).
- Control from iNELS BUS System via EBM BUS.
- DIP switches on the front panel to select the control interface (DALI/DMX).
- Addressing of DALI ballast units can be done via the central unit and iDM3 software or via MINI USB on the front panel of the EMDC-64M and DALI Configurator software.
- The required functionality is set in user project in iDM3 software.
- The unit EMDC-64M is powered from the mains voltage 230 V AC.
- DALI BUS power supply is 16 V/250 mA via an EMDC-64M unit.
- The system BUS EBM is galvanically separated from the BUSes DALI/DMX. Terminals for connecting the DALI BUS are equipped with short circuit and surge protection.
- It is possible to connect up to 8 EMDC-64M units to one EBM BUS.
- If this concerns the last unit on a system BUS EBM, it is necessary to terminate the wire with a resistor with nominal resistance of 120 Ω. The resistor is inside the unit, termination is made by shorting neighboring terminals TERM and EBM+.
- The BUS DMX must be terminated at its end by a resistor with nominal resistive value 120 Ω. The resistor for DMX BUS termination is on the side of the EMDC-64M inside the unit, termination is performed by shorting adjacent terminals TERM and A.
- Updating the firmware of the EMDC-64M can be done through the central unit and software iDM3 or via MINI USB on the front panel and EMDC-64M Flasher software. Updating through MINI USB must be done while system BUS EBM is disconnected.
- When configuring DALI addresses two types are necessary to distinguish:
 - MASTER - this group includes sensors and detectors and one DALI branch can connect up to 4 DALI MASTER units
 - lighting intensity sensor DLS3-1
 - motion detector DMD3-1
 - SLAVE - electronic lighting ballast
- EMDC-64M in 3-MODULE design is designed for mounting in a control panel on a DIN rail EN60715.

Connection

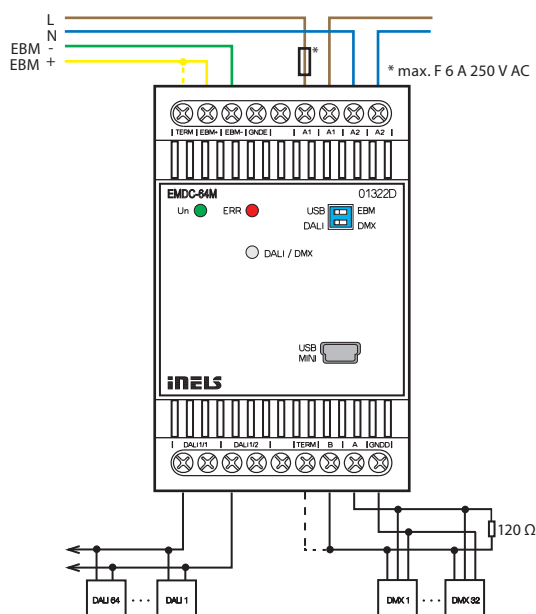



EAN code
DMD3-1: 8595188157513

Technical parameters **DMD3-1**

Inputs	
Angle of motion detection:	140°, 4 m
Recommended installation height:	2.5 - 3 m
Changing the PIR sensitivity:	yes, 0 to 127 (max. sensitivity)
PIR scan type:	single/dual
Default setup PIR:	99 dual
Temperature measuring:	yes, built-in temperature sensor
Scope and accuracy of temp. measurement:	-25 to +110 °C; ± 0.3 °C
Humidity measurement:	YES
Humidity meas. range:	0 to 99 % RH
Humidity meas. accuracy:	± 4 % RH
Light Metering:	yes
Detection angle:	± 55 °
Measuring range:	1 - 100 000 lx
Number of control buttons:	1

Outputs	
Indication red LED:	identification DALI MASTER/communication options
Indicating blue LED:	PIR activation
Indication green LED RUN:	communications/unit status

Communication	
Interface:	installation iNELS BUS, DALI

Power supply	
From iNELS BUS:	27 V DC, -20/+10 %
Rated current:	18 mA
From DALI BUS:	16 V (max. 23 V)
Rated current:	27 mA
Dissipated power:	max. 0.5 W

Connection	
Terminals:	0.3 - 0.8 mm ²

Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Operation position:	vertical
Installation:	ceiling

Dimension and weight	
Dimension:	Ø 76 x 73 mm
- installation hole diameter:	60 mm
- diameter visible:	76 mm
Weight:	81 g

For proper function of the detector it is necessary to eliminate all interference from heat or light sources in the sensing area.


The detector cannot be installed on an unstable or vibrating surface.

Lower mounting height will reduce the overall size of the detection zone.


The distance from the unit and the colour of the illuminated area affects the resulting value of the measured illumination by the DMD3-1 unit.

- DMD3-1 is a combined detector for ceiling mounting.
- Possibilities to use the DMD3-1:
 - motion detector
 - sensor luminescence
 - temperature measuring
 - humidity measurement
- The unit is equipped with two communication interfaces:
 - installation iNELS BUS.
 - DALI (a maximum 4 pcs of DMD3-1 or DLS3-1 units can be used on one DALI bus).
- The motion detector is used to detect people moving in the area. Using the passive scanning infrared spectrum for detection.
- Integrated luminescence sensor can be used for sensing current luminescence at the point of installation of the unit. This information can be used in tasks to maintain a constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Setting the communication interface is done using the SET button.
- The unit can be configured via the iNELS3 Designer & Manager software, which, among other things it is possible to:
 - set the desired function depending on detected motion
 - resolve jobs based on the value of luminescence
 - enable/disable the alarm LED on the detector housing
- DMD3-1 detector is designed for indoor installation and is not intended for outdoor use.
- DMD3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).

Connection

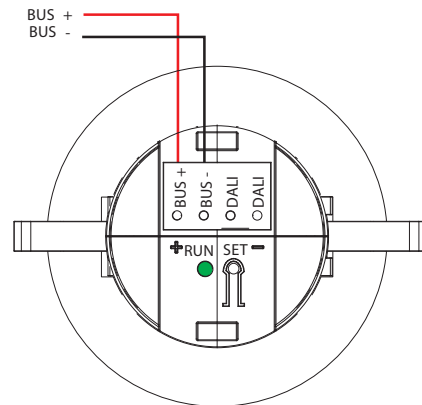

Scanning range

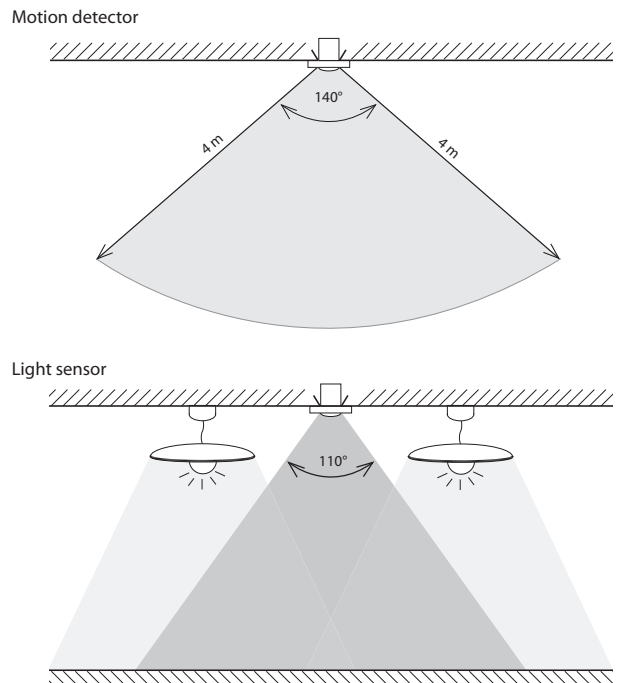



EAN code
DLS3-1: 8595188157506

Technical parameters

DLS3-1

Inputs

Range of measurement of lighting:	1 - 100 000 lx
Detection angle:	40 °

Outputs

Indication red LED:	identification DALI MASTER/setting indication
Indication green LED RUN:	communications/unit status

Communication

Interface:	installation iNELS BUS, DALI
------------	---------------------------------

Power supply

From iNELS BUS:	27 V DC, -20/+10 %
Rated current:	12 mA (27 V DC)
From DALI BUS:	16 V (max. 23 V)
Rated current:	20 mA (16 V DC)
Dissipated power:	max. 0.5 W

Connection

Terminals:	max. 1x2.5, max. 2x1.5/with sleeve max. 1x2.5 mm ²
------------	---

Operating conditions

Operating temperature:	-30 to +60 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP65
Operating position:	vertical


Dimension and weight

Dimension:	96 x 62 x 34 mm
Weight:	100 g

For proper function of the detector it is necessary to eliminate all sources of light interference in the sensing area.

- The luminescence sensor DLS3-1 is for sensing the current luminescence at the point of installation of the unit.
- The DLS3-1 sensor is equipped with two communication interfaces:
 - iNELS BUS installation
 - DALI (a maximum 4 pcs of DMD3-1 or DLS3-1 units can be used on one DALI bus).
- Information about the current value of the light intensity can be used in tasks of maintaining constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Thanks to the DLS3-1 units cannot only be used in residential projects, but also in commercial projects, offices or manufacturing plants, warehouses.
- The DLS3-1 unit is recommended to be installed so that the luminescence sensor for sensing faces down and should not be exposed to direct radiation.
- Setting up a communication interface with DIP switches no. 1:
 - in the upper position determines the communication interface DALI
 - in the lower position determines the communication interface iNELS.
- The DLS3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).
- The unit can be configured via iNELS3 Designer & Manager software, which, amongst other things it is possible to:
 - Set the desired functions according to the detected illumination.
 - The sensing range is 1-100 000 lux.
 - The DLS3-1 unit is supplied in IP65 and so can be installed in the outdoor environment.

Connection

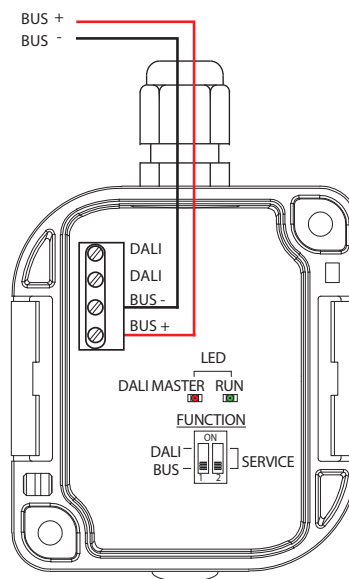



EAN code
ADC3-60M: 8595188133012

Technical parameters **ADC3-60M**

Input	
Analog inputs:	6x voltage, current or temperature input
Number of inputs:	6
Galv. separation from inner circuits:	no
Diagnostic:	indication (exceeding the range, interruption of a sensor or overload of Uref output) by the applicable red LED
Common terminal:	COM
Converter resolution:	14 bits
Input resistance	
- for voltage ranges:	approx. 150 kΩ
- for current ranges:	100 Ω
Types of inputs/measuring ranges*:	Voltage (U): 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) Current (I): 0 ÷ +20 mA (I) ; 4 ÷ +20 mA (I) temperature: input at ext. temperature sensor TC, TZ see accessories/according to used sensor from -40 °C to 125 °C

Outputs of the Uref1 and Uref2 voltage

Voltage**/current of Uref1:	10 or 15 V DC/100 mA
Voltage**/current of Uref2:	10 V DC/20 mA

Communication

Installation BUS:	BUS
Unit status indication:	green LED RUN

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	100 mA (at 27 V DC), from BUS

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions

Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into a switchboard rail to DIN EN 60715
Design:	3-MODULE

Dimensions and weight


Dimensions:	90 x 52 x 65 mm
Weight:	112 g

* selectable for each input/output individually by configuration in the user program iDM3. Min. supply voltage 24 V DC must be respected when configuring 15 V DC and 100 mA consumption.

** according to load Uref output.

- ADC3-60M is an analog-to-digital converter and is equipped with 6 analog inputs.
- Analog inputs serve to connect temperature sensors or analog sensors that generates current or voltage signal.
- The analog inputs have a resolution of a 14-bit AD converter.
- The analog inputs have a common terminal COM.
- Analog inputs/outputs are configurable in iDM3 independently as voltage (U) or current (I) or temperature.
- We recommend Clima sensor as a meteo station. There are four types: five to eight outputs. The top series offers measuring of: rainfall, brightness, twilight, speed of wind, temperature and relative humidity.
- The red LEDs in the front panel indicate exceeding the range, interruption of a sensor or overload of Uref output.
- The temperature inputs at the top of the terminal are used to connect the following temperature sensors: TC, TZ.
- ADC3-60M in 3-MODULE version is designed for mounting into a switch-board, on a DIN rail EN60715.

Connection

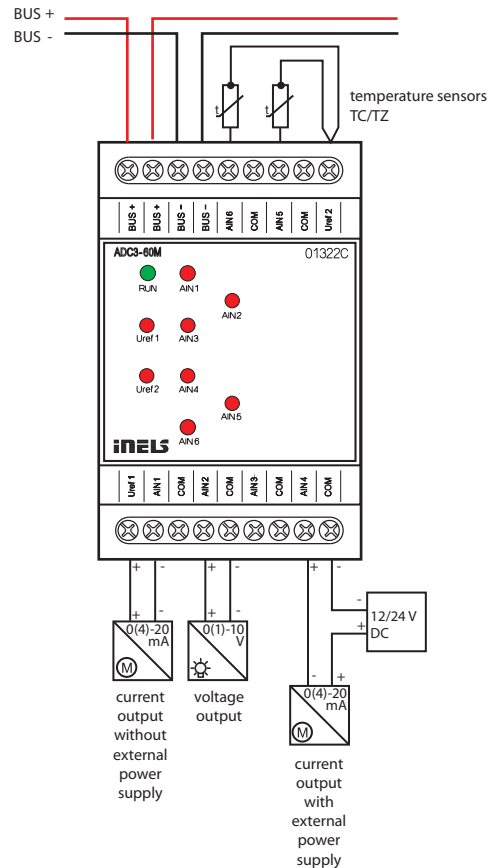



EAN code
DAC3-04M: 8595188132565

Technical parameters

DAC3-04M

Input

Temperature measuring:	yes, input for external temperature sensor TC/TZ
Range/accuracy of temp. measuring:	-20 to +120 °C; 0.5 °C from the range

Outputs

Analog voltage output/rated current:	4x 0(1)-10 V/10 mA
Indication of output overload:	red LED OVERLOAD

Communication

Installation BUS:	BUS
Status indication unit:	green LED RUN

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	50 mA (at 27 V DC), from BUS

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE

Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	108 g

- DAC3-04M is a converter from a digital signal to an analog voltage signal.
- The converter generates 4 analog voltage signals, which can be operated, according to type of controlled device, in a range 0-10 V or 1-10 V.
- This is used for regulating and controlling devices that may be controlled by this signal (dimmable ballasts of fluorescent lamps and other types of light sources - e.g. LED panels from the assortment of ELKO Lighting, dimming actuator for LED and RGB strips RFDA-73M/RGB, thermo drives, servo drives, elements for measuring and regulation and others).
- Range of output voltage is adjustable in iDM3.
- Converter is equipped with a temperature input for connecting a 2-wire external sensor TC/TZ (see accessories).
- DAC3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

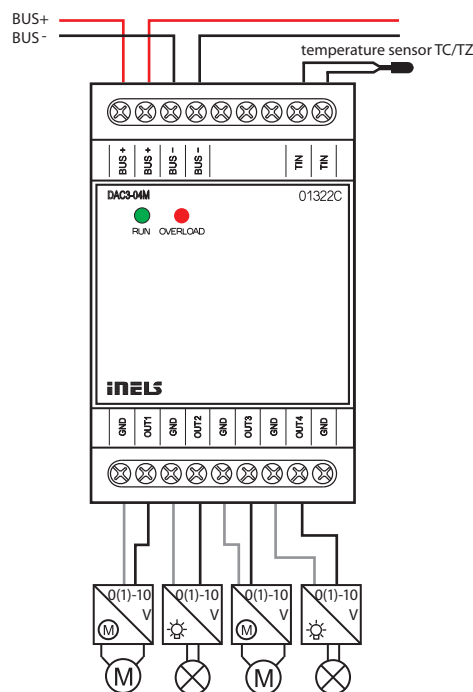



EAN code
JA3-02B/DC: 8595188132718

Technical parameters **JA3-02B/DC**

Inputs

Inputs:	2x AIN/DIN
Resolution:	bit 10
Ext. temperature sensor:	the connection between AIN1/DIN1 and AIN2/DIN2
Type of ext. sensor:	TC/TZ
Temperature measurement range:	-20°C to +120°C
Temperature measurement accuracy:	0.5 °C from range

Outputs

Insulative voltage between outputs and internal circuits:	3.75 kV, SELV by EN 60950
Rated current:	0.85 A*
Peak current:	1.5 A/< 3s
Switched voltage:	12-24 V DC
Output indication UP, (▲):	red (orange) LED
Output indication DOWN, (▼):	green LED

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	60 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN

Connection

Data terminals:	terminal 0.5 - 1 mm ²
Power outputs:	4x conductor CY, 0.75 mm ²

Operating conditions

Operating temperature:	-20 to +50 °C
Storage temperature:	-30 to +70 °C
Protection degree:	IP30
Control device purpose:	operative control device
Control device construction:	individual control device
Characteristics of automatic operation:	1.B.E
Heat and fire resistance category:	FR-0
Anti-shock category (immunity):	class 2
Rated impulse voltage:	2.5 kV
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into an installation box


Dimensions and weight

Dimensions:	49 x 49 x 13 mm
Weight:	32 g

* Maximal operation time of outputs with rated current 0.85 A is 10 minutes...after that the output heating protection activates. The lower the current, the longer duration of protection.

- JA3-02B/DC actuator serves to control blinds, shutters, garage doors, entrance gates, etc.
- Actuator can control electrical motors, which are controlled in 2 directions and have a built-in limit switch.
- JA3-02B/DC controls electric drives with supply voltages up to 24 V DC, where the direction of rotation of the driver is controlled by changing the voltage polarity of the motor.
- The unit is equipped with thermal and overcurrent overload protection of outputs.
- Status of units is indicated by green LED RUN on the front panel:
 - with the supply voltage connected (through BUS) and the unit is not controlled by BUS, LED RUN shines.
 - with the supply voltage connected (through BUS) and the unit is controlled by BUS, LED RUN flashes.
- Status of output contacts UP/DOWN (▲/▼):
 - while contact UP (▲) is switched, red LED shines (orange).
 - while contact DOWN (▼) is switched, green LED shines.
- The unit is also equipped with two analog digital inputs (AIN/DIN), which can be used to connect two potential free contacts (e.g. to connect double button for local control) or a single external temperature sensor TC/TZ (see accessories).
- JA3-02B/DC is designed for mounting into an installation box.

Connection

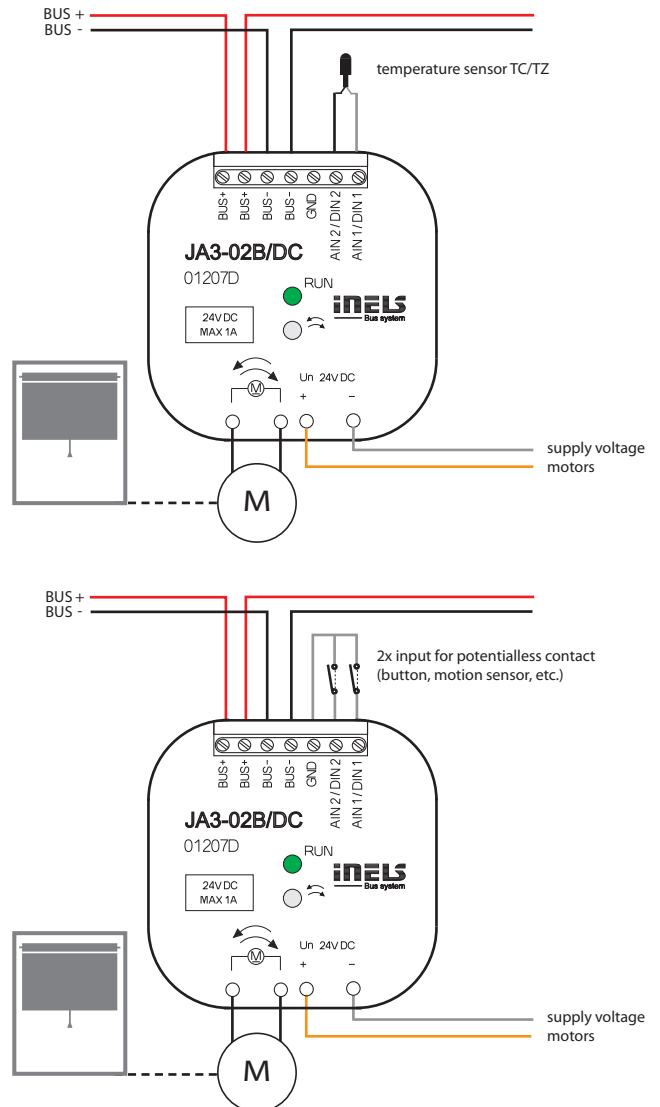



EAN code
JA3-018M: 8595188174466

Technical parameters

JA3-018M

Outputs

Output:	9x changeover 4 A/AC15
Switched voltage:	250 V AC, 24 V DC
Switched output:	1000 W/AC15, 100 W/DC
Peak current:	10 A
Output relays separated from all internal circuits:	basic insulated (Cat. III surges by EN 60664-1)
Isolation between relay outputs GATE1, GATE2 and GATE3:	basic insulated (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Minimal switched current:	100 mA/10 V DC
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	15 min ⁻¹
Mechanical life:	1x 10 ⁷
Electrical life AC1:	1x 10 ⁵
Output indication:	9x yellow LED

Communication

Installation BUS:	BUS
Status indication unit:	green LED RUN

Power supply

Supply voltage by BUS/ tolerance/nominal current:	27 V DC, -20/+10 %, 5mA
Supply voltage of power section (relay) tolerance/ nominal current:	AC 230 V (50 Hz), -15/+10 %, 20 mA
Dissipated power:	max. 2 W

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	vertical
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE


Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	346 g

- JA3-018M is an actuator designed for controlling rollers, shutters, blinds, awnings, garage doors, entrance gates, etc.
- It controls electric drives that are controlled in two directions and have a built-in limit switch.
- The unit's status is indicated by the green RUN LED on the front panel
 - if the power supply is connected, but there is no communication via BUS with master, the LED RUN is on continuously.
 - if the supply voltage is connected and the unit communicates by BUS, the LED RUN flashes.
- The status of the output contacts is indicated by the U/D LED:
 - when the blind/roller blind is moving up/down, the corresponding LED lights up.
 - if the number of switching operations per minute is exceeded, the corresponding LED flashes.
- JA3-018M in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Connection

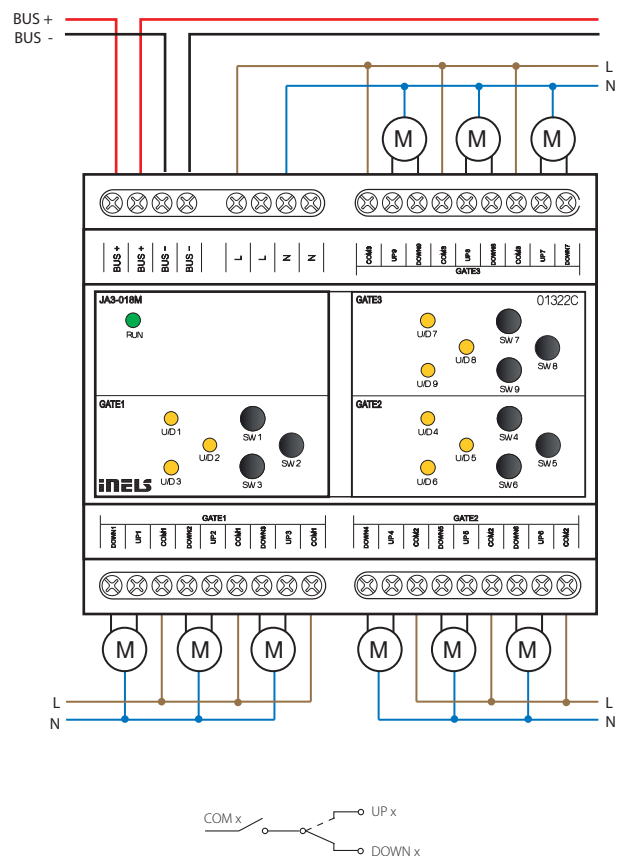

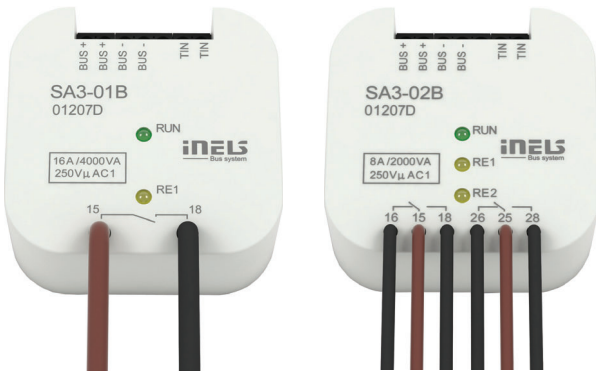


EAN code
 SA3-01B: 8595188132350
 SA3-02B: 8595188132367

Technical parameters	SA3-01B	SA3-02B
Inputs		
Temperature measuring:	Yes, input for external thermo sensor TC, TZ	
Scope and accuracy of tem.meas.:	-20 to +120°C; 0.5°C from the range	
Outputs		
Output:	1x switching 16 A/AC1	2x changeover 8 A/AC1
Switching voltage:	250 V AC, 24 V DC	
Switched load:	4000 VA/AC1, 384 W/DC	2000 VA/AC1, 192 W/DC
Surge current:	30 A; max. 4 s. when repeating 10%	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Insulation voltage between relay outputs RE1-RE2:	x	basic isolation (Cat. II surges by EN 60664-1)
Minimal switching current:	100 mA/5 V	
Switching frequency/no load:	1200 min ⁻¹	300 min ⁻¹
Switching frequency/rated load:	6 min ⁻¹	15 min ⁻¹
Mechanical lifetime:	3x 10 ⁷	1x 10 ⁷
Electrical lifetime for AC1:	0.7x 10 ⁵	1x 10 ⁵
Output indication:	yellow LED	2x yellow LED
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 4 W	
Rated current:	30 mA (at 27 V DC)	50 mA (at 27 V DC)
Status indication unit:	green LED RUN	
Connection		
Data terminals:	terminal, 0.5 - 1 mm ²	
Power outputs:	2x conduct. CY, Ø 2.5 mm ²	6x conduct. CY, Ø 0.75 mm ²
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Protection degree:	IP30	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions:	49 x 49 x 21 mm	
Weight:	50 g	50 g


- Actuators are designed for switching of one (SA3-01B), respectively two (SA3-02B) of various appliances and loads by relay outputs (potentialless contacts).
- SA3-01B contains 1 relay with switching potentialless contact with max. load 16 A/4000 VA/AC1.
- SA3-02B contains 2 relays with switching potentialless contacts with max. load 8 A/2000 VA/AC1.
- Output contacts are separately controllable and addressable.
- Thanks to changeover contacts, the SA3-02B actuator can be used to control a 230 V drive (such as blinds, shutters or awnings), whereas by proper bridging of contacts, it is possible to secure locking hardware options while switching on phase two outputs.
- Actuators are equipped with a temperature input for connecting an external two-wire temperature sensor TC/TZ (see accessories).
- LED on front panel signalizes state of each output.
- SA3 is normally supplied in the option AgSnO₂ contact material.
- SA3-01B, SA3-02B are designed for mounting into the installation box.

Connection

SA3-01B

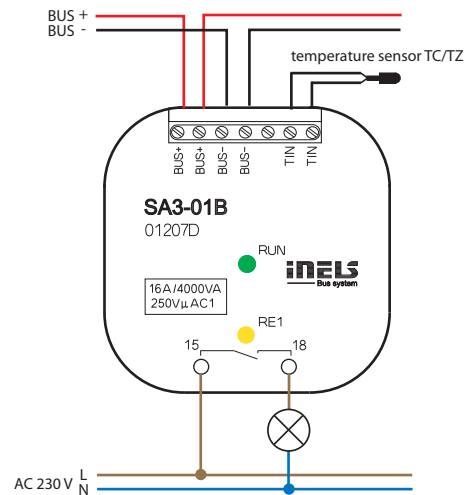

SA3-02B

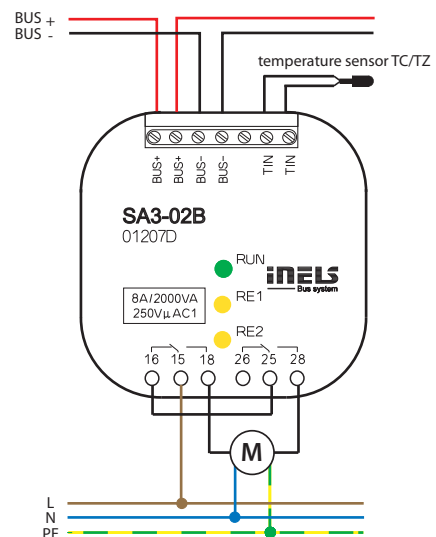



EAN code
SA3-04M: 8595188132381

Technical parameters SA3-04M

Outputs

Output:	4x changeover 16 A/AC1
Switching voltage:	250 V AC, 24 V DC
Switching output:	4000 VA/AC1, 384 W/DC
Surge current:	30 A; max. 4 s. at 10% duty cycle
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs RE1-3 and RE4:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs RE1-3:	basic insulated (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Min. switched current:	100 mA
Switching frequency/no load:	1200 min ⁻¹
Switching frequency/rated load:	6 min ⁻¹
Mechanical life:	3x 10 ⁷
Electrical life AC1:	0.7x 10 ⁵
Output indication:	4x yellow LED

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 4 W
Rated current:	70 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE

Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	164 g

- SA3-04M is a switching actuator containing 4 independent relays with changeover potential-free contacts.
- Maximum load per contact is 16 A/4000 VA/AC1.
- Each of the 4 outputs contacts are individually controllable and addressable.
- All four relays are individually decorated input terminals, and therefore can switch various independent potentials.
- The actuator is designed for switching 4 various appliances or loads by relay outputs (potential free contacts).
- Thanks to changeover contacts, it can be used to control up to two drives 230 V power (such as blinds, shutters or awnings) with appropriate bridging, the contacts can secure hardware blocking the possibility of simultaneous switching of the phase on both outputs, see example of connection.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- Switching actuators SA3 is normally supplied in the option AgSnO₂ contact material.
- SA3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

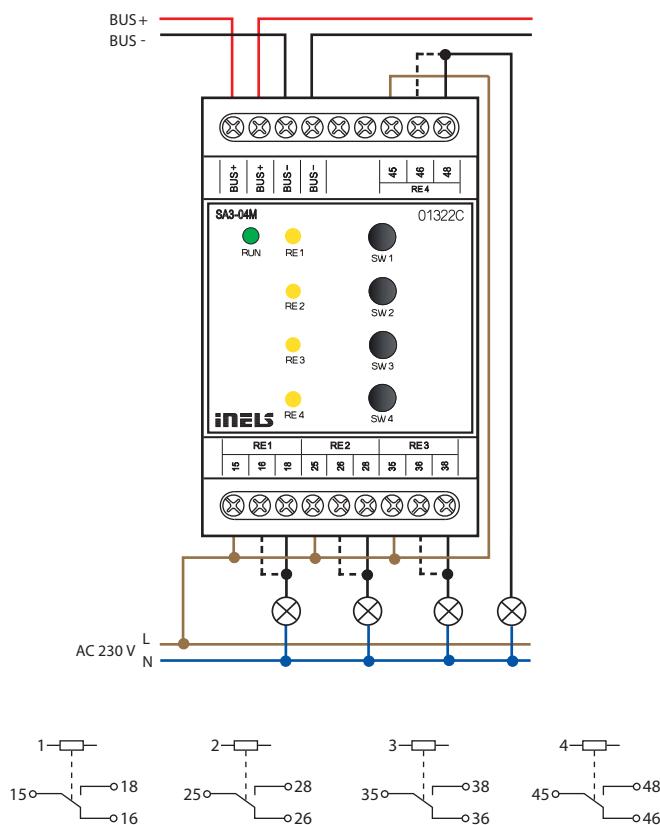




EAN code
SA3-06M: 8595188132879

Technical parameters SA3-06M

Outputs	
Output:	6x changeover 8 A/AC1
Switching voltage:	250 V AC, 24 V DC
Switching output:	2000 VA/AC1, 192 W/DC
Surge current:	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM1 and COM2:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between individual relay outputs:	basic insulated (Cat. II surges by EN 60664-1)
Isolates voltage open relay contact:	1 kV
Max. current terminals COM1 and COM2:	16 A
Min. switched current:	100 mA/5 V DC
Switching frequency/no load:	300 min ⁻¹
Switching frequency/rated load:	15 min ⁻¹
Mechanical life:	2x 10 ⁷
Electrical life AC1:	5x 10 ⁴
Output indication:	6x yellow LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 9 W
Rated current:	60 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Air humidity:	max. 80%
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	160 g

- The actuator is designed for switching up to six various appliances and loads with potentialless contact.
- SA3-06M is a switching actuator contains 6 independent relays with changeover potentialless contacts.
- Maximum load per contact is 8 A/2000 VA/AC1.
- Each of six output contacts are individually controllable and addressable.
- The relays are divided into two groups, the group of four relays on the bottom terminal switches the common potential, a pair of relays on top of the terminal switches the second common potential.
- The actuator is suitable for operating discontinuously controlled thermo drives in the distributor of floor heating.
- LEDs on the front panel signals the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- SA3-06M is normally supplied in the option AgSnO₂ contact material.
- SA3-06M in 3-MODULE version is designed for mounting into a switch-board/DIN rail EN60715.

Connection

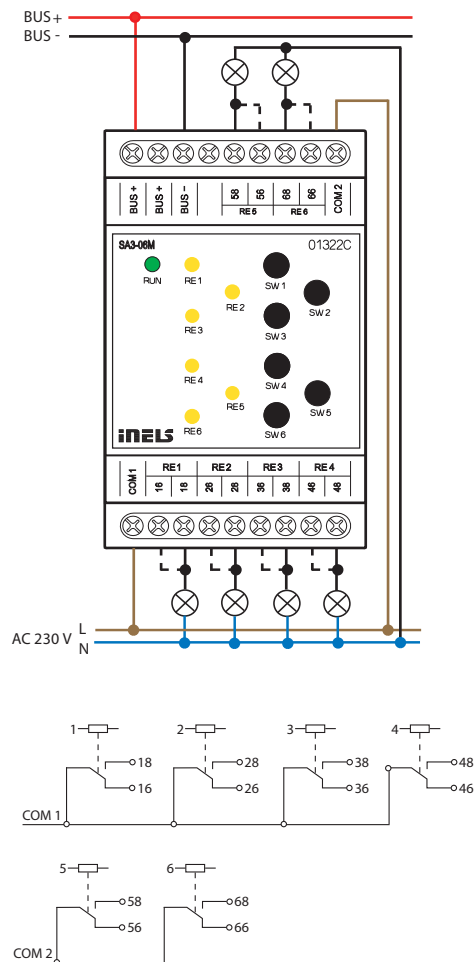



EAN code
SA3-012M: 8595188132466
SA3-012M/120V: 8595188133029

Technical parameters

SA3-012M

SA3-012M/120V

Outputs

Output:	12x switching 8 A/AC1
Switched voltage:	250 V AC, 24 V DC
Switched output:	2000 VA/AC1, 192 W/DC
Peak current:	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM1, COM2 and COM3:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Max. current of one common terminal:	16 A
Minimal switched current:	100 mA/10 V DC
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	15 min ⁻¹
Mechanical life:	1x 10 ⁷
Electrical life AC1:	1x 10 ⁵
Output indication:	12 x yellow LED

Communication

Installation BUS:	BUS
The installation BUS is separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Status indication unit:	green LED RUN

Power supply

Voltage of BUS/tolerance/nominal current:	27 V DC, -20/+10 %, 5 mA	
Supply voltage of power section (relay) tolerance/nominal current:	AC 230 V (50 Hz), -15/+10 %, 20 mA	AC 120 V (60 Hz), -15/+10 %, 40 mA
Dissipated power:	max. 6 W	max. 5 W

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE


Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	310 g

- The actuator is designed for switching twelve various appliances and loads with potentialless contact.
- SA3-012M is a switching actuator containing 12 independent relays with NO potentialless contacts, with the fact that switches the same potential.
- Maximal loadability of contacts is 8 A/2000 VA/AC1.
- Each of the twelve output contacts are individually controllable and addressable.
- Actuator SA3-012M is powered by an AC voltage 230 V. The unit SA3-012M/120 V is powered by AC voltage 120 V AC.
- BUS is galvanically separated from the internal circuits of unit.
- LED on front panel signalizes state of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- SA3-012M is normally supplied in the option AgSnO₂ contact material.
- SA3-012M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

Connection

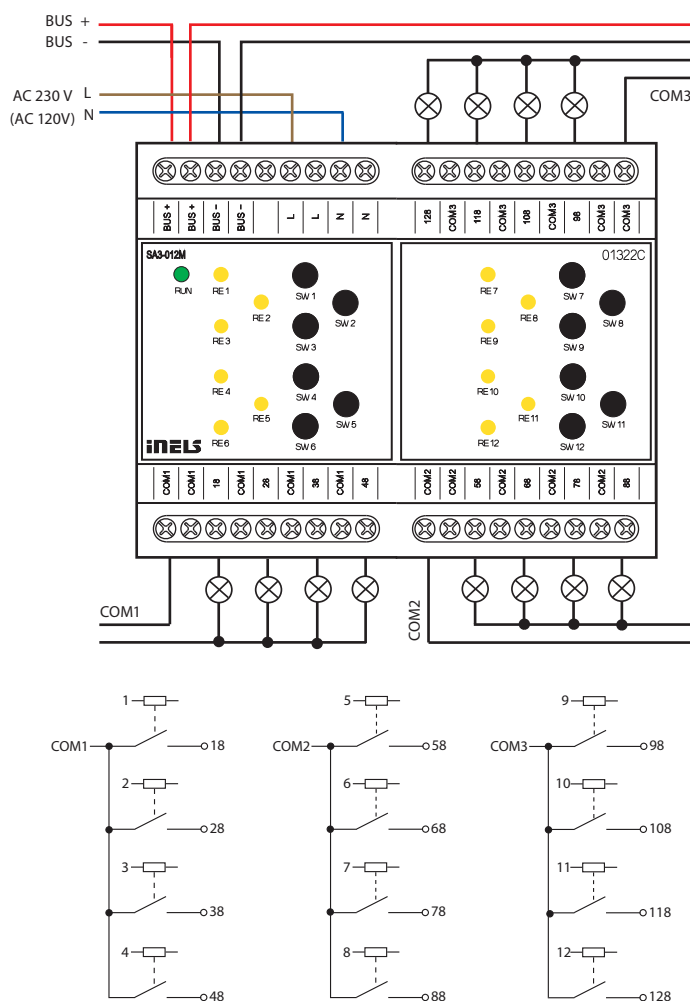

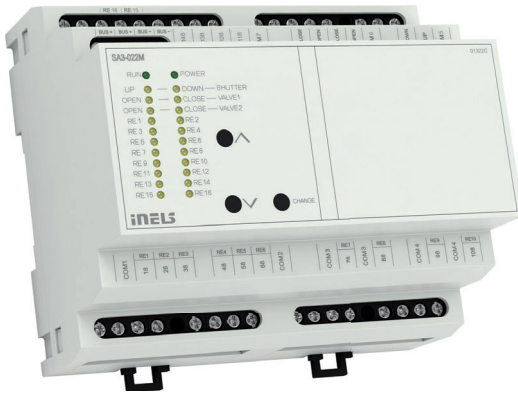



- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6 A and 10 A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC/DC).
- Relay control of the fan coil unit - heating/cooling, 3 fan speeds (24 - 230 V AC/DC).
- Connection to BUS, communication with CU3.
- The front panel LEDs indicate the status of each output.
- SA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

EAN code
SA3-022M: 8595188135269

Technical parameters		SA3-022M
Outputs		
Output indication:	yellow LED	
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Insulation between COM potentials:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolates. voltage open relay contact:	1 kV	
SSR (Electronic Relay):	4x switching (VALVE1-VALVE2)	
Switching voltage:	20 - 240 V AC	
Switching output:	480 VA	
Surge current:	20 A, t ≤ 16 ms	
Relay 6A:	12x switching (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)	
Switching voltage:	250 V AC, 24 V DC	
Switching output:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3	
Minimum switching load:	500 mW (12 V/10 mA)	
Mechanical life:	10x10 ⁶	
Electrical life AC1:	6x10 ⁴	
Relay 10A:	4x switching (RE7 - RE10)	
Switching voltage:	250 V AC, 24 V DC	
Switching output:	2500 VA/AC1, 240 W/DC	
Surge current:	30 A max. 4 s at 10%	
Minimal switched current:	100 mA	
Switching frequency without load:	1200 min ⁻¹	
Switching frequency with rated load:	6 min ⁻¹	
Mechanical life:	3x 10 ⁷	
Electrical life AC1:	0.7x 10 ⁵	
Communication		
Installation BUS:	BUS	
Unit status indication:	green LED POWER	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 3 W	
Rated current:	100 mA (at 27 V DC), from BUS	
Power status indication:	green LED RUN	
Connection		
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	switchboard on DIN rail EN 60715	
Design:	6-MODULE	
Dimensions and weight		
Dimensions:	90 x 105 x 65 mm	
Weight:	307 g	

Connection

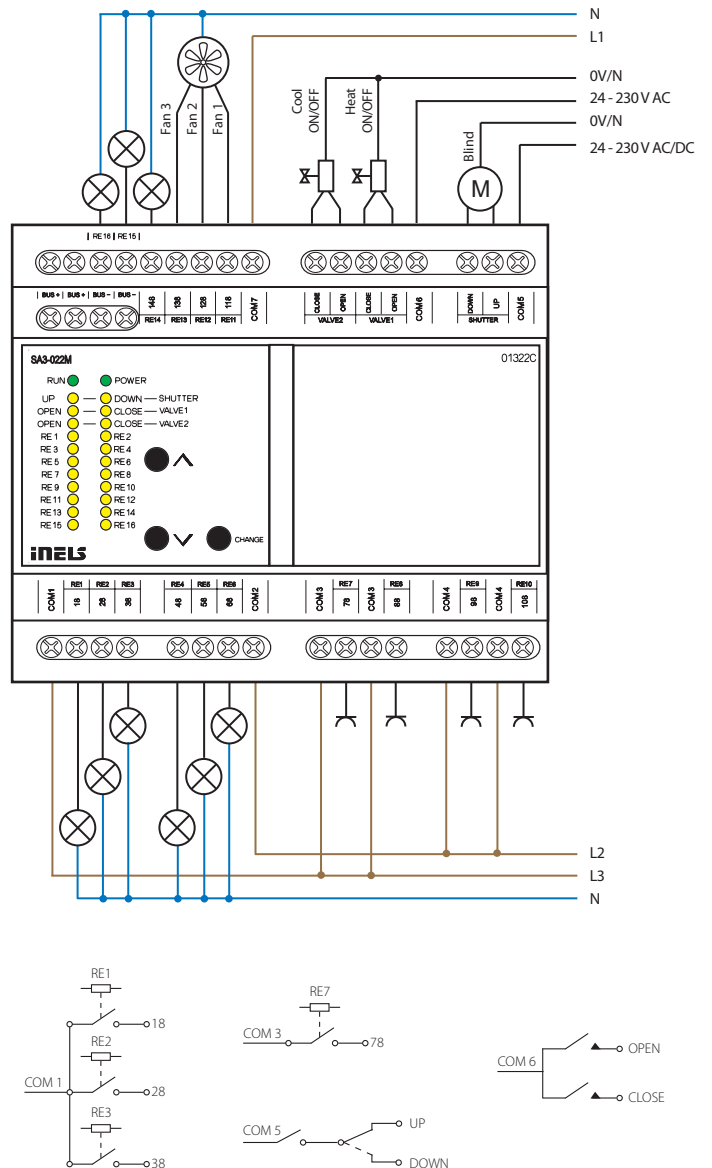

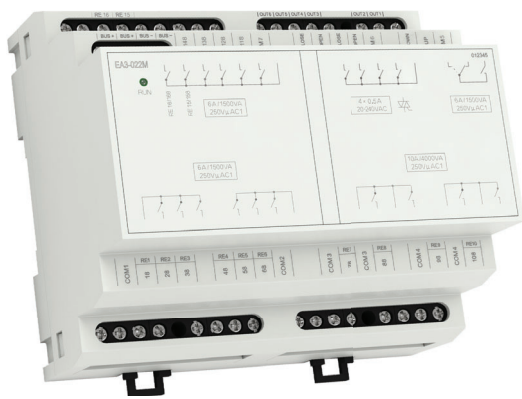

EAN code

EA3-022M: 8595188135238

Technical parameters

EA3-022M

Outputs

Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Insulation between COM potentials:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
SSR (Electronic Relay):	4x switching (VALVE1-VALVE2)
Switching voltage:	20 - 240 V AC
Switching output:	480 VA
Surge current:	20 A, $t \leq 16$ ms
Relay 6 A:	12x switching (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)
Switching voltage:	250 V AC, 24 V DC
Switching output:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3
Minimum switching load:	500 mW (12 V/10 mA)
Mechanical life:	10×10^6
Electrical life AC1:	6×10^4
Relay 10 A:	4x switching (RE7 - RE10)
Switching voltage:	250 V AC, 24 V DC
Switching output:	2500 VA/AC1, 240 W/DC
Surge current:	30 A max. 4 s at 10 %
Minimal switched current:	100 mA
Switching frequency without load:	1200 min^{-1}
Switching frequency with rated load:	6 min^{-1}
Mechanical life:	3×10^7
Electrical life AC1:	0.7×10^5

Communication

Installation BUS:	BUS
Unit status indication:	green LED RUN

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	100 mA (at 27 V DC), from BUS

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE

Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	337 g

- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6 A and 10 A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC/DC).
- Relay control of the fan coil unit - heating/cooling, 3 fan speeds (24 - 230 V AC/DC).
- Connection to BUS, communication with CU3.
- EA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

Connection

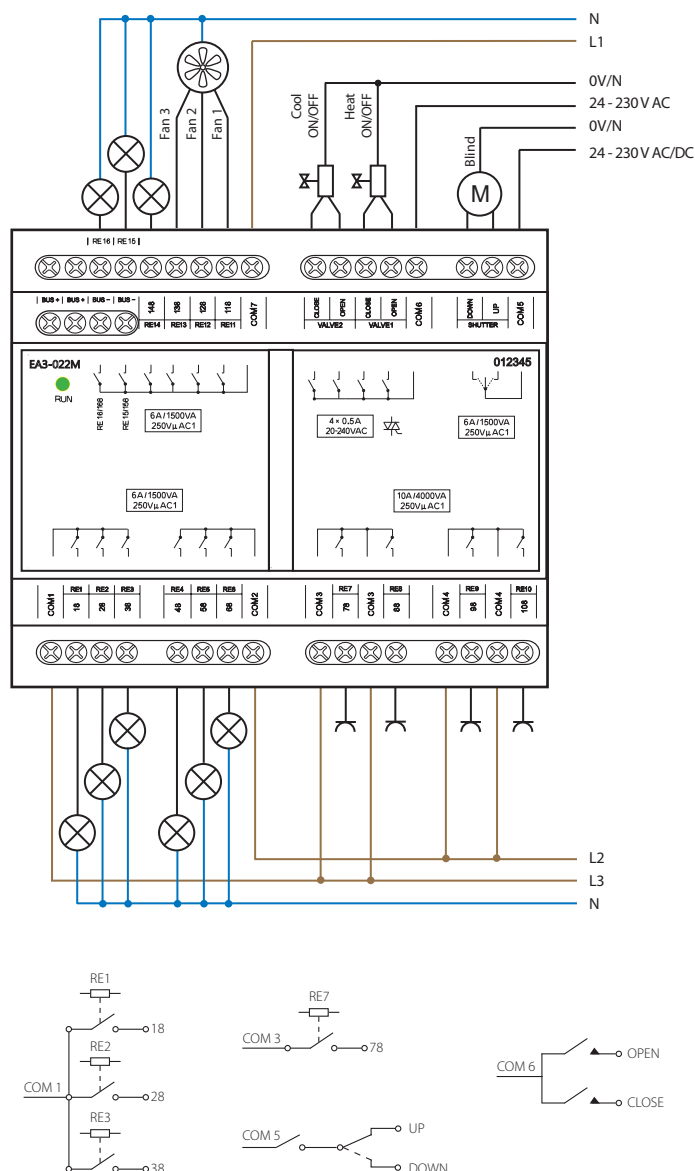



FAN code
 DA3-22M: 85951881332626
 DA3-22M/120V: 8595188133036

Technical parameters	DA3-22M	DA3-22M/120V
----------------------	---------	--------------

Inputs		
Input:	2x inputs, switching potential L*	
Temperature measuring:	YES, input for external thermo sensor TC/TZ	
Scope and accuracy of temp. measurement:	-20 to +120 °C; 0,5 °C from the range	
Number of control buttons:	2x buttons 4x potentiometers on front panel	

Outputs		
Output:	2x contactless outputs, 2x MOSFET	
Load type:	resistive, inductive, capacitive**, LED, ESL	
Isolation BUS separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolation voltage between particular power:	max. 500 V AC	
Minimal controlled load:	10 VA	
Maximal controlled load:	400 VA for each channel	200 VA for each channel
Output indication ON/OFF:	2x yellow LED	
Device protection:	thermal/short-term overload/ long-term overload	

Communication		
Installation BUS:	BUS	

Power supply		
Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %	
Rated current:	5 mA (at 27 V DC), from BUS	
Status indication unit:	green LED RUN	
Supply voltage for power section/tolerance:	AC 230 V (50 Hz), -15/+10 %	AC 120 V (60 Hz), -15/+10 %
Dissipated power:	max. 13 W	max. 7.5 W

Connection		
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve	


Operating conditions		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +35 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	switchboard on DIN rail EN 60715	
Design:	3-MODULE	

Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	170 g	

* The inputs are not galvanically isolated from the supply voltage.
 ** **Attention:** It is not allowed to connect loads of inductive and capacitive character, at the same time.
 ⚠ Input is connected to the mains voltage potential.

- DA3-22M is a universal dimming 2-fold actuator enabling control of brightness intensity of dimmable light sources of the type ESL, LED and RLC with power supply 230 V.
- DA3-22M has two MOSFET controlled outputs 230 V AC, maximum load is 2x 400 VA.
- Option of connecting an external temperature sensor.
- Each output channel is independently controllable and addressable.
- Type of light source is set by a switch on the front panel.
- By setting the min. brightness potentiometer on the front panel, flashing of different types of light sources is eliminated.
- DA3-22M is equipped with two inputs 230 V AC, which can be controlled by mechanical switches (buttons, relays). Inputs are galvanically connected to potential L, which is permanently at the terminals IN1 and IN2.
- By clicking on buttons on the front panel you can manually switch on or off the corresponding output.
- Electronic overcurrent and thermal protection - switch off output in case of overload short circuit and overheating.
- The power supply (potential L) must be protected by a protective element corresponding to the power input of the connected load, e.g. a safety fuse.
- During installation, it is necessary to leave on each side of the actuator at least half the module space for better cooling.
- DA3-22M in 3-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Connection

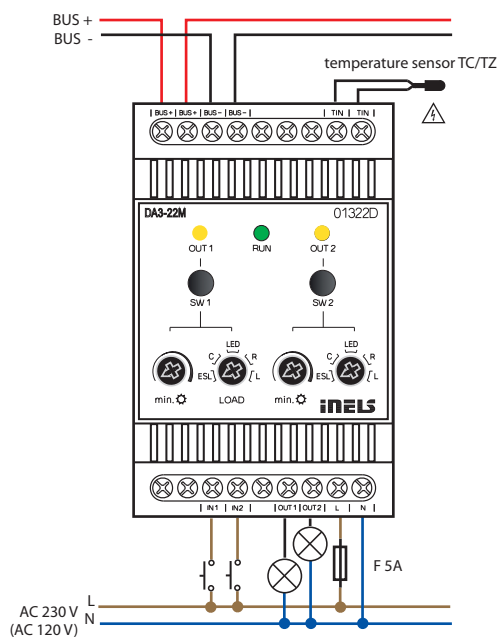

Types of connectable loads

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimnable energy-saving fluorescent tubes

NEW



EAN code
DA3-66M /230: 8595188182065
DA3-66M /120: 8595188174459

Technical parameters DA3-66M/230V DA3-66M/120V

Inputs

Input:	6x contactless outputs, 2x MOSFET / channel
Load type:	resistive, inductive, capacitive**, LED, ESL
Isolation BUS separated from all internal circuits and outputs:	reinforced insulation (Cat. II surges by EN 60664-1)
Insulation voltage between units power outputs:	max. 500 V AC
Minimal controlled load:	10 VA
Maximal controlled load:	DA3-66M / 230V: 150 VA for each channel DA3-66M / 120V: 75 VA for each channel possibility of parallel connection of outputs
Inputs:	6x galvanically separated
Input voltage:	20–230 AC(50–60 Hz)/DC
Isolation voltage:	between inputs max. 230 VAC/DC (basic insulation) to all other internal circuits: reinforced insulation: overvoltage category II
Maximum cable length:	50 m
Glow plug connection:	no
Output indication ON/OFF:	6x yellow LED
Device protection:	thermal/short-term overload/ long-term overload

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %	
Rated current:	100 mA (at 27 V DC), from BUS	
Status indication unit:	green LED RUN	
Supply voltage for power section/tolerance:	AC 230 V (50 Hz), -15/+10 %	AC 120 V (60 Hz), -15/+10 %

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions

Air humidity:	max. 80 %
Operating temperature:	-20 to +50 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	vertical
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE


Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	320 g

* **Attention:** It is not allowed to connect loads of inductive and capacitive character, at the same time.

- DA3-66M is a universal dimming 6-channels actuator, which is used to control the brightness of dimmable light sources such as ESL, LED and RLC with 230 V power supply.
- The DA3-66M has 6 semiconductor controlled 230 V AC outputs. The maximum possible load is 150 VA for each channel.
- The individual outputs of the dimmer can be connected in parallel and thus increase the maximum output load at the expense of the number of outputs.
- Each output channel is independently controllable and addressable.
- The type of light source is set with a switch on the front of the device.
- By setting the min, the brightness potentiometer on the front of the device eliminates flickering of different types of light sources.
- Min. brightness and type of load is performed using SW IDM.
- Use the control buttons on the front panel to manually control the output.
- The actuator is equipped with electronic overcurrent and thermal protection, which switches off the output in case of overload, short circuit, overheating.
- During installation, it is necessary to leave at least half of the module space free on each side of the actuator for better cooling.
- DA3-66M is in 6-MODULE version and is intended for mounting in a switchboard on DIN rail EN60715.
- The dimmer has 6 galvanically separated inputs which can be used both to control the dimmer and as a binary input to the INELS system.
- The the device supply (potential L) must be protected with a safety device corresponding to the power input of the connected load, e.g. with a quick-release fuse.

Connection

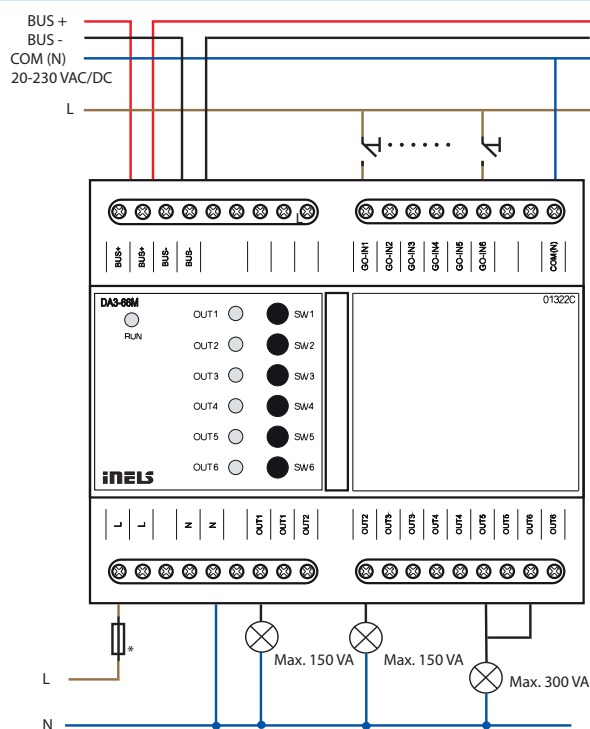

Types of connectable loads

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimmable energy-saving fluorescent tubes




EAN code
DA3-03/RGBW: 8595188184632

Technical parameters	DA3-03M/RGBW
Output	
Dimmable load:	LED strip 12 V, 24 V, 48 V; RGBW LED strip 12 V, 24 V, 48 V
Number of channels:	3x 4 12x 1
Surge current:	3x 15 A 12x 3,75 A
Switching voltage:	0–50 V DC stabilized
Dimmable performance:	max. 400 W
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %
Rated current:	5 mA (from 27 V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 to +35 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	vertical
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	170 g

* Max. Tightening Torque for antenna connector is 0.56 Nm.

- The dimmer for LED strips is used for independent control of 12 channels, so it can be connected to, for example:
 - 3 RGBW led strips
 - 3 RGB led strips + 2 single colour strips
 - 12 single colour LED strips
- The 3-module design of the device with mounting in the switchboard allows the connection of a dimmable load of 3x 15 A or 12x 3.75 A, which represents, for example: 3 pieces of RGBW LED strips 24 V 20W/m = max 18m.
- The dimmer is controlled by the central unit of the iNELS system.
- The power supply of the LED strip is in the range of 0-50V DC.
- Each of the output channels is separately controllable and addressable.
- The actuator is equipped with electronic thermal protection, which switches off the output in case of overheating.
- During installation, it is necessary to leave at least half a module of free space on each side of the actuator for better cooling.
- DA3-03M/RGBW in 3-MODUL design is intended for installation in a switchboard on an EN60715 DIN rail.

Connection

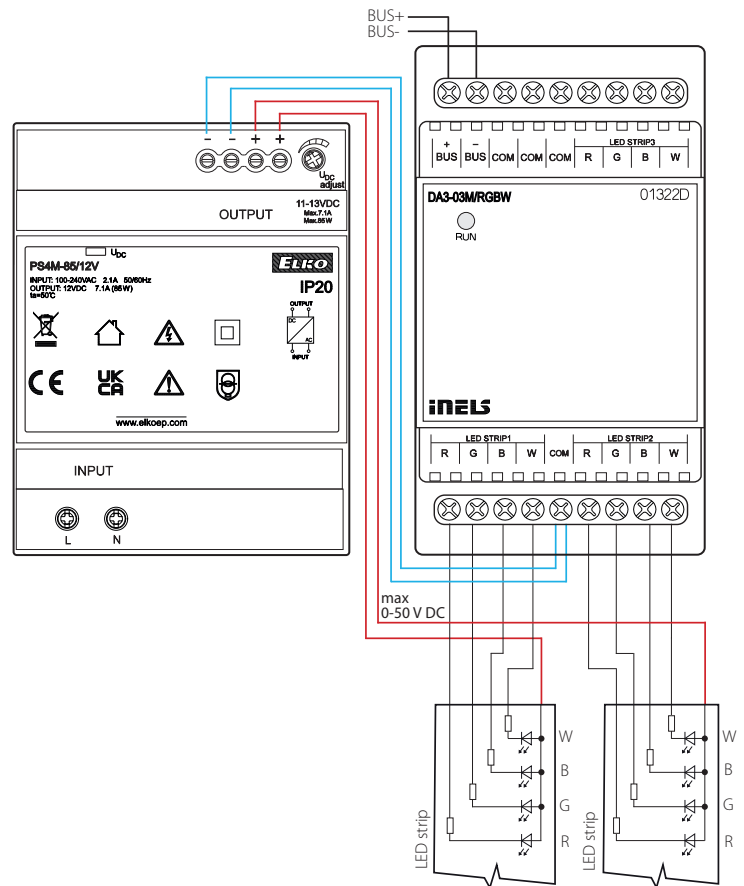



EAN code
LBC3-02M: 8595188132688

Technical parameters LBC3-02M

Inputs

Number of control buttons: 2 buttons on the front panel

Outputs

Output:	2x 0(1)-10 V/10 mA 2x changeover 16 A/AC1
Switching voltage:	250 V AC, 24 V DC
Switching capacity:	4 000 VA/AC1, 384 W/DC
Peak current:	30 A; max. 4 s. at duty cycle 10%
Insulation voltage between individual relay outputs RE1aRE2 and internal circuits:	4 kV reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Minimal switched current:	100 mA
Frequency of switching/no load:	1 200 min ⁻¹
Frequency of switching/rat. load:	6 min ⁻¹
Mechanical life:	3x 10 ⁷
Electrical life AC1:	0.7x 10 ⁵
Output indication:	2x yellow LED

Communication

Installation BUS: BUS

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	60 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN

Connection

Terminal: max. 2.5 mm²/1.5 mm² with sleeve

Operating conditions


Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE


Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	134 g

- LBC3-02M is an analog 2-channels actuator designed to control dimmable ballasts of fluorescent lamps or other light sources controlled by signal 0(1) - 10 V DC.
- In the iDM3, it is possible to set the output mode 0(1) - 10 V DC.
- During analog voltage output (0)1-10 V DC control, relay contact automatically switches power supply to light ballast (0% = relay OFF, 1-100% = relay ON)
- LBC3-02M contains 2 independent analog voltage outputs (0)1-10 V DC and their dependents 2 relays with potential-free contact.
- Maximum contacts load 16 A/4000 VA/AC1.
- Each of 2-channels is separately controllable and addressable.
- LEDs on front panel signals status of each channel.
- With control buttons on the front panel, it is possible to change the status of each channel separately.
- LBC3-02M in 3-MODULE version is designed for mounting into a switch-board/ DIN rail EN60715.

Connection

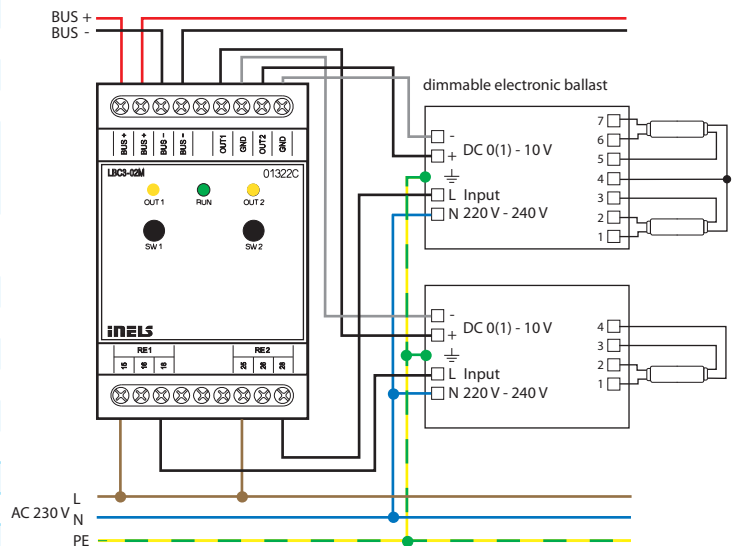

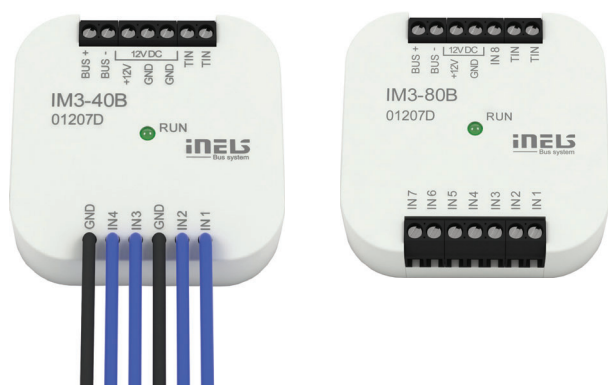

EAN code
 IM3-40B: 8595188132312
 IM3-80B: 8595188132329

Technical parameters	IM3-40B	IM3-80B
Inputs		
Input:	4x* IN1, IN2**	8x* IN1- IN5**
Max. frequency pulse reading:	20 Hz	
Temperature measuring:	yes, input for external thermo sensor TC/TZ	
Range/accuracy of thermomeasuring:	-20 to +120 °C/0.5 °C from the range	
Outputs		
Output voltage/current:	12 V DC/75 mA, for supplying EZS sensors	
Communication		
Installation BUS:	BUS	
Status indication unit:	green LED RUN	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 1 W	
Rated current:	20 mA (at 27 V DC), from BUS	
Rated current of unit for full load on output 12 V DC:	60 mA	100 mA
Connection		
Terminal:	0.5-1 mm ²	
Inputs:	6x conductors CY length 90 mm	x
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP30	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions:	49 x 49 x 13 mm	
Weight:	32 g	27 g


* NO or NC against GND(-)

** are balanced inputs


- Binary input units IM3-40B and IM3-80B are used for connection of 4 or 8 devices with potential-less contacts (switches, buttons, switches of other design, PIR detectors, fire and gas detectors, etc.).
- Part of the inputs can be used as a balanced for alarm detectors:
 - IM3-40B – inputs IN1, IN2
 - IM3-80B – inputs IN1 – IN5
- Contacts of external devices connected to the inputs of the unit can be NO or NC - input parameters are configured in the software iDM3.
- Within the internal ESS configured in the iDM3 software, inputs must be set to balance or double balance.
- The units generate a supply voltage of 12 V DC/75 mA for powering external intrusion detectors, so they can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption of units from BUS (see technical data).
- The units can be used for counting pulses of energy meters with pulse output.
- The units are equipped with a temperature input for connecting an external two-wire temperature sensor TC/TZ (see accessories).
- IM3-40B, IM3-80B in case type B are designed for mounting into a installation box.

Connection

IM3-40B

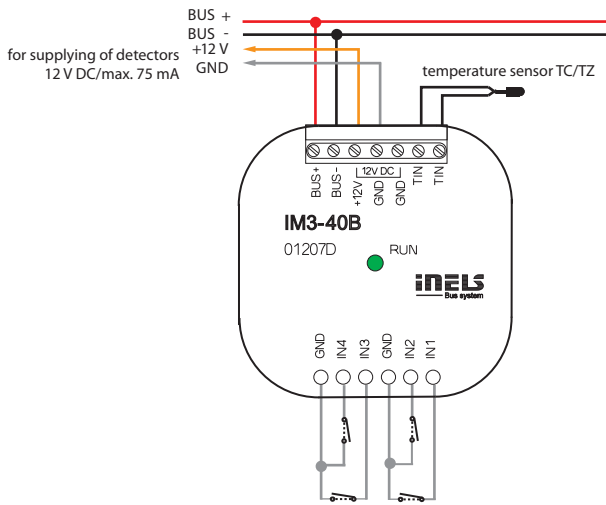


IM3-80B

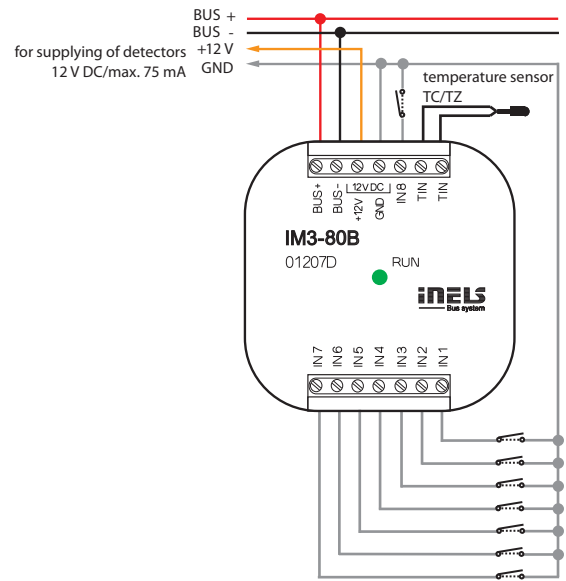


Balanced input

Simple:

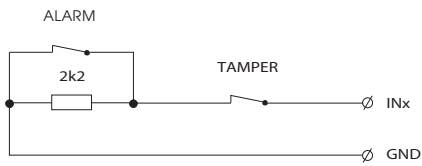

Double:

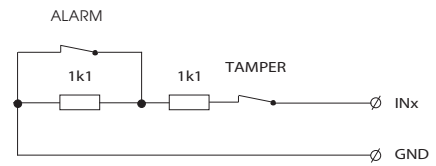



EAN code
TI3-40B: 8595188132695

Technical parameters

TI3-40B

Input

Temperature input for temperature measuring:	4x inputs for external thermo sensor*
Temperature measurement range:	by type of sensor, prob from -50°C to 400°C
Converter resolution:	15 bit

Communication

Installation BUS:	BUS
Status indication unit:	green LED RUN

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	20 mA (at 27 V DC), from BUS

Connection

Terminal:	0.5 mm ² - 1 mm ²
-----------	---

Operating conditions

Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP30
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into installation box

Dimensions and weight


Dimensions:	49 x 49 x 13 mm
Weight:	27 g

*TC, TZ, Ni1000, Pt1000, Pt100, see accessories

Connection options


2-wire

- it is necessary to connect terminals TIN_B and COM



3-wire


- connection of the sensor needs to be done according to the technical specifications




- The unit is designed for connection of up to four (TI3-40B) external temperature sensors.
- Units range TI3 support the connection of the following temperature sensors:
 - TC/TZ - 2-wire connections
 - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections
- Used in when necessary to take temperatures from different places (for example large floor heating – diagonal layout of sensors, floor/space, indoor/outdoor temperature, technological device – boiler, solar heating etc.)
- Status of units indicated by green RUN LED on the front panel:
 - if the supply voltage is connected (units are powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
 - if the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- TI3-40B in version B is designed for mounting into an installation box.

Connection

TI3-40B

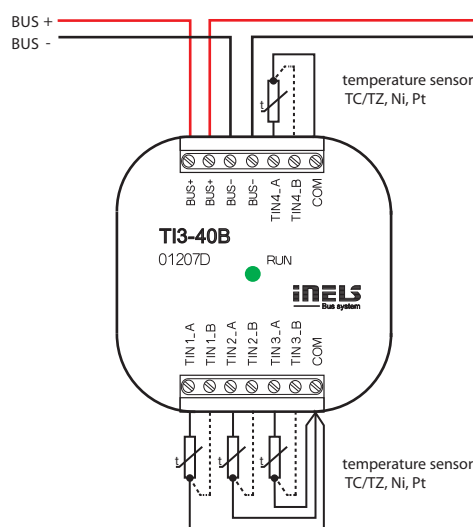

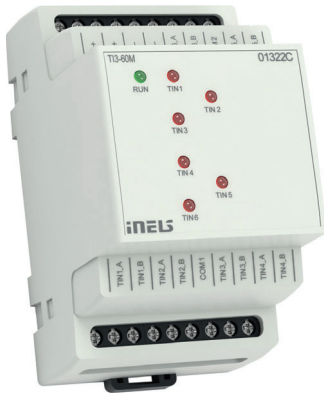

EAN code
TI3-60M: 8595188132893



Technical parameters **TI3-60M**

Inputs	
Temperature input for temperature measuring:	6x input for external temperature sensor TC, TZ, Ni1000, Pt1000, Pt100 see accessories
Temperature measurement range:	by type of sensor, probe from -50°C to 400°C
Converter resolution:	15 bit
Indication of exceeding the range or interruption of the sensor:	6x red LED
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	45 mA (at 27 V DC), from BUS
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into a switchboard rail to DIN EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	111 g

Connection options


2-wire
- it is necessary to connect terminals TIN_B and COM

3-wire
- connection of the sensor needs to be done according to the technical specifications



- Unit TI3-60M is designed to connect up to six external temperature sensors.
- Units range TI3 support the connection of the following temperature sensors:
 - TC/TZ - 2-wire connections
 - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections
- It is used in cases where it is necessary to read the temperature, eg floor/room, indoor/outdoor temperature, process equipment - boiler, solar heating, etc.
- Unit status is indicated by green RUN LED on the front panel:
 - if the supply voltage is connected (the unit is powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
 - if the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- The status on individual temperature inputs is indicated by the relevant red LED on the front panel:
 - LIT - temperature sensor disconnection
 - FLASHES - exceeding of the temperature range
 - UNLIT - ok
- TI3-60M in 3-MODULE is designed for switchboard mounting on DIN rail EN60715.

Connection

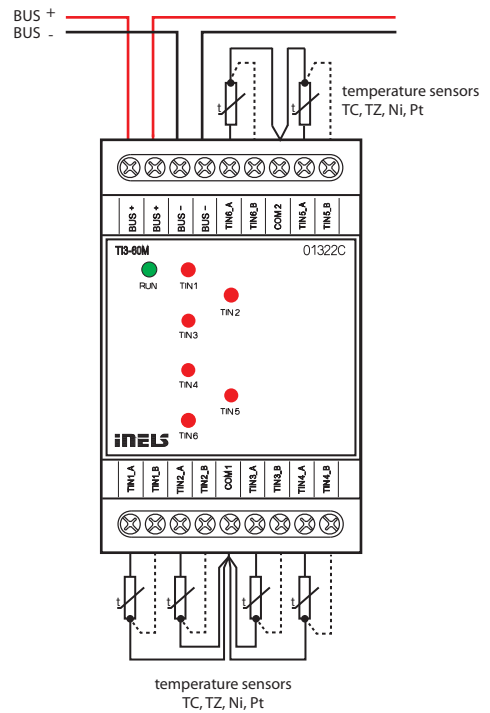



EAN code
IM3-140M: 8595188132459

Technical parameters **IM3-140M**

Inputs

Input:	14x NO or NC against GND (-) IN1 - IN7 - are balanced inputs
Max. frequency pulse reading:	20 Hz

Outputs

Output (power supply 12 V for sensors):	12 V DC/150 mA
---	----------------

Communication

Installation BUS:	BUS
Data transfer indication:	green LED

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	25 mA (at 27 V DC), from BUS
Rated current for full load on output 12 V DC:	100 mA

Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
-----------	---

Operating conditions


Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into a switchboard rail to DIN EN 60715
Design:	3-MODULE

Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	104 g


- Binary input unit IM3-140M is designed to connect up to 14 devices with potentialless contact (such as switches, buttons of other designs, fire and glass detectors and others).
- Inputs IN1 - IN7 can be balanced.
- Contacts of external devices connected to the inputs of the drive can be NO or NC - Input parameters are configured in the software iDM3.
- Inputs must be configured as balanced or double balanced - in an internal Electronic security system configured in iDM3 software.
- The unit generates a supply voltage of 12 V DC/150 mA for powering external detectors, so it can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption units from BUS (see technical data).
- The unit can be used for counting pulses of energy meters with pulse output.
- IM3-140M in 3-MODULE is designed for switchboard mounting on DIN rail EN60715.

Connection

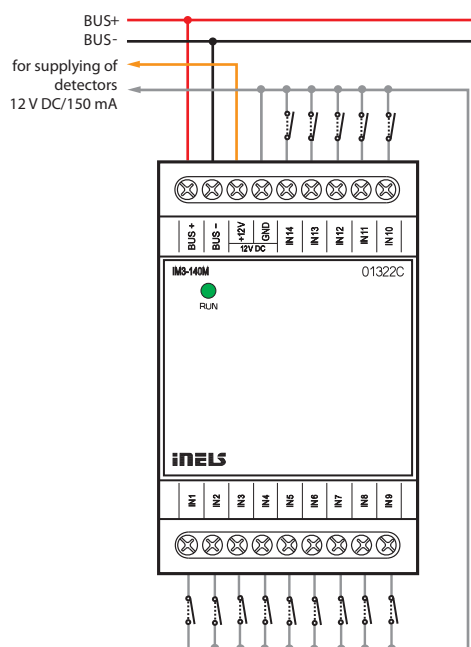



Balanced input

Simple:

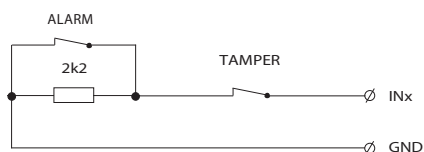

Double:

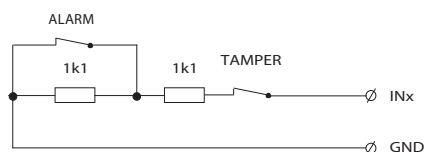

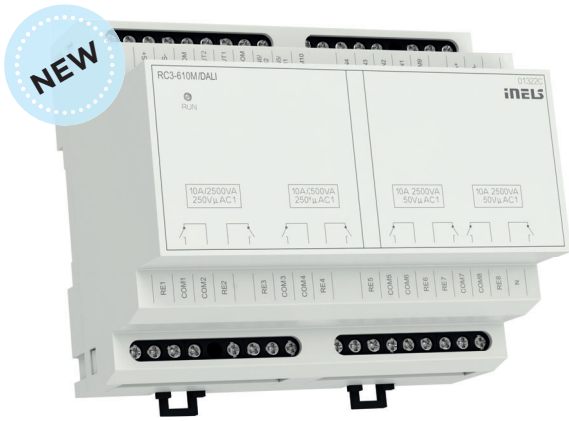

EAN code
RC3-610M/DALI: 8595188184663

Technical parameters		RC3-610M/DALI
Output		
Relay	8x NO/switch 10 A/AC1	
Switched voltage:	250VAC , 30VDC	
Switched power:	2500 VA/AC1, 150 W/DC	
Peak current:	10A AC1 , 5A DC	
Relay outputs separated from all internal circuits:	reinforced insulation (Overvoltage cat. II according to EN 60664-1)	
Isolation between COM1,2 a COM3,4 a COM5,6,7,8 *	basic insulation (cat. overvoltage II according to EN 60664-1) max. 400AC	
Isolation voltage of the open relay contact:	1 kV	
Max. current through one common terminal:	16 A	
Minimum switching current:	100 mA/10 V DC	
Mechanical service life:	10 000 000	
Electrical life AC1:	100 000	
Analog		
Analog outputs:	AO1, AO2	
Voltage analogue. output/ max. current:	2x 0(1) - 10 V/10 mA	
Inputs		
Input DIN:	6x DIN (digital input) or 4x DIN + 2x TIN (temperature input) **	
DIN sampling rate:	20 Hz	
DIN common wire:	COM9, COM10	
TIN common wire:	TINCOM	
Communication		
DALI		
Output interface:	DALI	
DALI addresses (max.):	16	
Internal DALI source:	yes, max. 64 mA	
BUS		
Installation bus:	BUS	
Indication of unit status:	Green LED RUN	
Power		
Internal DALI supply terminals:	terminals COM8 and N	
Internal DALI supply voltage:	100-240V 50/60Hz max.0.1A	
Power dissipation:	3 W	
Connection		
Terminal plate:	max. 2.5 mm ² /1.5 mm ² with core	

* adjacent COM terminals (COM1 and 2, COM3 and 4, COM5 and 6, COM7 and 8) must be at the same potential


** input function is set during configuration

*** ACOM and COM9 terminals are at BUS potential


- The RC3-610M/DALI is an I/O actuator equipped with 6 binary inputs, of which 2 can be configured as temperature inputs and 8 independent relays with switching potential-free and potential contacts. It also includes two analog outputs 0(1)-10 V with a load capacity of up to 10 mA.
- Binary inputs RC3-610M/DALI are used for connecting up to 6 devices with a non-decimal contact (such as switches, switches, buttons of other designu, EZS and EPS detectors and others).
- Temperature inputs support the connection of TC/TZ temperature sensors in a 2-wire connection for temprature sensing needs.
- The actuator is designed for switching up to eight different appliances and loads by relay output (potential-free contact).
- The maximum load capacity of the relay contacts is 10 A/2500 VA/ AC1. Each of the output contacts is individually controllable. Relays are divided into four pairs, where each pair switches on its common potential.
- The DALI system BUS allows control of up to 16 independent DALI (Digital Addressable Lighting Interface) ballast addresses for fluorescent, LED and other luminaires.
- Analog outputs are considered for use with thermoregulation heads, air-conditioning ventilation flaps, various other dimmers or other devices with an analog control voltage of 0-10 V or 1-10 V.
- The parameters of all configurable inputs and outputs are set in the iNELS Designer & Manager configuration software environment, which is designed for Windows 7, 8 and 10 operating systems.
- RC3-610M/DALI in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Operating conditions	
Working temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the control cabinet for DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	310 g

Connection

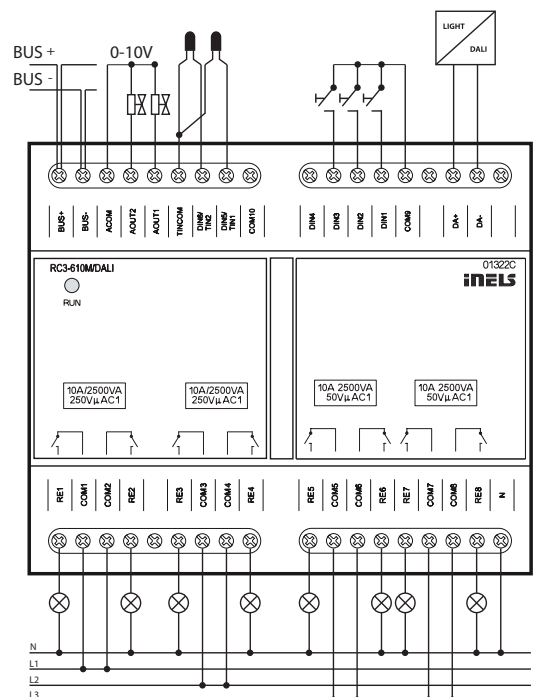

COMING SOON

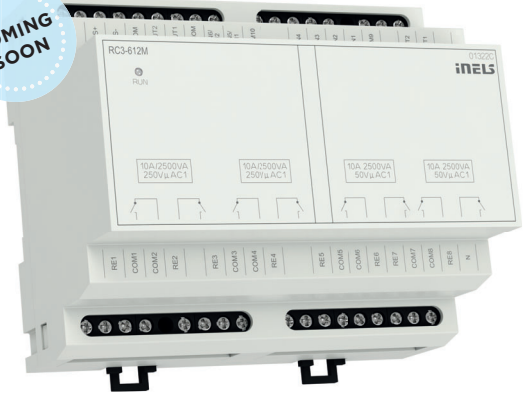

EAN code
RC3-610M/DALI: 8595188184663


- The RC3-612M is an I/O actuator equipped with 6 binary inputs, of which 2 can be configured as temperature inputs and 8 independent relays with switching potential-free and potential contacts. It also includes two analog outputs 0(1)-10 V with a load capacity of up to 10 mA.
- Binary inputs RC3-612M are used for connecting up to 6 devices with a non-decimal contact (such as switches, switches, buttons of other designu, EZS and EPS detectors and others).
- Temperature inputs support the connection of TC/TZ temperature sensors in a 2-wire connection for temprature sensing needs.
- The actuator is designed for switching up to eight different appliances and loads by relay output (potential-free contact).
- The maximum load capacity of the relay contacts is 10 A/2500 VA/ AC1. Each of the output contacts is individually controllable. Relays are divided into four pairs, where each pair switches on its common potential.
- The two-channel phase dimmer allows dimming of resistive, capacitive and inductive loads up to 150VA per channel. The nature of the load is set in the output parameters when configuring the unit in software IDM.
- Analog outputs are considered for use with thermoregulation heads, air-conditioning ventilation flaps, various other dimmers or other devices with an analog control voltage of 0-10 V or 1-10 V.
- The parameters of all configurable inputs and outputs are set in the iNELS Designer & Manager configuration software environment, which is designed for Windows 7, 8 and 10 operating systems.
- RC3-612M in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Technical parameters RC3-612M


Output	
Relay	8x NO/switch 10 A/AC1
Switched voltage:	250VAC , 30VDC
Switched power:	2500 VA/AC1, 150 W/DC
Peak current:	10A AC1 , 5A DC
Relay outputs separated from of all internal circuits:	reinforced insulation (Overvoltage cat. II according to EN 60664-1)
Isolation between COM1,2 a COM3,4 a COM5,6,7,8 *	basic insulation (cat. overvoltage II according to EN 60664-1) max. 400AC
Isolation voltage of the open relay contact:	1 kV
Max. current through one common terminal:	16 A
Minimum switching current:	100 mA/10 V DC
Mechanical service life:	10 000 000
Electrical life AC1:	100 000
Analog	
Analog outputs:	AO1, AO2
Voltage analogue. output/ max. current:	2x 0(1) - 10 V/10 mA
Dimmer	
Output:	2x contactless outputs, 2x MOSFET
Type of load:	resistive, inductive, capacitive, LED, ESL **
Minimum output power:	10 VA
Maximum output power:	150 VA for each channel
Device protections:	thermal/short-term overload/ long-term overload
Inputs	
Input DIN:	6x DIN (digital input) or 4x DIN + 2x TIN (temperature input) **
DIN sampling rate:	20 Hz
DIN common wire:	COM9, COM10
TIN common wire:	TINCOM
Communication	
BUS:	
Installation bus:	BUS
Unit status indication:	green LED RUN
Power	
Supply voltage BUS/ tolerance/rated current:	27 V DC, -20/+10 %, 110 mA
Power dissipation:	3 W
Connection	
Terminal plate:	max. 2.5 mm ² /1.5 mm ² with core

Operating conditions	
Working temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the control cabinet for DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	360 g

Connection

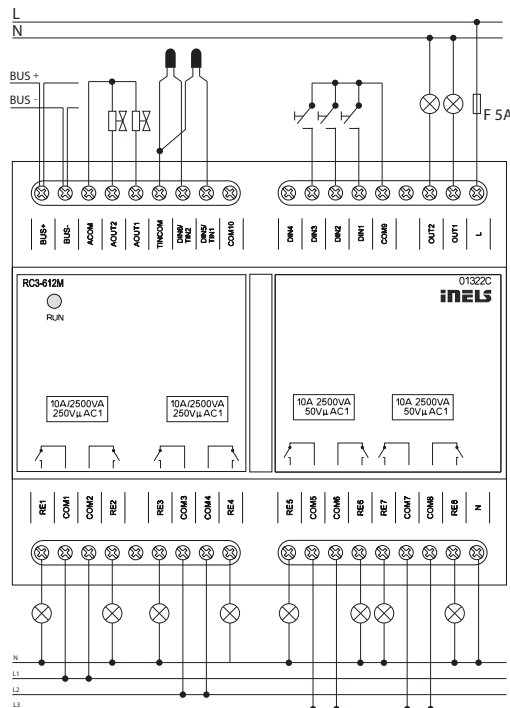

* adjacent COM terminals (COM1 and 2, COM3 and 4, COM5 and 6, COM7 and 8) must be at the same potential
 ** input function is set during configuration
 *** ACOM and COM9 terminals are at BUS potential

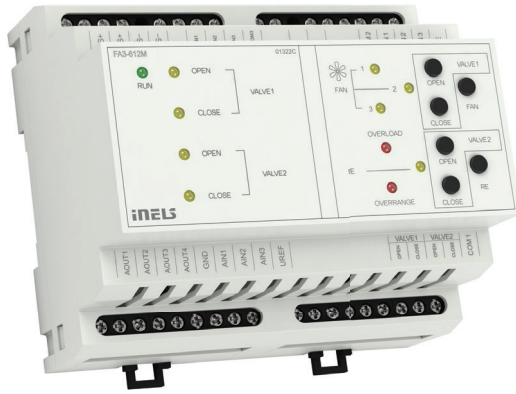

EAN code
FA3-612M: 8595188135276

Technical parameters **FA3-612M**

Input

Analog inputs:	3x voltage, current or temperature input
Number of inputs:	3
Galv. separation from inner circuits:	no
Diagnostic:	indication red LED OVERRANGE (exceeding the range, interruption of a sensor or overload of Uref output)
Common terminal:	GND
Converter resolution:	14 bits
Input resistance	
- for voltage ranges:	approx. 150 kΩ
- for current ranges:	100 Ω
Types of inputs/measuring ranges*:	Voltage (U): 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) Current (I): 0 ÷ +20 mA (I) ; 4 ÷ +20 mA (I) temperature: input at ext. temperature sensor TC, TZ, Ni1000**, Pt1000**, Pt100** see accessories/ according to used sensor from -30 °C to 250 °C

Digital inputs:	3x switching or expansion, positive logic (SINK)
Input voltage:	20 - 240 V AC (50 - 60 Hz)/DC
Galv. separation from internal circuits:	yes
Common lead:	GO COM3

Outputs	
Analog:	4x (A_OUT1 - A_OUT4)
Voltage analog. output/max. Current:	4x 0(1) - 10 V/10 mA
Uref reference voltage outputs	
Voltage/Current Uref:	10 V DC/100 mA
Output overload indication:	red LED OVERLOAD
SSR (Electronic Relay):	4x (VALVE1 - VALVE2)
Switching voltage:	20 - 240 V AC
Switching capacity:	480 VA
Peak current:	20 A, t ≤ 16 ms
Output indication:	yellow LED
Relay 6A:	4x (FAN1-FAN3, RE)
Switching voltage:	250 V AC, 24 V DC
Switching capacity:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3
Relay outputs separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Minimum switching load:	500 mW (12 V/10 mA)
Mechanical life:	10x10 ⁶
Electrical life AC1:	6x10 ⁴
Output indication:	yellow LED

Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN

Power supply	
Supply voltage/tolerance/ rated current:	27 V DC, -20/+10 %, 5 mA
Supply voltage of power section (relay) tolerance/ nominal current:	AC 230 V (50 Hz), -15/+10 %, 20 mA
Dissipated power:	max. 1 W

- FA3-612M is a unit (actuator) designed to control fan coil units using analogue/digital inputs and analog/relay outputs.
- Analog inputs for temperature, voltage or current measurement (Uref reference voltage can also be used).
- The digital inputs are galvanically isolated with positive logic (Sink) in the 24-230 V AC/DC voltage range.
- Analog outputs 0-10 V.
- Connection to the installation BUS.
- Buttons for closing/opening the valve, fan and heating relay.
- The LEDs on the front panel indicate FAN, RE, VALVE1, VALVE2, OVER-RANGE, and OVERLOAD status.
- FA3-612M in 6-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.


Connection

Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE


Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	307 g

Connection

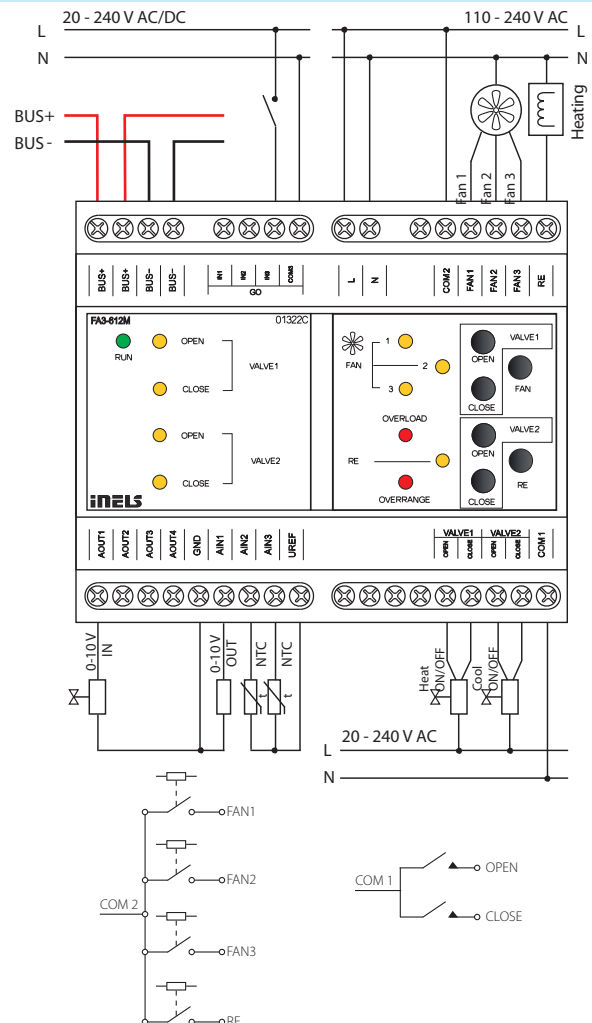

* selectable for each input individually by configuration in the user program iDM3.
** The FA3-612M / Pt version is available for these sensors.

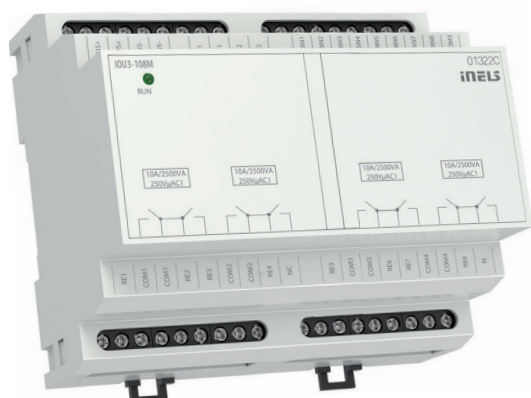


EAN code
IOU3-108M: 8595188181884


Technical parameters	IOU3-108M
Outputs	
Output:	8x switching 8 A/AC1
Switched voltage:	250 V AC1, 150 W/DC
Switched output:	2500 VA/AC1, 150 W/DC
Peak current:	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM1, COM2 and COM3:	basic insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Max. current of one common terminal:	16 A
Minimal switched current:	100 mA/10 V DC
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	15 min ⁻¹
Mechanical life:	10 000 000
Electrical life AC1:	100 000
Mains voltage detection:	yes - (relay switched to neutral)
Inputs	
Input:	8x NO or NC against GND (-)
Max. frequency pulse reading:	20 Hz
Temperature input for temperature measuring:	2x input for external thermo sensor TC, TZ (NTC 12k)
Temperature measurement range:	by type of sensor, prob from -40 °C až 125 °C
Converter resolution:	15 bit
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Voltage of BUS/tolerance/nominal current:	27 V DC, -20/+10 %, 110 mA
Dissipated power:	3 W
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	310 g

- IOU3-108M is combined actuator equipped with 8 binary inputs, 2 temperature inputs and 8 independent relays with switching potential-free contacts.
- Binary inputs IOU3-108M are used to connect up to 8 devices with a potential-free contact (such as switches, buttons, burglar alarm and fire detectors or others).
- The unit can be used to read pulses from energy meters with a pulse output.
- The temperature inputs support the connection of the following temperature sensors: TC / TZ - 2-wire connection.
- They are used in cases where it is necessary to measure the temperature, eg floor/space, indoor/outdoor temperature, technological equipment - boiler rooms, solar heating, etc.
- The maximum load capacity of the contacts is 10 A / 2500 VA / AC1.
- Each of the output is individually controllable and addressable.
- The relays are divided into four pairs, where each pair switches its common potential.
- The actuator is designed for switching up to eight different appliances and loads via a relay output (potential-free contact).
- IOU3-108M in 6-MODULE design is designed for mounting in a switch-board on DIN rail EN60715.

Connection

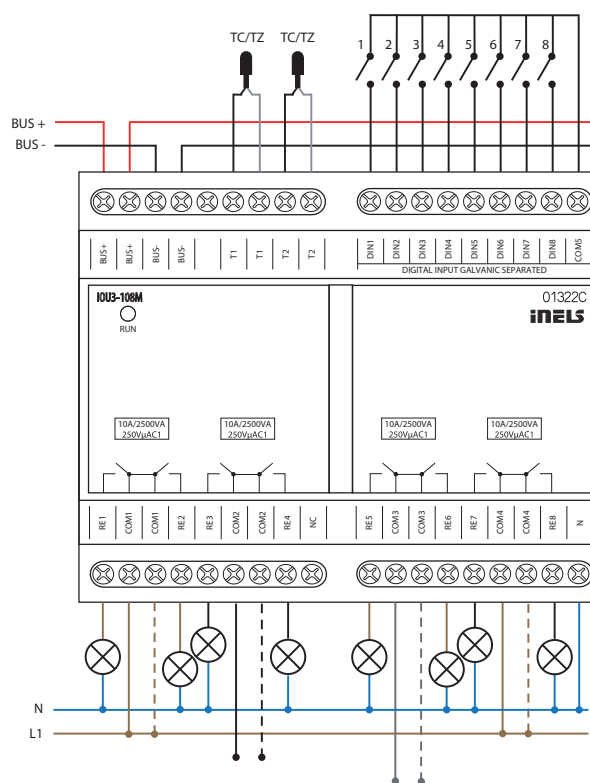

Diagram

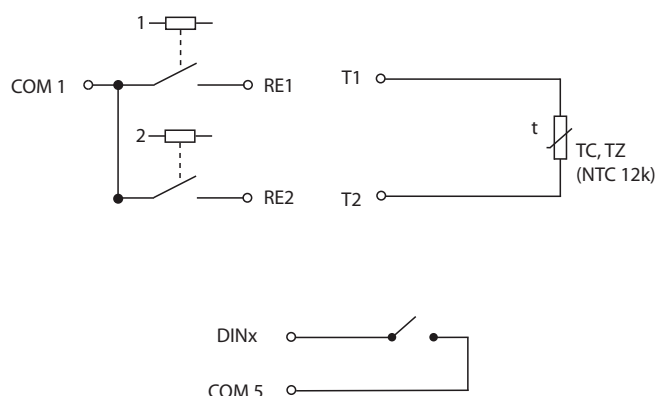



EAN code
EST3_white/white 8595188177009


Technical parameters		EST3
Display		
Type:	colored TFT LCD	
Aspect ratio:	3:4	
Visible area:	52.5 x 70 mm	
Backlight:	active	
Touchpad:	4-wire resistive	
Display:	3.5"	
Number of points:	240 x 320	
Color Depth:	16.7M (24 bit color)	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 2 W	
Rated current:	150 mA (at 27 V DC)	
Connection		
Connection:	terminals	
Connecting conductors profile:	max. 2.5 mm ² /1.5 mm ² with sleeve	
Operating conditions		
Operating temperature:	0 to +55 °C	
Storing temperature:	- 20 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	installation box	
Dimensions and weight		
Dimensions:	94 x 94 x 36 mm	
Weight:	120 g	

* Ordering codes of all colours are available in the iNELS price list.

** Weight is listed with plastic frame.

- The control unit with touch screen EST3 is a suitable control element of the iNELS system in places where it is necessary to control multiple devices. The unit replaces several drivers and enables minimizing the number of switches on the wall.
- EST3 features a 3.5 "color touchscreen with an aspect ratio of 3:4. The basic display resolution is 240x320 pixels. The color depth of 16.7 million colors (24 bit color, True Color).
- Use the touch sensing surface to control configured buttons and symbols on the screen just by a light touch of a finger. Individual symbols on the screen are in the "Press" animated by the associated output in the system.
- EST3 has these screens (the displayed screens can be set in iDM3):
 - buttons screen
 - temperature control screen
 - control RGB/RGBY/RGBW light sources screen
- Selecting the default screen is possible from the iDM3 software.
- For screen of buttons one of four different matrixes buttons can be used - 2x2, 2x3, 3x3 and 3x4. Matrix selection can be done from the iDM3 software. On the screen can then be used up to 12 buttons to control appliances or scenes.
- In the menu settings, directly on the EST3 component one of 48 prepared symbols (for control of lighting, shading, scenes and other technologies) can be assigned to each button or the buttons can be used to enter text (number of characters depends on the matrix of buttons and therefore the size of the buttons).
- The temperature regulation screen enables coordination of the temperature of the selected heating circuit in a range of ± 3 , ± 4 or ± 5 °C (in relation to settings in iDM3).
- The virtual wheel can be used for temperature correction, where you can drag your finger across the screen to control the temperature by half a degree Celsius.
- The temperature correction can also be used instead of the virtual wheel symbols "+" and "-".
- EST3 units do not have an integrated temperature sensor, or terminals for connection to an external temperature sensor. Within the iDM3 software, it is possible to assign any unit of heat input system iNELS.
- The control RGB/RGBY/RGBW light sources screen allows you to comfortably control your RGB/RGBY/RGBW light sources and adjust the luminous atmosphere as needed.
- For these RGB/RGBY/RGBW light sources, it is possible to use the controls on the screen to adjust the color and brightness. It is also possible to directly set the RGB/RGBY/RGBW illumination light source into white color.
- Located in the left upper corner of the screen are 4 indicators that can signal the status of any logical input/output in the iNELS system.
- In iDM3 it is possible to define the displayed screen, the default screen, matrix of buttons, type RGB/RGBY/RGBW and a correction range for the temperature control.
- In the settings menu directly on the device EST3 it is possible to select the menu language, screen saver, sleep mode, brightness adjustment and symbols and texts for each button.
- EST3 are designed as LOGUS⁹⁰ devices (EST3 however cannot be placed into multi-frames with other devices in this design) and are intended for mounting to installation box.

Connection

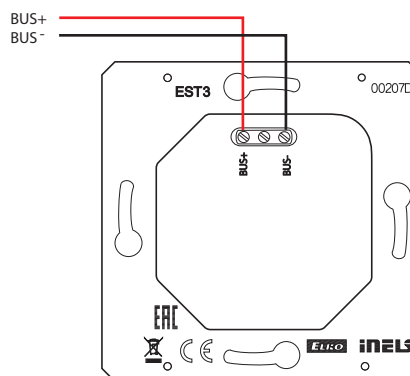


Screenshots




RGB lamp and light source control screen

- The RGB light sources control screen contains controls for managing the desired color and brightness of the RGB light sources.
- RGB control screen function is set up so that the colors R, G, B are bound together and simulate the signal level on analog inputs R, G, B and the resulting brightness of the lamp is linked to a simulated analog input 0 to 100%.
- The RGB control display is comprised of several elements and buttons.
 - a long press (touch) on the ON/OFF controls the central setting of RGB components and lamp brightness - on/off.
 - buttons in the upper half of the screen are for setting the lamp brightness from 0-100% in 5% increments (see adjustable brightness indicator in %).
 - buttons in the lower half of the screen are for setting the color comfort and accelerated lamp RGB control. The buttons have a lock function. When pressing "white illumination" button, the analog inputs are automatically set to the maximum value of individual color components, which appears as a resulting white light at the RGB light source output when these components are mixed. Then simply adjust the brightness intensity at the output. When pressing (touching) the button "RGB-based color illumination", the "white illumination" button automatically unlocks, and the "RGB-based color illumination" settings button locks. Now the values of analog inputs of individual RGB color components are preset according to the set cursor in the color wheel of the RGB scale on the EST3.

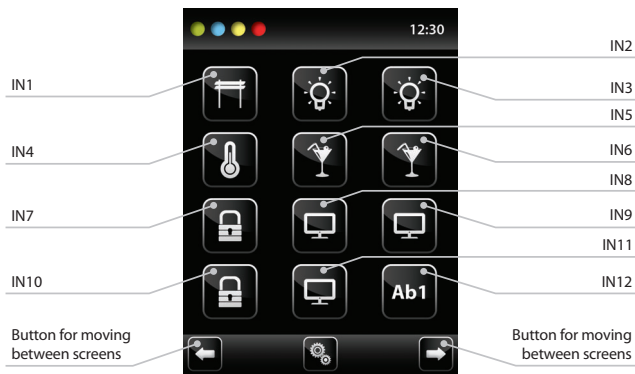

Heating control screen

- On the temperature control screen, the temperature of the selected heating circuit can be corrected in the range of $\pm 3, \pm 4$ or ± 5 °C.
- The virtual wheel can be used for temperature correction, where you can drag your finger across the screen to control the temperature by half a degree Celsius.
- The temperature correction can also be used instead of the virtual wheel symbols "+" and "-" .



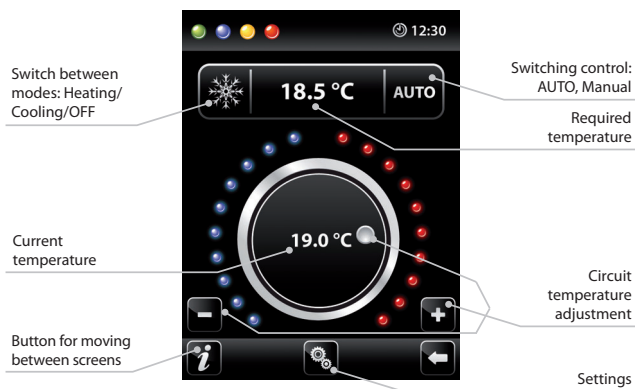


Buttons screen

- Programming iNELS system functions on each button on the screen units EST3 is the same as programming other digital inputs or events for input or button units.
- Buttons can be configured as well as other inputs in the system, both for short and also long press (> 1.5 s).
- Buttons (icons) on the screen can be used instead of control outputs for visualization of one of the digital outputs of the system iNELS. This is made possible by assigning button to the desired output.
- In doing so, the button (icons) on the screen EST3 will become signal lamps (illuminated button), showing the state of the associated output.

Additional information

- Info gives information on the device and firmware version.
- Clicking the icon brings you to the settings menu, used to edit the EST3.
- The icon returns to the buttons panel.
- The system time is displayed in the upper right corner of the screen.
- All inputs and outputs on the EST3 unit can be freely programmed and parameterized using the iDM3 program.






EAN code

GSB3-40/B: 8595188132909
 GSB3-60/B: 8595188132916
 GSB3-80/B: 8595188132923



Technical parameters	GSB3-40	GSB3-60	GSB3-80
Inputs			
Temperature measuring:	YES, built-in thermo sensor		
Scope and accuracy of temp. measuring:	0 to +55 °C; 0.3 °C from the range		
Number of control buttons:	4	6	8
Inputs:	2x AIN/DIN		
Resolution:	according to the settings, 10 bits		
Ext. temperature sensor:	yes, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of ext. sensor:	TC/TZ		
Temperature measurement range:	-20 °C to +120 °C		
Temperature measurement accuracy:	0.5 °C from range		
Outputs			
Indications:	pair of LEDs (red, green)		
Number of LED:	2	3	4
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25 - 40 mA (at 27 V DC), from BUS		
Connection			
Terminals:	0.5 - 1 mm ²		
Operating conditions			
Relative humidity:	max. 80 %		
Operating temperature:	-20 to +55 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP20		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions:	94 x 94 x 36 mm		
Weight:	155 g		


- The wall controller with touch control series GSB3 is a design element (controller) in the system iNELS3 with elegant design and comfortable controlling. Controllers are available in black (e.g. GSB3-40/B) and white (e.g. GSB3-40/W) variants.
- Between each pair of touch buttons there is available a pair of indicator LEDs (green, red) to signal not only the status of the controlled appliances, but also the status of any sensor or actuator in the system.
- At the location of each touch button there is available a blue diode signaling the touching of the given button. Touching may be signaled by a vibration impulse or sound tone - selectable in the software iDM3.
- Controllers are 4-channels (GSB3-40), 6-channels (GSB3-60) and 8-channels (GSB3-80).
- All versions are in the same dimension as a basic modular wall-switch (94x94 mm).
- Each controller is equipped with a thermo sensor. It is equipped with two analog-digital inputs (AIN/DIN), and it is possible to connect two potentialless contact or an external temperature sensor TC/TZ. (for example on floor temperature measurement).
- Controllers are equipped with an ambient light intensity sensor. From the basic information from the sensor, it is possible to illuminate orientation blue diodes in the touch controls GSB3 or perform various actions in the software iDM3, e.g. illuminate light circuits in a hallway, etc.
- Advantages over conventional switches/buttons include space saving, signaling of any output system, the ability to measure temperature and also the ability to connect external buttons or detectors.
- Each channel (button) can control any actuator (appliance) in the system. It is also possible to program various functions or macro (set of functions) to each button. This allows you to control several appliances with one button simultaneously.
- Each button (channel) can have different functional modes beside lighting control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF
 - b) Button controller (impulse relay):
 - first press ON, second press OFF.
 - c) Dimmer:
 - short press – ON/OFF
 - d) Time switch:
 - ON after press, automatically OFF after set time.
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity
- Design series LOGUS⁹⁰ offers glass frames in black and white color. These frames goes perfectly with GSB3 wall buttons.



EAN code
 GSB3-40/W: 8595188132954
 GSB3-60/W: 8595188132985
 GSB3-80/W: 8595188132992

Connection

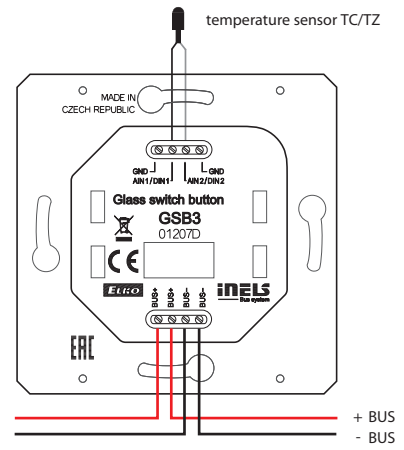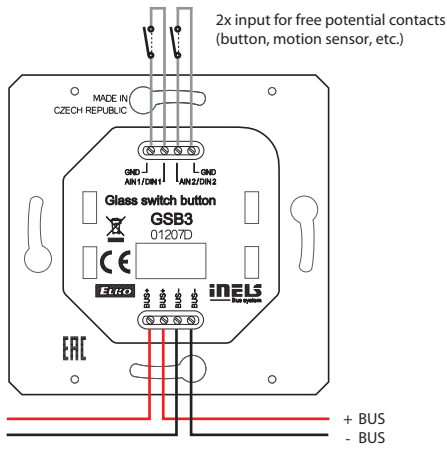




EAN code
WSB3-20: 8595188132343
WSB3-20H: 8595188132473


Technical parameters	WSB3-20	WSB3-20H
Inputs		
Temperature measuring:	yes, built-in temperature sensor	
Scope and accuracy of temp. measuring:	0 to +55 °C ; 0.3 °C from the range	
Number of control buttons:	2	
Humidity measurement:	NO	YES
Humidity measurement range:	-	0 to 99 % Relative humidity
Humidity measurement accuracy:	-	± 3 % Relative humidity
Inputs:	2x AIN/DIN	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of ext. sensor:	TC/TZ	
Temperature measurement range:	-20 °C to +120 °C	
Temp. measurement accuracy:	0.5 °C from range	
Outputs		
Indication:	two-colored LED (red, green)	
Number of LEDs:	1	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25 mA (at 27 V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm ²	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions		
- plastic:	85.6 x 85.6 x 42 mm	
- metal, glass, wood, granite:	94 x 94 x 36 mm	
Weight:	55 g (without frame)	

- Wall controllers with low-upstroke control WSB3-20 and WSB3-20H are the main and most frequently used units (controller) in the iNELS system.
- Built-in micro-buttons with low upstroke offer elegant and easy controlling.
- Wall switches WSB3-20 and WSB3-20H are available in 2-channels version.
- Double color (red/green) LED diode indicates either status of controlled appliances or status of any sensor or actuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS⁹⁰ (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external temperature sensor TC/TZ (e.g. for measuring floor temperature).
- Wall button WSB3-20H is comparable to the WSB3-20 but additionally equipped with a relative humidity meter, and for better access of air to the sensor can be used with 99621T including accessories 99622 (Vista MT) and 99,623 (Vista IRMT), instead of the housing cover 99601T.
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity/complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside lighting control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF
 - b) Button controller (impulse relay):
 - first press ON, second press OFF
 - c) Dimmer:
 - short press – ON/OFF
 - d) Time switch:
 - ON after press, automatically OFF after set time
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity
- WSB3 in LOGUS⁹⁰ design is designed for mounting into an installation box.

Connection

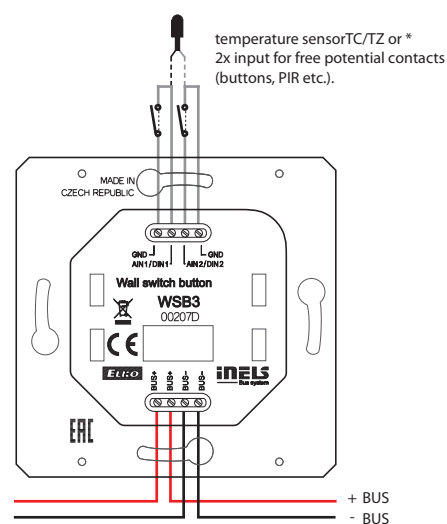

* The choice is made in iDM3 for each unit separately.




EAN code
 WSB3-40: 8595188132336
 WSB3-40H: 8595188133043


Technical parameters	WSB3-40	WSB3-40H
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measuring:	0 to +55 °C; 0.3 °C from the range	
Number of control buttons:	4	
Humidity measurement:	NO	YES
Humidity measurement range:	-	0 to 99 % Relative humidity
Humidity measurement accuracy:	-	± 3 % Relative humidity
Inputs:	2x AIN/DIN	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temp. measurement range:	-20 °C to +120 °C	
Temp. measurement accuracy:	0.5 °C from range	
Outputs		
Indication:	two-colored LED (red, green)	
Number of LEDs:	2	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25 mA (at 27 V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm ²	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions		
- plastic:	85.6 x 85.6 x 42 mm	
- metal, glass, wood, granite:	94 x 94 x 36 mm	
Weight:	55 g (without frame)	

* The choice is made in iDM3 for each unit separately.

- Wall mounted controllers with upstroke control WSB3-40 and WSB3-40H are the basic and most popular feature (control) of the iNELS system.
- Built-in micro-switch with low upstroke offers elegant and pleasant control.
- Controllers WSB3-40 and WSB3-40H are supplied with 4-channels.
- Two-coloured indication LEDs located in each controller, can signal the status of controlled appliances or the status of any sensor or actuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS⁹⁰ (85.6x85.6 or 94x94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external temperature sensor TC/TZ (e.g. for measuring floor temperature).
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity/complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside lighting control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF
 - b) Button controller (impulse relay):
 - first press ON, second press OFF
 - c) Dimmer:
 - short press – ON/OFF
 - d) Time switch:
 - ON after press, automatically OFF after set time
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity
- WSB3 in LOGUS⁹⁰ design is designed for mounting into an installation box.

Connection

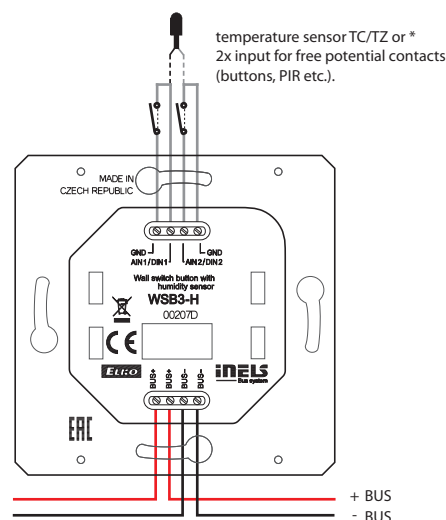



EAN code
WMR3-21: 8595188132756

Technical parameters WMR3-21

Inputs

Number of control buttons:	2
----------------------------	---

RFID readers

Supported frequencies:	13.56 MHz
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)

Outputs

Output:	1x changeover 8 A/AgSnO ₂
Indication:	two-color LED (red, green)
Acoustic output:	piezo-changer
Switching voltage:	230 V A/30 V DC
Switching output:	2000 VA/AC1; 240 W/DC
Peak current:	20 A/<3s
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950
Minimal switched current:	10 mA/10 V
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	15 min ⁻¹
Mechanical life:	1x 10 ⁷
Electrical life AC1:	1x 10 ⁵

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	50 mA (at 27 V DC), from BUS

Connection

Data:	terminals, 0,5 - 1 mm ²
Network:	max. 2.5 mm ² /1.5 mm ² with sleeve

Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into installation box


Dimensions and weight

Dimensions	
- plastic:	85.6 x 85.6 x 42 mm
- metal, glass, wood, granite:	94 x 94 x 36 mm
Weight:	68 g (without frame)

- WMR3-21 is a wall-mounted card reader that is designed to read contactless media (smart cards, key chains, etc.), which are used for controlling access to buildings or their parts.
- With the glass controller WMR3-21 users will appreciate the ease of control using two push buttons, which can be assigned different control functions: lighting, shading, scenes, heating, etc.
- WMR3-21 reader can be used to control the security system (locking/unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- WMR3-21 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types: MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- WMR3-21 is also equipped with 8 A relay output with changeover contact AgSnO₂, by which controlled devices can be switched directly (or any actuator in the system can be set in software iDM3).
- Indication two-color LED in the controller cover can indicate not only the status of controlled appliance, but also the status of any sensor or actuator in the system.
- Wall card reader WMR3-21 is compatible with both types of frames LOGUS⁹⁰ (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.

Connection

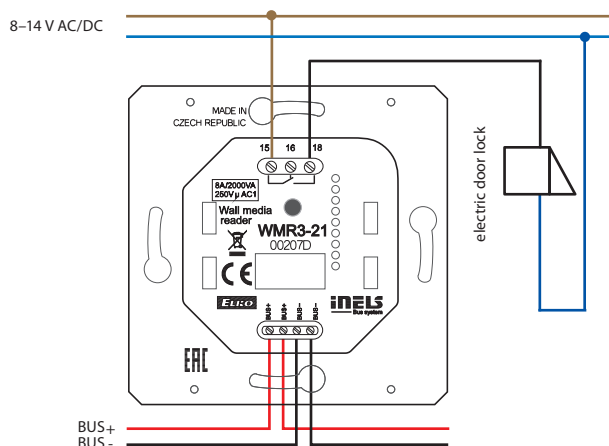

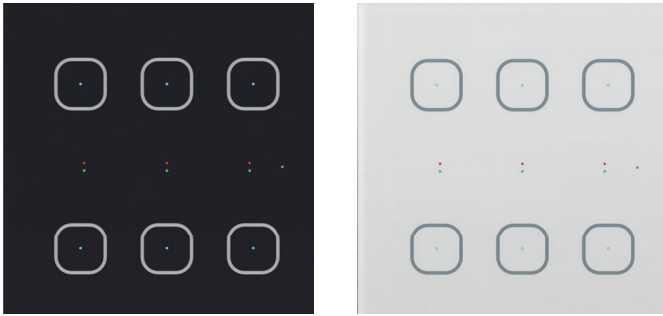

EAN code
 GMR3-61/B: 8595188155854
 GMR3-61/W: 8595188155793

Technical parameters **GMR3-61**

Inputs

Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measuring:	0 to +55°C ; 0.3°C from the range
Number of control buttons:	6

RFID readers

Supported frequencies:	13.56 MHz
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)

Outputs

Indication:	3 pairs of LED (red, green)
Output:	1x changeover 8 A/AgSnO ₂
Acoustic output:	piezo-changer
Switching voltage:	230 V AC/30 V DC
Switching output:	2000 VA/AC1; 240 W/DC
Peak current:	20 A/<3s
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950
Minimal switched current:	10 mA/10 V
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	15 min ⁻¹
Mechanical life:	1x 10 ⁷
Electrical life AC1:	1x 10 ⁵

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	50 mA (at 27 V DC), from BUS

Connection

Data:	terminals, 0.5 - 1 mm ²
Network:	max. 2.5 mm ² /1.5 mm ² with sleeve

Operating conditions


Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into installation box

Dimensions and weight

Dimensions:	94 x 94 x 36 mm
Weight:	155 g

- Wall RFID card reader GMR3-61 is designed for reading of contactless media (chip cards, key fobs, tags, etc.), which are used for controlling access to buildings or parts of buildings.
- With the glass controller GMR3-61 users will appreciate the elegant design and the easy of control using six touch buttons, which can be assigned different control functions lighting, shading, scenes, heating, etc.
- GMR3-61 a design element of the (control) system iNELS and is available in black (GMR3-61/B) and white (GMR3-61/W) variants.
- GMR3-61 reader can be used to control the security system (locking/unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- GMR3-61 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1) .
- The GMR3-61 is also equipped with 8 A relay output with changeover contact AgSnO₂, which can be switched directly by reader (or by any controller in the system).
- Between each pair of touch keys is a pair of indicator LEDs (Green, Red) to indicate the status of the controlled appliance, or the state of any sensor or actuator in the system.
- Located on each touch button is a blue LED indicator, signalling the touch of a button. Touching may also be signalled by a vibrating pulse or audible tone - optionally in the software iDM3.
- All variants of GMR3-61 are available in sizes of luxury controllers LOGUS⁹⁰ (94 x 94 mm).
- GMR3-61 reader is equipped with a sensor of ambient light intensity. Based on information from the sensor can switch the orientation of blue LEDs on the touch-pad GSB3 or perform various actions with the software iDM3, eg. To control the lighting circuits in the corridor and others.
- GMR3-61 cannot be installed into multiple frames they are designed for mounting into installation boxes.

Connection

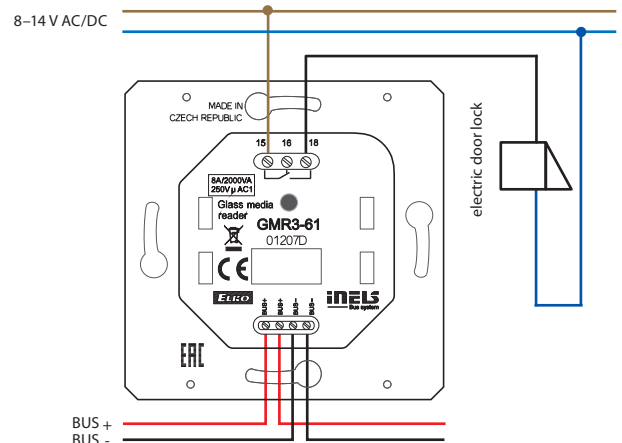



EAN code	
IDRT3-1 white:	8595188149488 (device, cover)
IDRT3-1 ivory:	8595188179614 (device, cover)
IDRT3-1 ice:	8595188179591 (device, cover)
IDRT3-1 pearl:	8595188179621 (device, cover)
IDRT3-1 aluminium:	8595188179584 (device, cover)
IDRT3-1 gray:	8595188179607 (device, cover)

Technical parameters

IDRT3-1

Inputs

Temperature measuring:	YES, built-in thermo sensor
Range/accuracy of temp. measuring:	0 to +55 °C; 0.3 °C from range
Heating/cooling circuit correction:	±3, ±4 or ±5 °C
Manual control of heating/cooling circuit:	2 x buttons
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from range

Communication

Installation:	BUS
Display:	symbol display
Backlight:	YES

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	20 mA (at 27 V DC), from BUS

Connection

Terminals:	0.5 - 1 mm ²
------------	-------------------------

Operating conditions


Operating temperature:	0 to +50 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	vertical, downward with BUS terminal
Installation:	into installation box

Dimensions and weight

Dimensions	
- plastic:	85.6 x 85.6 x 50 mm
- metal, glass, wood, granite:	94 x 94 x 50 mm
Weight:	76 g (without frame)

- IDRT3-1 is a digital wall temperature controller used to regulate the temperature in a room.
- Using the IDRT3-1, it is possible to correct the given heating/cooling circuit within a range of ±3, ±4 or ±5 °C (optional in SW iDM3).
- The temperature controller is equipped with an integrated heat sensor used to measure the room temperature. It is also equipped with two analog digital inputs (AIN/DIN), which can be used to connect two potential free contacts or a single external temperature sensor TC/TZ (e.g. for measuring the floor temperature).
- The display shows the current temperature and after pressing one of two buttons under the display, you can control the desired temperature.
- Readability improves after pressing one of the buttons to activate the backlight.
- Heating/cooling circuit is assigned with a thermo-regulator using iDM3.
- In the case of temperature correction within ±3, ±4 or ±5 °C, this change is valid until the next time mark within the time schedule established in iDM3.
- IDRT3 -1 in design LOGUS⁹⁰ is intended for mounting into an installation box.

Connection

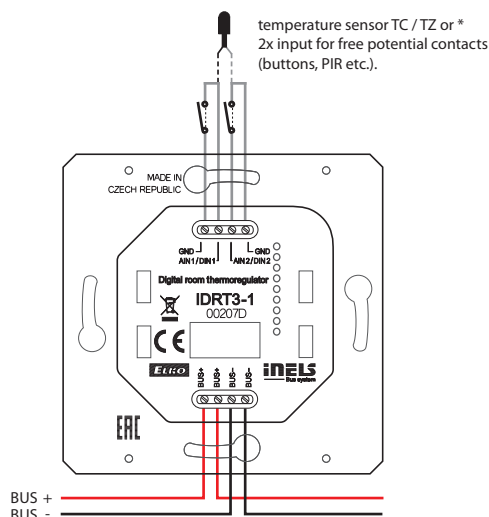

* The choice is made in iDM3 for each unit separately.




The picture of device is illustrative, the icons (symbols) are configurable by the customer.



EAN code
GCR3-11/B: 8595188157476
GCR3-11/W: 8595188157483

Technical parameters		GCR3-11
Input		
Illuminance sensor:	1 to 100 000 Lx	
Buttons		
Number of control buttons:	3	
Type:	capacitive	
Indication:	coloured illuminated symbol	
RFID readers		
Supported frequencies:	13.56 MHz	
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)	
Outputs		
Signalling:	Do Not Disturb, Make Up Room	
Output:	1x changeover 8 A/AgSnO ₂	
Acoustic output:	piezo-changer	
Tactile output:	vibration motor	
Switching voltage:	230 V AC/30 V DC	
Switching output:	2000 VA/AC1; 240 W/DC	
Peak current:	20 A/<3s	
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950	
Minimal switched current:	10 mA/10 V	
Switching frequency without load:	300 min ⁻¹	
Switching frequency with rated load:	10 min ⁻¹	
Mechanical life:	1x 10 ⁷	
Electrical life AC1:	1x 10 ⁵	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	100-130 mA (at 27 V DC), from BUS	
Connection		
Data:	terminals, 0.5 - 1 mm ²	
Network:	max. 2.5 mm ² /1.5 mm ² with sleeve	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions:	94 x 94 x 36 mm	
Weight:	161 g	

- Glass RFID card reader GCR3-11 is part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects, e.g. guest room management system (GRMS).
- GCR3-11 card reader is designed for reading smart cards, which are intended to enter the hotel room or any other part of the building.
- GCR3-11 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The GCR3-11 is a design component of the iNELS system and is available in elegant black (GCR3-11/B) and white (GCR3-11/W) variants.
- Input card reader is the first device of guest room management system (GRMS), with which the hotel guest comes into contact first and therefore was designed with an emphasis on representative design.
- Engraving of symbols is possible upon a request. The room number as well as the logo of the hotel can be also engraved on each component.
- The controller is also equipped with touch button with function of bell and with two icons to indicate the status of guest requests, e.g. "Do Not Disturb" and "Make Up Room", whose state guest can set from multi-function touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Reader GCR3-11 is equipped with an 8 A relay output with AgSnO₂ contact for door lock control.
- Reader GCR3-11 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- GCR3-11 are designed for mounting into an installation box.

Connection

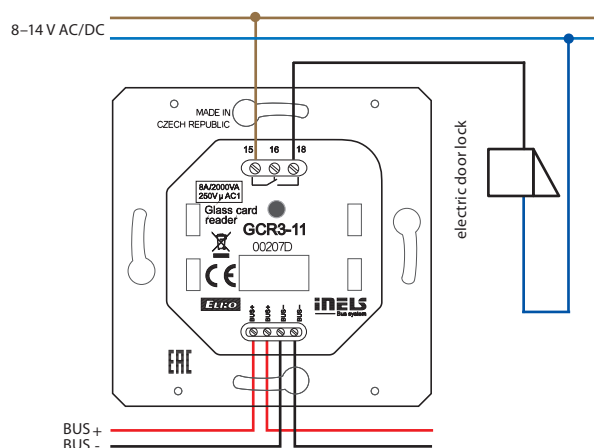



The picture of device is illustrative, the icons (symbols) are configurable by the customer.

EAN code
GDB3-10/B: 8595188157261
GDB3-10/W: 8595188157278

Technical parameters

GDB3-10

Inputs

Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measuring:	0 to +55 °C; 0.3 °C from the range
Inputs:	2x AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range
Illuminance sensor:	1 to 100 000 Lx

Buttons

Number of control buttons:	1
Type:	capacitive
Indication:	coloured illuminated symbol

Output

Signalling:	Do Not Disturb, Make Up Room
Acoustic output:	piezo-changer
Tactile output:	vibration motor

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	50 mA (at 27 V DC), from BUS

Connection

Terminals:	0.5 - 1 mm ²
------------	-------------------------

Operating conditions


Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	on the wall, observing the conditions for correct installation of the thermostat
Installation:	into installation box

Dimensions and weight

Dimensions:	94 x 94 x 36 mm
Weight:	154 g

- Glass info panel GDB3-10 is part of a comprehensive series of glass iNELS control units for guest room management system (GRMS), and is used to indicate the status of guest requests "Do Not Disturb" and "Make Up Room".
- Thanks to the capacitive touch button, the info panel can also be used for the function of the bell.
- Glass info panel is a design component of the iNELS system and is available in elegant black (GDB3-10/B) and white (GDB3-10/W) version.
- Engraving of symbols is possible to customize the device according to the client's requirements. The room number as well as the logo of the hotel can be also engraved on each component.
- The "Do Not Disturb" or "Make Up Room" statuses can be entered by the hotel guest from a multi-functional touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- All versions are in the size of the module (94 x 94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames of the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- Info panel GDB3-10 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GDB3-10 are designed for mounting into an installation box.


Connection

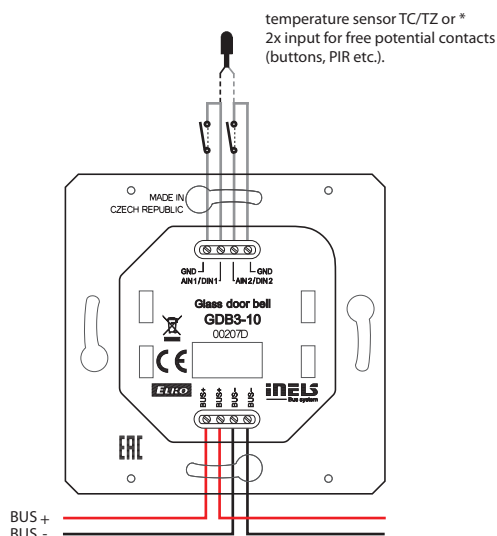

* The choice is made in iDM3 for each unit separately.



GCH3-31/B

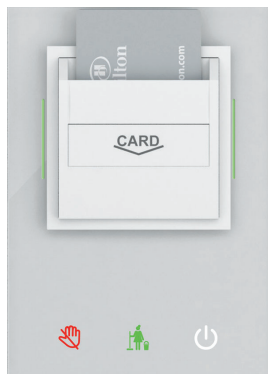

GCH3-31/W


EAN code
GCH3-31/B_white 8595188134996
GCH3-31/W_white 8595188134941

The picture of device is illustrative, the icons (symbols) are configurable by the customer.


Technical parameters	GCH3-31
Input	
Illuminance sensor:	1 to 100 000 Lx
Buttons	
Number of control buttons:	3
Typ:	capacitive
Indication:	coloured illuminated symbol
RFID readers	
Supported frequencies:	13.56 MHz
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs	
Signalling:	Do Not Disturb, Make Up Room
Output:	1x changeover 8 A/AgSnO ₂
Acoustic output:	piezo-changer
Tactile output:	vibration motor
Switching voltage:	230 V AC/30 V DC
Switching output:	2000 VA/AC1; 240 W/DC
Peak current:	20 A/<3s
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950
Minimal switched current:	10 mA/10 V
Switching frequency without load:	300 min ⁻¹
Switching frequency with rated load:	10 min ⁻¹
Mechanical life:	1x 10 ⁷
Electrical life AC1:	1x 10 ⁵
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	100-120 mA (at 27 V DC), from BUS
Connection	
Data:	terminals, 0.5 - 1 mm ²
Network:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into installation box
Dimensions and weight	
Dimensions:	142 x 94 x 36 mm
Weight:	210 g

- Glass card holder GCH3-31 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS).
- GCH3-31 serves for inserting the RFID card into the holder, whereby the system acquires the information about whether the hotel guest is present in the room. With this information it is possible to ensure for example Exit function with relation to energy savings in the absence of a guest in the room.
- Glass card holder is a design component of the iNELS system and is available in elegant black (GCH3-31/B) and white (GCH3-31/W) version.
- The GCH3-31 component is equipped with an RFID reader and is thus able to identify the specific hotel card inserted. Power saving function in the absence of a guest cannot be by passed by simply inserting business cards into the holder.
- GCH3-31 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types are MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The unit is also equipped with three touch buttons that can be used for example to set room status "Do Not Disturb" or "Make Up Room". This condition is then signalled to the glass card reader GCR3-11 or glass info panel GDB3-10 which are placed before the entrance to the room. Information may be sent directly to the hotel reception.
- Engraving of symbols is possible upon a request. The logo of the hotel can be shown as well. Likewise, it is also possible to adapt the card design.
- The GCH3-31 unit is equipped with an 8 A relay output and an AgSnO₂ contact.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GCH3-31 are designed for mounting into an installation box.

Connection

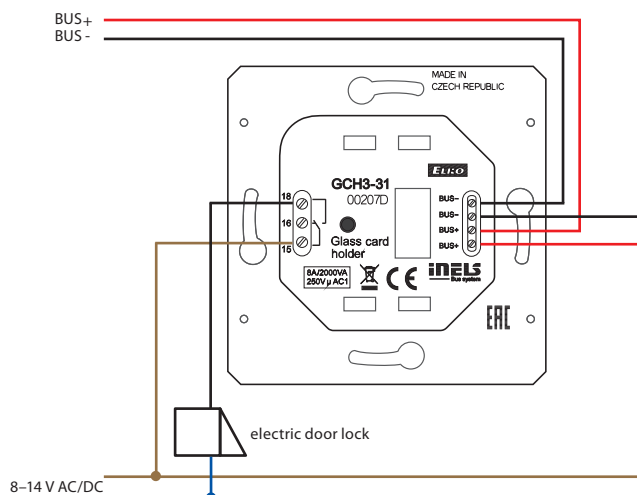

* Order codes of all colours are available in the iNELS price list.



EAN code

EHT3 (white frame, white intermediate frame, white back cover): 8595188156196

Technical parameters**EHT3****Display**

Type:	colored TFT LCD
Aspect ratio:	3:4
Visible area:	52.5 x 70 mm
Backlight:	active
Touchpad:	4-wire resistive
Display:	3.5"
Number of points:	240 x 320
Color Depth:	16.7 M (24 bit color)

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	150 mA (at 27 V DC)

Connection

Connection:	terminals
Connecting conductors profile:	max. 2.5/1.5 mm ² with sleeve

Operating conditions

Operating temperature:	0 to +55 °C
Storing temperature:	- 20 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	installation box


Dimensions and weight


Dimensions:	94 x 94 x 36 mm
Weight**	127 g

* Order codes of all colours are available in the iNELS price list.

** Weight is listed with plastic frame.

- The control unit with touch screen EHT 3 is a suitable control element for iNELS in places where it is required to control multiple devices. The unit replaces multiple controllers and allows minimisation of the number of switches on the wall.
- EHT3 control unit is also available in glass frames in black or white and is thus part of a comprehensive glass iNELS series of units for the management of the hotel rooms (GRMS).
- The EHT3 is primarily designed to control hotel rooms (Guest Room Management System), but it can also be used in other projects such as a multi-function control panel.
- EHT3 offers a user-friendly interface to control the hotel room; it was designed so that guests could easily create an environment that allows them to feel like home.
- Changing the Graphical Interface is possible in consultation with the manufacturer to adapt it to specific hotel, office building and restaurant projects.
- With the units it is possible to adjust the temperature (a version is available with the possibility to adjust the fan speed of fan coil units), light scenes, shading, music and it is also possible to transmit information "Do Not Disturb" and "Make Up Room"
- The unit enables the control of volume, choice of Internet radio stations from the LARA Radio player.
- "Do Not Disturb" and "Make Up Room" information about the state of the rooms can be visualized on a GHR3-11 glass reader or GDB3-10 glass info panel, which is located in the corridor at the entrance to the room, and it is also possible to send the information of these events directly to the front desk to inform staff.
- EHT3 features a 3.5" color touchscreen with an aspect ratio of 3:4. The basic display resolution is 240x320 pixels. The color depth is 16.7 million colors (24 bit color, True Color).
- Using the sensor touchpad, buttons and symbols can be operated on the screen by a gentle touch of a finger. The symbols on the screen are by "pressing" animate an associated outlet in the system.
- EHT3 design is drawn into a row of instruments LOGUS⁹⁰ (EHT3 but you cannot install into multi-frames with other devices in this design) and is designed for mounting into installation box.

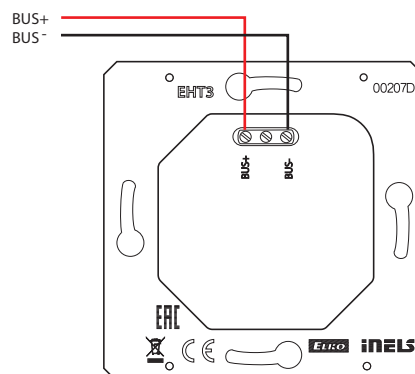Connection




The picture of device is illustrative, the icons (symbols) are configurable by the customer.

EAN code
GRT3-50/B: 8595188156301
GRT3-50/W: 8595188156349


Technical parameters		GRT3-50
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range	
Humidity measurement:	YES	
Humidity measurement range:	0 to 99 % RH	
Humidity measurement accuracy:	± 3 % relative humidity	
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20 °C to +120 °C	
Temperature measurement accuracy:	0.5 °C from the range	
Buttons		
Number of control buttons:	5	
Type:	capacitive	
Indication:	coloured illuminated symbol	
Display		
Display:	colored TFT, 20 x 25.5 mm	
Resolution:	240 x 240 pixels	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	85 mA (at 27 V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm ²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	94 x 94 x 36 mm	
Weight:	156 g	

- Glass room thermo-regulator GRT3-50 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-50 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-50 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-50 also has a further two touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the iNELS system and is available in elegant black (GRT3-50/B) and white (GRT3-50/W) version.
- Engraving of symbols is possible upon a request.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GRT3-50 are designed for mounting into an installation box.


Connection

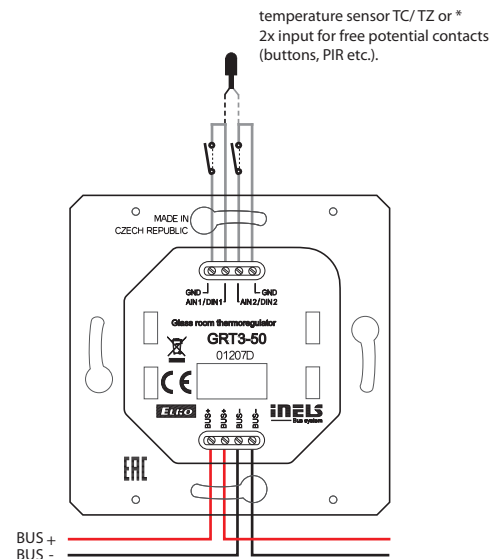

* The choice is made in iDM3 for each unit separately.

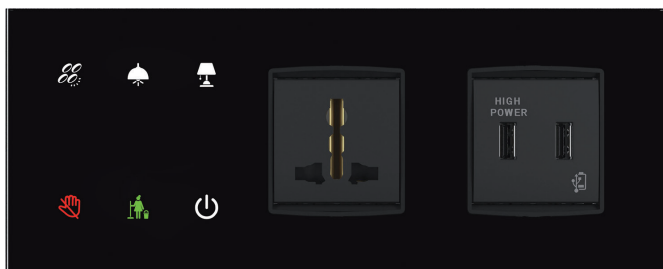

GBP3-60/BR/2F

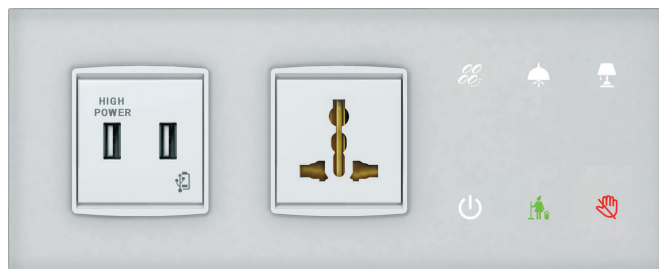

GBP3-60/WL/2F

EAN code

GBP3-60/BL/2F: 8595188135320
 GBP3-60/WL/2F: 8595188135337
 GBP3-60/BR/2F: 8595188157285
 GBP3-60/WR/2F: 8595188157292

Technical parameters	GBP3-60
Inputs	
Inputs:	2x AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range
Illuminance sensor:	1 to 100 000 Lx
Buttons	
Number of control buttons:	6
Type:	capacitive
Indication:	coloured illuminated symbol
Outputs	
Acoustic output:	piezo-changer
Tactile output:	vibration motor
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	25-50 mA (at 27 V DC), from BUS
Connection	
Terminals:	0.5 - 1 mm ²
Operating conditions	
Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the thermostat
Dimensions and weight	
Dimensions:	GBP3-60/1F: 165 x 94 x 36 mm, GBP3-60/2F: 236 x 94 x 36 mm
Weight:	according to the selected module


* Order codes are available in the INELS price list.

The picture of device is illustrative, the icons (symbols) and wiring accessories are configurable by the customer.

- Glass bedside panel GBP3-60 is part of a comprehensive range of iNELS control units for guest room management system (GRMS). Bedside panel is composed from 3-MODULE, of which one is module of touch buttons and two are modules to power for example mobile devices.
- The GBP3-60 is available in several designs, making it a very flexible and effective solution for a variety of projects. The following variants are available:
 - left/right version provides the same ease of operation from both sides of the bed.
 - 2-MODULE (1F)/3-MODULE (2F) design enables you to add a touch module with one or two power supply modules, network connection or multimedia.
 - black/white elegant design suitable for almost any interior.
- GBP3-60 panel is equipped with six customizable touch buttons whose function can be software adapted to the requirements of the investor. Of course there is the possibility of using the "Master OFF", then you can select functions for switching and dimming of lighting, shading control, different scenarios etc.
- Engraving of symbols is possible upon a request.
- GBP3-60 can be equipped with a number of modules, for example.
 - power AC sockets: French, British, Multi, and Shockproof
 - other types of modules: USB, LAN, Media
- The GBP3-60 panel is equipped with an ambient light sensor.
- Individual symbols can be illuminated in one of three colours - red, green and blue.
- GBP3-60/1F is designed for mounting into a double mounting box, GBP3-60/2F to a triple mounting box (distance between the centres of each of openings is 71 mm).

Connection

GBP3-60/xR/2F-23x-20x

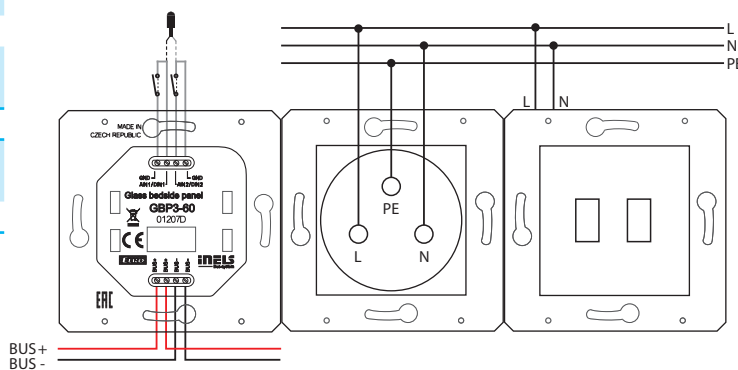


Switch

Push button




One switch /1M



One switch /2M



Three switches



One Push button /1M



One Push button /2M

- 11B (20001) 12B (20001.2) 14B (20003)
- 11W (20001.B) 12W (20001.2.B) 14W (20003.B)

- 49B (20008) 50B (20008.7)
- 49W (20008.B) 50W (20008.7.B)

Socket




USA outlet



Schuko outlet



French outlet



3 PIN outlet



British outlet



Multistandard outlet

- 21B (20242) 22B (20208) 23B (20212) 24B (20214) 25B (20219) 26B (20257)
- 21W (20242.B) 22W (20208.B) 23W (20212.B) 24W (20214.B) 25W (20219.B) 26W (20257.B)

Data & Audio/Video



USB power supply unit



TV-FM-SAT socket outlet



VGA connector

- 20B (20295) 31B (20303) 32B (20348)
- 20W (20295.B) 31W (20303.B) 32W (20348.B)



TV outlet



Phone outlet



A/V connectors



UTP outlet



USB supply unit



Switch (CBs)



HDMI connector



USB outlet


- 41B (20313) 42B (20320) 43B (20335) 44B (20337.6) 48B (20292) 46B (20405.06) 47B (20346.H) 45B (20345)
- 41W (20313.B) 42W (20320.B) 43W (20335.B) 44W (20337.6.B) 48W (20292.B) 46W (20405.06.B) 47W (20346.H.B) 45W (20345.B)

(Number in brackets is original Vimar product code.)

Glass Bedside Panel


Configure bedside panel according to your request.

L (left option)

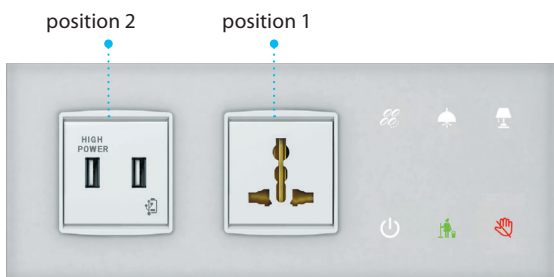


GBP3-60/WL/2F-26W-20W


R (right option)

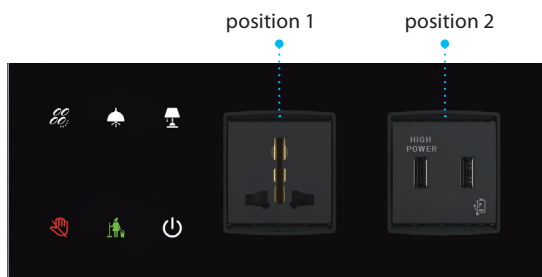

GBP3-60/BR/2F-26B-11B44B

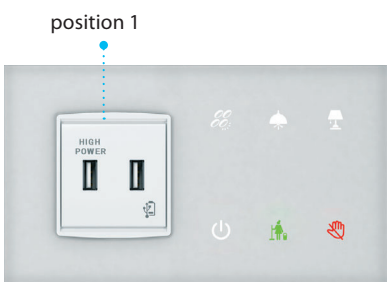


GBP3-60/WL/1F-20W

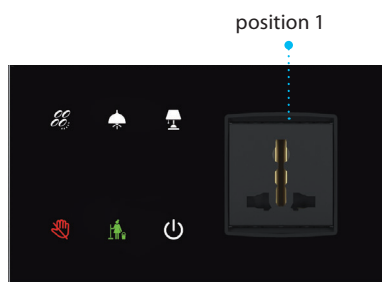

GBP3-60/BR/1F-26B

Part number

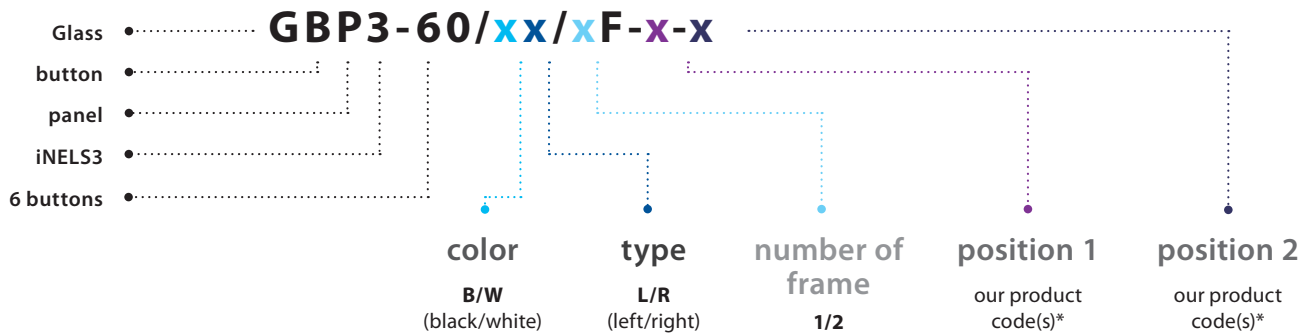

* In case of 1-MODULE choice it is necessary to pick 2x 1-MODULE to fill up the 1 position, for example GBP3-60/WL/1F-21W45W.

Classic plate



Glass white ice /2M



Glass black ice /2M





Glass black ice /3M



Glass black ice /4M

If you have any question contact our sales representative.
 For more information: www.vimar.com/en/int/catalog/product

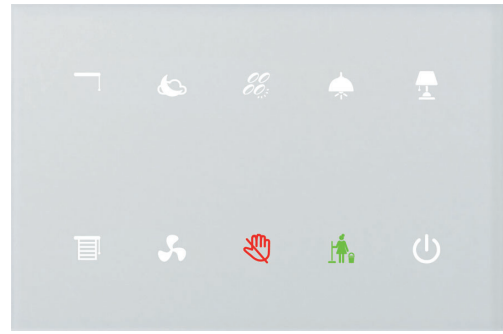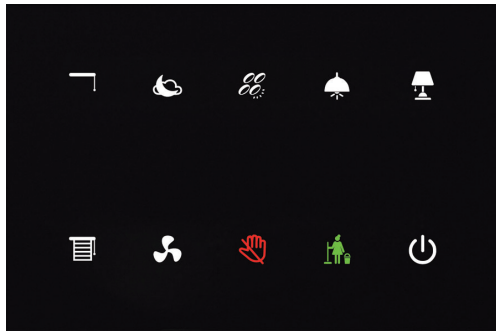


The picture of device is illustrative, the icons (symbols) are configurable by the customer.

EAN code*
GSP3-100/B: 8595188156288
GSP3-100/W: 8595188156325




Technical parameters		GSP3-100
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range	
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20 °C to +120 °C	
Temperature measurement accuracy:	0.5 °C from the range	
Buttons		
Number of control buttons:	10	
Type:	capacitive	
Indication:	coloured illuminated symbol	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25-65 mA (at 27 V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm ²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	142 x 94 x 36 mm	
Weight:	208 g	

- Glass Touch Panel GSP3-100 is part of a comprehensive iNELS series of units for the management of the hotel rooms (GRMS), but the unit can be used wherever it is required to control multiple devices from one location.
- GSP3-100 is equipped with ten touch buttons whose functions can easily be edited using the software.
- Engraving of different symbols on the unit is also possible upon a request.
- Individual symbols can be any one of seven backlight colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSP3-100/B) and white (GSP3-100/W) versions.
- Compared with standard glass touchscreen controllers with symbols GSB3-20/SB, GSB3-20/SW, GSB3-40/SB, GSB3-40/SW, GSB3-60/SB and GSB3-60/SW the GSP3-100 is one and a half times the width.
- The touch panel is equipped with an integrated temperature sensor. It is also equipped with two analogue-to-digital inputs (AIN/DIN), which can be used to connect two potential free contacts or one external temperature sensor TC/TZ (e.g. For measuring the temperature of the floor).
- The touch panel is also equipped with an ambient light intensity sensor. Based on information from the sensor it can light up indicative illumination symbols or perform various actions with the iDM3 software, e.g. To also switch the lighting circuits in the room.
- Advantages over conventional switches/buttons is saving space, signalling the state of any system output, the ability to measure temperature and an option to connect external pushbuttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign a different function or macro (set of functions) to each button. It is therefore possible to use one button to control several appliances.
- GSP3-100 is designed for mounting into an installation box.

Connection

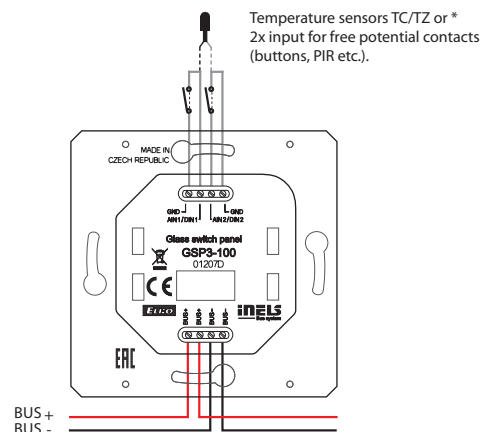

* The choice is made in iDM3 for each unit separately.



EAN code
GSB3-20/SB: 8595188156219
GSB3-40/SB: 8595188156233
GSB3-60/SB: 8595188156257

Technical parameters GSB3-20/S GSB3-40/S GSB3-60/S

Inputs

Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range
Inputs:	2x AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range
Illuminance sensor:	1 to 100 000 Lx

Buttons

Number of control buttons:	2	4	6
Type:	capacitive		
Indication:	coloured illuminated symbol		

Outputs

Acoustic output:	piezo-changer
Tactile output:	vibration motor

Communication

Installation BUS:	BUS
-------------------	-----

Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25-35 mA	25-43 mA	25-50 mA
	(at 27 V DC), from BUS		

Connection

Terminals:	0.5 - 1 mm ²
------------	-------------------------

Operating conditions


Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the thermostat

Dimensions and weight

Dimensions:	94 x 94 x 36 mm
Weight:	154 g

The picture of device is illustrative, the icons (symbols) are configurable by the customer.



- Glass touch controllers with symbols GSB3-20/S, GSB3-40/S and GSB3-60/S are part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects for example as a part of guest room management system (GRMS).
- GSB3-20/S is equipped with two, GSB3-40/S with four and GSB3-60/S six touch buttons whose functions can easily modify by the software.
- Engraving of symbols is possible upon a request.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSB3-20/SB, GSB3-40/SB, GSB3-60/SB) and white (GSB3-20/SW, GSB3-40/SW, GSB3-60/SW) versions.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- The glass touch controllers is equipped with an integrated temperature sensor. It is also equipped with two analog-to-digital inputs (AIN/DIN), which can be used to connect two potential-free contacts or one external temperature sensor TC/TZ (for example temperature measurement of the floor).
- The glass touch controllers are also equipped with a sensor of ambient light intensity. Based on information from the sensor it can switch backlight of symbols or perform various actions in the iDM3 software, for example also switch the lighting circuits in the room.
- Advantages over conventional switches/buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- GSB3-20/S, GSB3-40/S, and GSB3-60/S are designed for mounting into an installation box.



EAN code	
GSB3-20/SW: 8595188156226	GSB3-20/PRO/SW: 8595188175098
GSB3-40/SW: 8595188156240	GSB3-40/PRO/SW: 8595188175074
GSB3-60/SW: 8595188156264	GSB3-60/PRO/SW: 8595188175050

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Connection

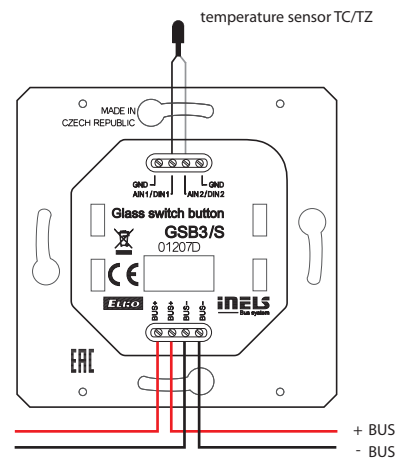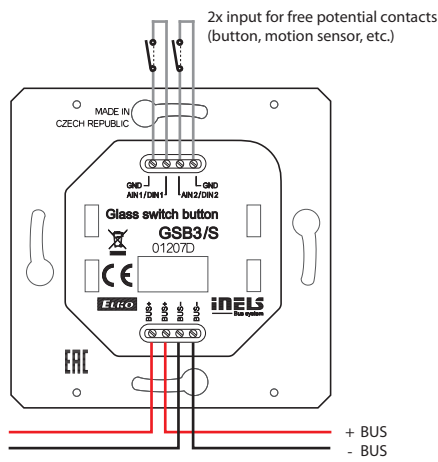


iNELS NIAGARA & FLOWBOX



Buildings today are equipped with an array of systems to control HVAC (heating, ventilation and air conditioning), lighting, shading, security, GRMS (Guest Room Management System), energy management, emergency lighting, fire alarms, CCTV, access control systems, elevators and other technologies. Effective integration and communication among the various systems in the building is critical to creating a comfortable environment for all users, to reduce building operation costs and reduce carbon dioxide emissions required for the operation of buildings. iNELS is a great solution for a variety of jobs, particularly in the areas of lighting, shading and GRMS (Guest Room Management System), and thanks to its modular and flexible topology it is used in commercial projects of hotels, office buildings, restaurants, wellness centres or manufacturing plants and warehouses.

iNELS is fully compatible with BMS (Building Management System) Niagara and Flowbox platform, which offers a clear and efficient user interface for all - investors, management, users, operators and system integrators. iNELS with Niagara or Flowbox enables the integration of dozens of iNELS central units and all other protocols that are installed within buildings. There are controllers for the actual control of all processes in the building. Supervisor licenses for the deployment on the operator's computer are used to supervise the operation of the system, receiving alarms and notifications and evaluation of historical data and graphs. Thanks to its wide range of possible operating pre-sets, BMS allows to achieve the most economical operation of the building. User interface uses a very efficient modern design language and using of templates greatly reduces the required integration time.

Feature	iNELS [®] iDM	powered by niagara framework [®]	 FLOWBOX
programming interface	✓	✓	✓
virtual wire amount limitation	✓	✗	✗
integration of mathematical or logical functions	✗	✓	✓
third-party interconnection (ASCII or software drivers)	✓ **	✓	✓
alarm / calls / text / e-mail notifications	✗	✓	✓
support of ORACLE hospitality solution (Fidelio / Opera)	✗	✓	✗
support of multiple CU3-OxM	✗	✓	✓
SCADA interface/support	✗	✓	✓
iNELS RF interconnection (RFIO or JSON)	✓	✓	✓
iNELS Air interconnection (MQTT)	✗	✓	✓
HTML5 / JavaScript frontend - dashboards and web supervisor	✗	✓	✓
multimedia integration (CCTV, audio, video)	✗	✓ ****	✗
History logging	✗	✓	✓
SQL interconnection	✗	✓	✓

* basic features implemented only
 ** partial support: via ASCII or selected drivers only
 *** partial support: calls and texts only
 **** partial support: CCTV only

CORE FEATURES:



A wide range of logical function blocks

BMS systems offers integrators dozens of function blocks for solving a variety of tasks within the building management. Function blocks are also divided into clear categories for easy navigation.

Management of alarms and notifications

Sophisticated alarm and notification management including the ability to send information via e-mail. Alarms can be backed up and user notes can be inserted to the individual alarms, for example on how to resolve the situation.

Supports virtually all universal protocols

Niagara and Flowbox are really versatile and supports dozens of universal and proprietary protocols, all the data points converted to a universal form, allowing truly free integration between all protocols.

Energy analysis

Energy management and cost analysis is the most important part of building management. BMS systems offer huge tracking capabilities and evaluating parameters related to energy consumption.

Multiplatform approach

By leveraging HTML5 Niagara and Flowbox offers a simple interface that eliminates the need to install various plugins. A unified user interface is available for all platforms - PC, tablet or mobile phone.

Archive logs and historical data

All historical data and logs can be stored at freely selectable intervals. The big advantage of BMS systems is that it allows all alarms, logs, visualization, calendars and configuration to be done by remote using a standard Web browser.

Advanced visualization

Part of BMS systems is an extensive graphics library for creating modern and well-arranged visualizations depicting the current state of the controlled technology.

Encrypted communication

Authentication requires the use of very strong credentials and all data communication is encrypted and this area is with the advent of the Internet of things (IoT) is given maximum attention.

Creating graphs/trends

Part of the visualizations is graphs that enable easy insertion of the monitored data to a chart by using "drag and drop" allowing more transparent comparison of values and storing graphs for later use.

Wide range of access for rights management

The big advantage of this solution is Niagara or Flowbox control access based on user roles, which enables users to perform only the well-defined actions given. All changes and events are also logged and stored for possible evaluation.

Customizable dashboards

Within the visualizations, dashboards are widely supported, which can also be accessed with dependant on the user rights and users are able to adapt these dashboards, e.g. monitored variables, according to their requirements. Each user can inspect the operation of buildings from different view and BMS freely enables effective adaptation.

Efficient navigation through the use of tags

Utilising tags streamlines the entire process, from configuration to management of the whole system. Using tags in combination with templates can significantly reduce configuration time; tags facilitate access control based on user rights, navigation in the whole project and user customization in the visualization.



PC



Notebook



Tablet



Smartphone


BMS
Building management system



powered by
niagara
framework®



XML

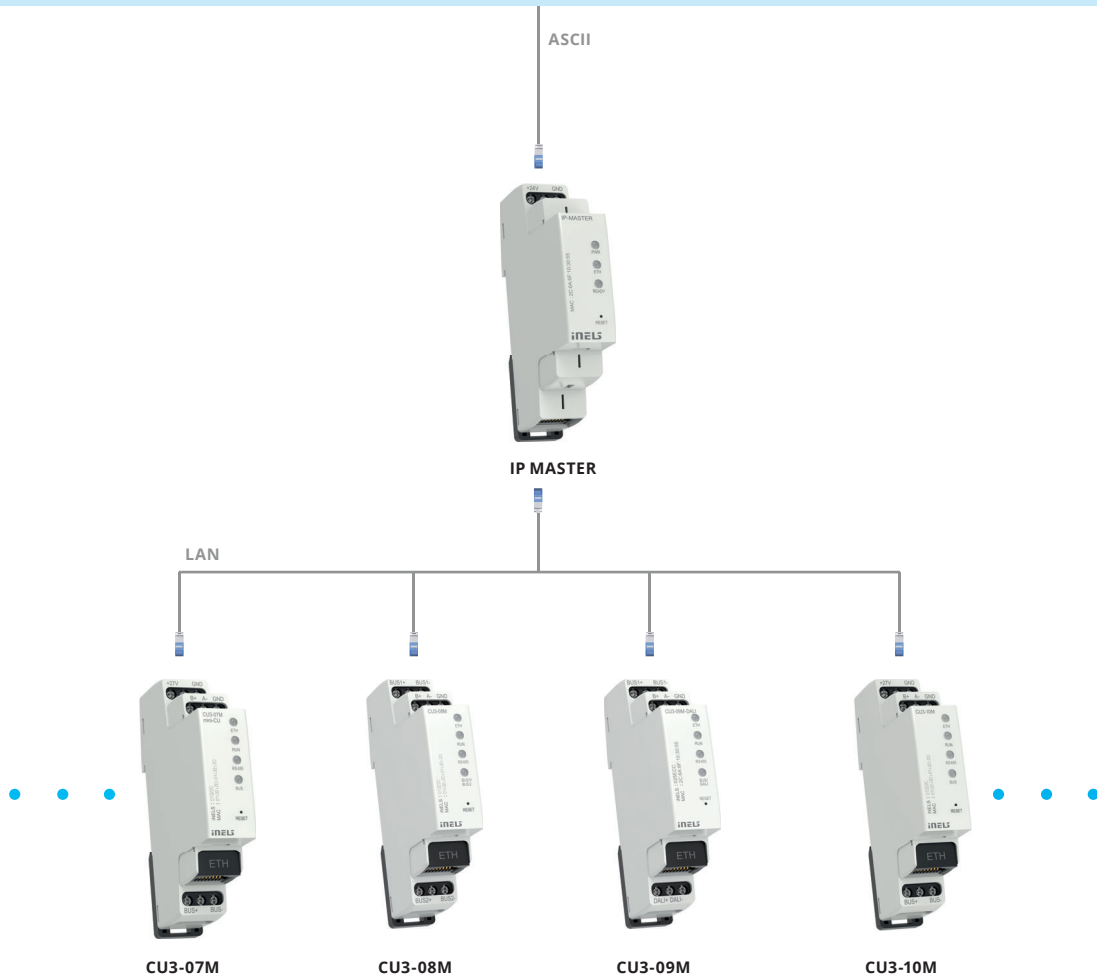




EAN code
 iNELS Bridge 24V DC: 8595188185097
 iNELS Bridge 230V AC: 8595188185240


Technical parameters		iNELS Bridge
Communication		
Communication network:	Ethernet	
Pre Installed software:	Connection Server, Home Assistant, Asterisk, MQTT Broker	
Ethernet		
Connectors:	RJ-45	
Communication speed:	10/100Mb	
Ethernet status indication:	LED link	
Preset IP address (ETH):	DHCP, mDNS	
Power supply		
Version 230V AC:	85–265VAC/5W	
Version 24V DC:	8–36VDC/1A	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Humidity:	max. 80%	
Degree of protection:	IP20	
Overvoltage category:	II.	
Degree of pollution:	2	
Operating position:	any	
Installation:	DIN rail EN 60715	
Design:	1-MODULE	
Terminal:	max. 2.5 mm ²	
Dimensions and weight		
Dimensions:	94 x 17.6 x 64mm	
Weight:	72 g	

- iNELS Bridge works as a gateway for connecting third party devices and integrating them into the iNELS environment
- It is a one module hardware contain powerful linux based computer.
- The unit comes with an option of pre-installed Connection server, Home assistant with inels driver and Asterisk.
- The server uses the open Home Assistant platform, which contains more than 1000 existing integrations
- The connection server is providing a communication environment between iNELS BUS System with the third-party devices, for which their protocols are also translated and submitted.
- iNELS Bridge is equipped with wifi and ethernet port for fast and easy communication.
- The configuration is happening on its own web interface, where the default IP address is not fixed. (The IP address is assigned from the DHCP server and it's needed to be known when we're connected to the network).

Device description

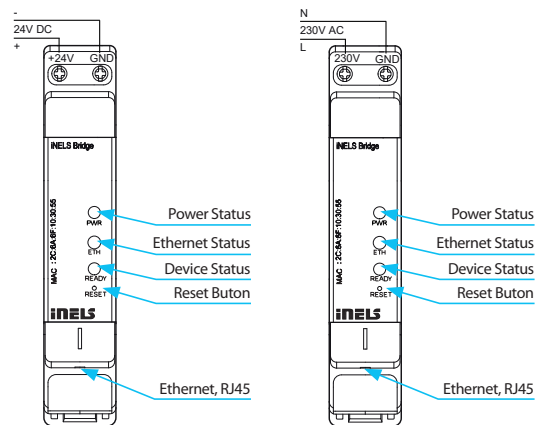

Infrastructure example

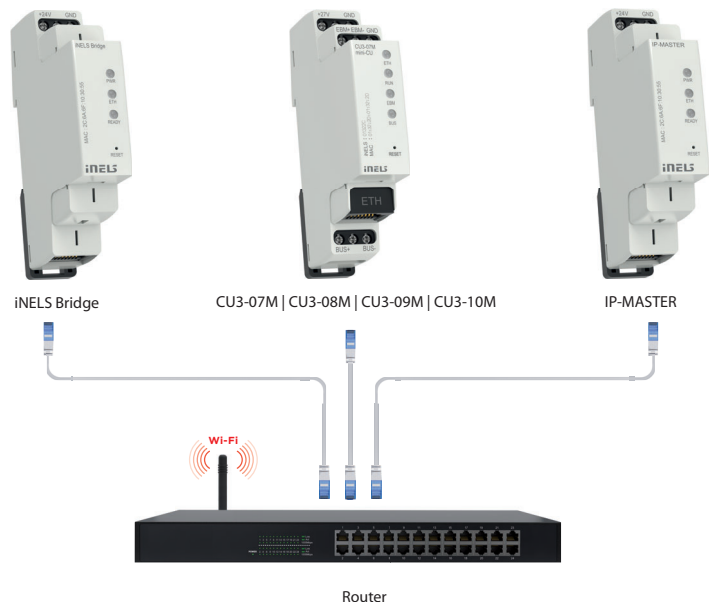



EAN code
Connection server II.: 8595188185080

Technical parameters	Connection Server II
Power:	USB Type-C PD 2.0 with 9V/2A, 12V/2A, 15V/2A, 20V/2A
Video Output:	HDMI
Audio Output:	3.5mm jack with mic
Processor (CPU):	64bits hexa core processor, Dual Cortex-72, frequency 1.8GHz with qual Cortex-A53, frequency 1.4GHz
Memory (SDRAM):	4 GB
Communication Interface:	Gigabit Ethernet, dual-band 802.11ac WiFi 5, Bluetooth 5.0
Connecting peripherals:	2x USB 3.0, 2x USB 2.0
Dimensions:	92,9 x 65 x 50,6 mm (l,w,h)

- The connection server is providing a communication environment between iNELS BUS System with the third party devices, for which their protocols are also translated and submitted.
- The iNELS application's environment enables us to control all these technologies from just one app.
- If the connection server is present in the installation, then it enables option for controlling the installation - lighting, blinds, heating, etc., also IP cameras, intercom, air conditioning.
- It also allows the communication with the domestic voice intercom 2N. It can also arrange the information from the weather station Giom or data from energy meters (electricity, water, gas), which is visualized in clear graphs.
- The device connection server uses the Rock Pi hardware and the apps requires a license relative to the MAC address of the device.
- While connecting with the devices connection server, it's recommended to use an uninterruptible power supply (UPS), which ensures that, there will be no power outage.
- As a part of the package, we also included an SD card where we previously installed Linux OS on it and its needed software equipment.
- The configuration is happening on its own web interface, where the default IP address is not fixed. (The IP address is assigned from the DHCP server and it's needed to be known when we're connected to the network).

These protocols are being translated:

- XML RPC (for communication with iNELS/iHC applications, Connection Server controls access to the central unit of iNELS/iHC applications and allows access to it from multiple devices).
- ELKONET (for communication with the iNELS central unit).
- VAPIX2, VAPIX3, ONVIF for cameras (which enables streaming up to 9 camera pictures together, PTZ controlling, recording on a network drive).
- Coolmaster (for communication with AC Daikin VRV, Sanyo VRF, Toshiba VRF, Mitsubishi Electric VRF, LG VRF, Fujitsu VRF, Mitsubishi Heavy VRF, Hitachi VRF).
- Atrea, AirPohoda (recuperation).
- NILAN (indoor climate solutions).
- SIP for domestic voice communication, for example: 2N (a communication between the iNELS/iHC app or between individual iNELS/iHC apps - VoIP).
- Giom3000 (displaying values from the weather station in the iNELS/iHC app and using the information about the temperature, humidity and wind speed to an subsequent event, for example removing the shutters).

Infrastructure example






EAN code
eLAN-IR-003: 8595188132831

Technical parameters		eLAN-IR-003
Senzor IR - learning mode		
Senzor IR:	infrared sensor for learning IR codes	
The carrier IR frequency:	20 - 455 kHz	
Learning distance:	till 1 m	
Outputs		
Output:	3x IR transmitter	
Connection:	3x 3.5 Jack connector, cable length 3 m	
Output indication:	3x LED green status IR1-IR3	
Range:	Up to 1 m from the device	
Ethernet communication		
Indication of ETH operating status:	green LED	
Indic. of ETH communication:	yellow LED	
Communication interface:	10/100 Mbps (RJ45)	
Default IP address:	192.168.1.1	
Power supply		
Voltage supply/jm. current:	10-27 V DC/200 mA (safe low voltage)	
Connection:	Jack connector Ø 2.1 mm	
Voltage supply indication:	green LED	
Other data		
Other possibilities of wiring:	USB-B connector	
Indication:	yellow USB LED status	
Reset button:	settings to their default values	
Power supply:	230 VAC/12 V DC supplied with the data logger	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Protection degree:	IP30	
Pollution degree:	2	
Operation position:	arbitrary	
Installation:	free	
Design:	design box	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	136 g	


- The applications iHC-MAIR and iHC-MIIR provide universal control for all Audio/Video devices (including air conditioning).
- The application is connected via smart phone connected to the smart IR box eLAN-IR-003, which communicates with audio/video devices via IR sensor.
- The intuitive application environment makes it simple for anyone to control.
- What all can you control? Home theater, TV, DVD or Blue Ray player, amplifier, set-top box, satellite receiver, air-conditioning, projector and more.
- It can control up to 100 arbitrary commands with various controllers that you normally have at home.
- With the scenes function you can perform multiple functions simultaneously by a single click command (e.g. you are going to bed you and switch off all AV appliances in the entire home with a single press).
- It is possible to integrate into a single application an unlimited number of IR boxes, meaning that in one application, you have control over the living room, children's rooms, etc.
- It is also possible to control remotely from anywhere using a Wi-Fi network (e.g. from work or vacation).
- Thanks to auto-IP acquisition from the DHCP server, you need not set up a network (if you have no set fixed IP address).
- You can connect three sensors to the smart IR box eLAN-IR-003 for three directions of control.

Example of connection

The front panel

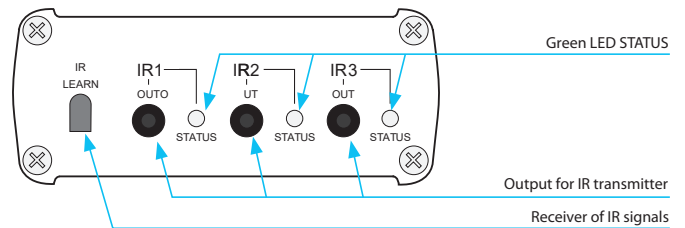

The back panel

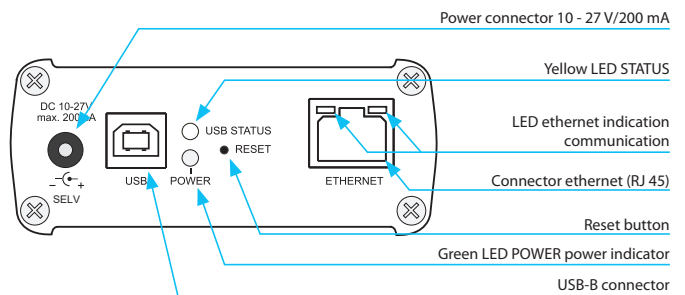

Controller options menu in the application





EAN code
eLAN-RS485/232: 8595188170260

Technical parameters eLAN-RS485/232

Interface Ethernet

ETH operating status indicator:	green LED
ETH communication indicator:	yellow LED
Communications interface:	100 Mbps (RJ45)
IP address support:	static, DHCP client
Factory setting:	DHCP client

Interface RS485

Broadcast indication:	red LED
Connector:	PUSH IN max 1.5 mm ²
Bus termination on the eLAN-RS side:	120 Ω resistor (implemented inside the eLAN-RS485/232)
Range:	500 m (depending on used cable and communication speed)
Communication speed:	adjustable, max. 230.4 Kbps
Max. connection:	32 devices
Communication:	half-duplex transmission
Type of communication:	MODBUS - RTU, TCP - RS485 Bridge, EZS Jablotron, Air Pohoda, LG PI485, Daikin RTD-NET, Cairox, Mitsubishi Melcobems MINI, Misolsr
Parity setting:	none, odd, even
Length:	5/6/7/8 bit
Stop bit:	1/2

Interface RS232

Broadcast indication:	red LED
Connector:	PUSH IN max 1.5 mm ²
Range:	50 m (depending on used cable and communication speed)
Communication speed:	adjustable, max. 230.4 Kbps
Max. connection:	1 device
Communication:	full-duplex transmission
Type of communication:	MODBUS - RTU, TCP - RS232 Bridge, EZS Paradox, Aseko
Parity setting:	none, odd, even
Length:	5/6/7/8 bit
Stop bit:	1/2

Power supply

Indication:	yellow LED STATUS
Supply voltage/current:	10-27 V DC/200 mA SELV
Power:	adapter with connector Jack Ø 2.1 mm (part of supply) Passive PoE or connector USB-B
Supply voltage indication:	green LED POWER
Button RESET:	To factory settings
Power source:	230 V AC/12 V DC supplied with the data logger

Operating conditions


Operating temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Protection degree:	IP20
Pollution degree:	2
Operation position:	arbitrary
Installation:	free
Design:	design box

Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	110 g

- The eLAN-RS485/232 is used to communicate with devices communicating via the Modbus RTU protocol, with the converter acting as a master unit.
- eLAN-RS485/232 is equipped with a web interface to configure the connected devices.
- Thanks to the web interface, the eLAN-RS485/232 can be used as a stand-alone device.
- eLAN-RS485/232 is integrated into the Connection Server, which makes it possible to control the connected technology through iNELS Home Control (iHC). Thus, it is possible to control, for example, ventilation systems and heat recovery from NILAN.
- It can be also used as a converter for data conversion from ESS systems like Jablotron or Paradox.
- The eLAN-RS485/232 is equipped with A, B and GND terminals for connection to the RS485 serial line on the back panel, as well as a signalling diode to indicate the status.
- The front panel features an RJ45 connector to connect to the Ethernet via a network cable.
- The power supply of the eLAN-RS485/232 is possible via a 10-27 V DC adapter (adapter included) or through a 24 V DC PoE, e.g. directly from a switch or PoE injector.
- The eLAN-RS485/232 requires the RS485 serial interface to be connected in line and to comply with all policy and installation requirements of this interface.

Example of connection

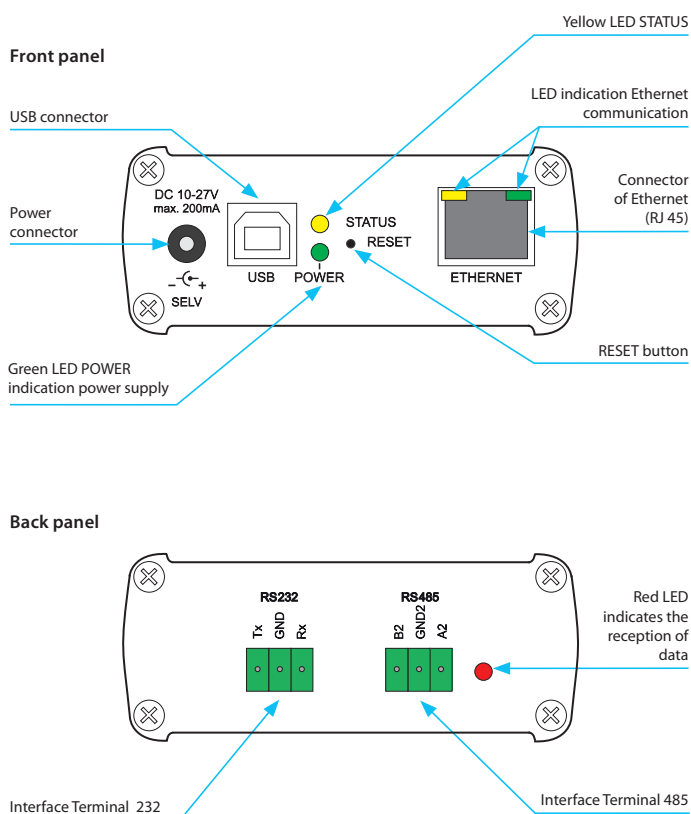



Radio



Music

Video-
telephone

Intercom



Audiozone

**Technical parameters****LARA Radio****Internet Radio**

Supported data transfer formats:	mp3, ogg, acc
----------------------------------	---------------

Control/Settings

Front panel:	touchscreen buttons
Communication Ethernet:	via PC setting up and communicating SW LARA Configurator
Button RESET:	restart product/ reset product to factory settings

Interface ethernet

Communications interface:	10/100 Mbps
Connector:	RJ45
Max. cable length UTP with power:	50 m

Display

Type:	color OLED
Resolution:	128 x 128 pixels
Visible surface:	26 x 26 mm

Power supply

Supply:	Passive PoE 24 V DC/1.25 A
Min. input:	1.4 W
Max. input:	26 W (peak at maximum playback performance)

Amplifier

Amplifier:	stereophonic class D with digital output control
Max. amplifier output:	2 x10 W/8 Ω

Inputs/Outputs

Microphone:	NO
Audio input:	3.5 stereo jack
Audio output 1:	terminals LINE OUT (used for external amplifier)*
Audio output 2:	terminals OUT L/OUT R (speaker output from int. amplifier)

Connection

Terminal block:	0.5 - 1 mm ²
-----------------	-------------------------

Other data

Working temperature:	0 to + 55 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Installation:	in an installation box

Dimensions and weight



Dimensions:	
- plastic:	85 x 85 x 46 mm
- metal, glass, wood, granite:	94 x 94 x 46 mm
Weight:	209 g (plastic frame)

* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.

- A music and internet radio player - all in the dimension of a switch and a luxurious LOGUS⁹⁰ design.
- LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Radio can play content from an external music source, which can be a smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Radio is equipped with an OLED colored display with the size of 1.5". The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- LARA Radio has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC/ 1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.

EAN code

LARA Radio white:	8595188148719
LARA Radio ivory:	8595188149242
LARA Radio ice:	8595188149228
LARA Radio pearl:	8595188149259
LARA Radio aluminium:	8595188149211
LARA Radio grey:	8595188149235

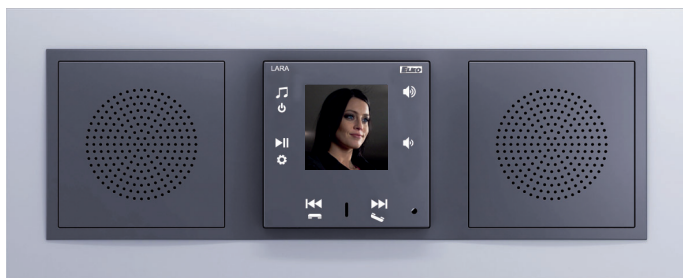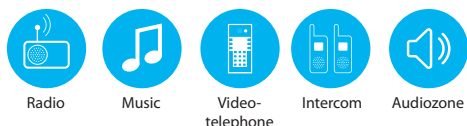

- LARA Intercom offers users 5 different functions and expands even more options to Lara Radio - music players and internet radio stations within the range of LOGUS⁹⁰ switch designs.
- LARA Intercom provides an extra functionality and videophone intercom.
- Thanks to videophone function, now it is possible to have a voice communication between LARA and the sound of the door (IP Intercom), so with someone visiting and standing in front of the house, we can see that on LARA display as part of this function which increases the security feeling and safety besides of course, the comfort for the user.
- LARA Intercom is equipped with an OLED colored display with the size of 1.5", which is used to transfer images and sounds from the door camera properly. The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- The intercom function can also be used for communications between all the family members throughout the whole house, thanks to two way voice communications possibilities between different LARA units.
- LARA Intercom continues to offer three functions that are also supported by LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Intercom can play content from an external music source, which can be a smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel. You can also use LARA for streaming your favorite music from Spotify Premium.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Intercom has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC/ 1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.

Technical parameters LARA Intercom

Internet Radio	
Supported data transfer formats:	mp3, ogg, acc
Control/Settings	
Front panel:	touchscreen buttons
Communication Ethernet:	via PC setting up and communicating SW LARA Configurator
Button RESET:	restart product/ reset product to factory settings
Interface ethernet	
Communications interface:	10/100 Mbps
Connector:	RJ45
Max. cable length UTP with power:	50 m
Display	
Type:	color OLED
Resolution:	128 x 128 pixels
Visible surface:	26 x 26 mm
Power supply	
Supply:	Passive PoE 24 V DC/1.25 A
Min. input:	1.4 W
Max. input:	26 W (peak at maximum playback performance)
Amplifier	
Amplifier:	stereophonic class D with digital output control
Max. amplifier output:	2 x10 W/8 Ω
Inputs/Outputs	
Microphone:	YES
Audio input:	3.5 stereo jack
Audio output 1:	terminals LINE OUT (used for external amplifier)*
Audio output 2:	terminals OUT L/OUT R (speaker output from int. amplifier)
Connection	
Terminal block:	0.5 - 1 mm ²
Other data	
Working temperature:	0 to + 55 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Installation:	in an installation box
Dimensions and weight	
Dimensions:	
- plastic:	85 x 85 x 46 mm
- metal, glass, wood, granite:	94 x 94 x 46 mm
Weight:	209 g (plastic frame)

* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.


EAN code	
LARA Intercom white:	8595188149389
LARA Intercom ivory:	8595188149419
LARA Intercom ice:	8595188149396
LARA Intercom pearl:	8595188149426
LARA Intercom aluminium:	8595188149372
LARA Intercom grey:	8595188149402

Touchscreen operation

Source Selection - Radio, AUX, Audio zone
Power ON/OFF

Choice - PLAY/PAUSE
Enter the menu

Change radio/songs, move the menu
Intercom Version:
Short push on call - call termination



Volume control

Volume control

Change radio/songs, move the menu
Intercom Version:





Long press - access to contact list

Long press on the call list, initiate contact


Short push on call - open el. door lock

Applications control

Operations, using the application for, LARA Dio and iNELS Home Control for Android and iOS smartphones and tablets.

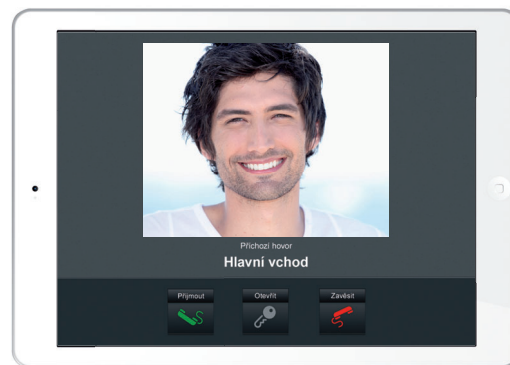

Wiring example

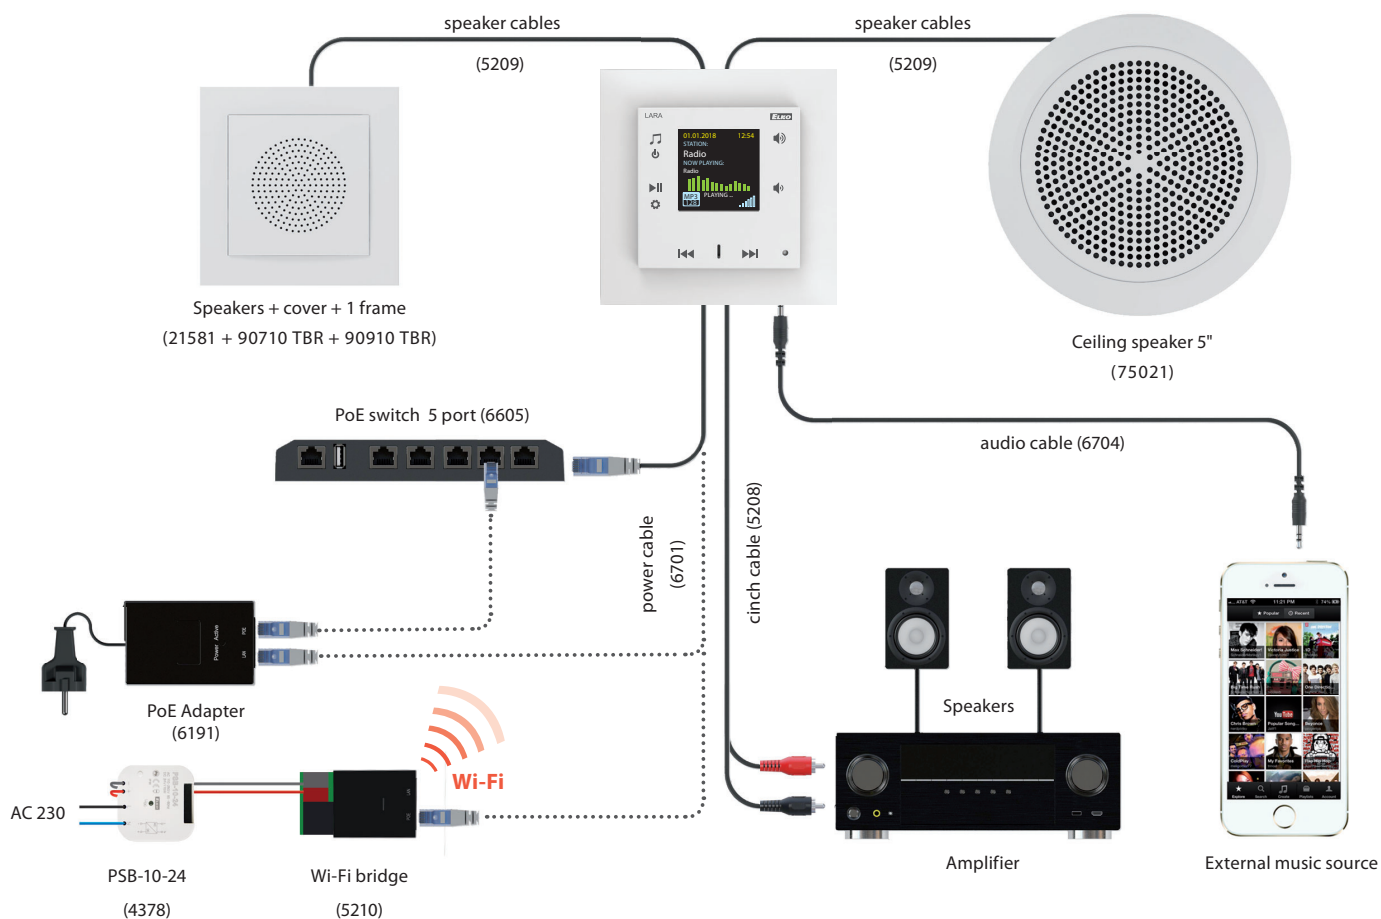

Speakers and cables

	AUX CABLE LARA (LARA CINCH CABLE) Used to connect LARA with exter. amplifier. Reduction 4pin from LARA LINE OUT to 2x CINCH plug into amplifier, length 2 x 20 cm.	5208
	POWER SUPPLY (PSB-10-24) Switching stabilized power supplies with fixed output voltage, intended for mounting into an installation box (e.g. KU-68). PSB-10-24 - stabilized power supply 24V/10 W.	4378
	AUX CABLE LARA (LARA AUDIO CABLE) Used to connect LARA with external music source (smart phone mp3 player). The length is 20 cm terminated with 2x stereo jack 3.5 mm.	6704
	CEILING SPEAKER Speaker is suitable for the installation in suspended ceilings and hollow walls. Mounting hole diameter 143 mm, Power 8 W, 32 Ω speaker impedance.	75021 CBR
	SURFACE SPEAKER Two-way speaker intended for mounting in a ceiling or on the walls: Power 15 W, 32 Ω speaker impedance, dimensions 270x183x37 mm. Color: White	75106 CBR
	NETWORK CABLE, 0.2 m Flat white LAN cable CAT5, length 20 cm, terminated with 2x RJ45 plugs.	6702
	NETWORK CABLE, 1 m Flat white LAN cable CAT5, length 1 m, terminated with 2x RJ45 plugs.	6700

Power supply and network

	WI-FI BRIDGE Used for LARA wireless connection via WiFi network.	5210
	PoE SWITCH - 5x RJ45 Provides LAN connectivity and PoE power supply for up to 5 x LARA.	6605
	PoE SWITCH - 8x RJ45 Provides LAN and connected PoE of up to 8x LARA. In addition to the 24 V PoE also offers a 48 V PoE for the power supply of 2N.	6606
	NAS EXTERNAL STORAGE Two-chamber NAS server with the function of hosting, sharing and data security.	7212

Power sets

	POWER SUPPLY PoE + WiFi INTO OR THE BOX WiFi bridge with PoE and power supply into an installation box. Power supply 230 V.	5224
	POWER SUPPLY PoE INTO A BOX PoE injector with power supply intended for an installation box. Power supply 230 V.	5226
	PoE SUPPLY Power injector with plug-in adapter 230 V.	5225
	POWER SUPPLY PoE + WiFi WiFi bridge with PoE plug in adapter 230 V.	5227

Installation material

	1-FRAME	90910 TBR
	2-FRAME	90920 TBR
	3-FRAME	90930 TBR
	4-FRAME	90940 TBR
	5-FRAME	90950 TBR
	SURFACE MOUNT BOX	10976 ABR
	INSTALLATION BOX 1 GANG (KP 67/2)	6705
	INSTALLATION BOX 2 GANG (KP 64/2)	6706
	INSTALLATION BOX 3 GANG (KP 64/3)	6707
	INSTALLATION BOX 4 GANG (KP 64/4)	6708
	INSTALLATION BOX 5 GANG (KP 64/5)	6709
	INSTALLATION BOX 1 GANG (KP 64/LD)	6710
	INSTALLATION BOX 2 GANG (KP 64/2L)	6711
	INSTALLATION BOX 3 GANG (KP 64/3L)	6712
	INSTALLATION BOX 4 GANG (KP 64/4L)	6713
	INSTALLATION BOX 5 GANG (KP 64/5L)	6714
	UNIVERSAL BOX 1068-02	6716
	UNIVERSAL BOX KUH 1/L NA	6717

2N Helios IP Verso



2N Helios IP Base




iNELS application: "ALL in ONE"

The application allows you to easily control connected devices such as socket switching, dimming of lights, control of blinds or garage doors, control of heating circuits and compatible air conditioning. Of course, the display of available values, such as temperature, the status of a motion, window, door or flood detectors, or the current status of all controlled devices.

It now brings a clear Dashboard, on which it is possible to display the most used devices, previews of connected cameras or created scenes. With one click, you can control several devices at once.


The iNELS application will gradually be supplemented with the possibility to connect new devices, new systems and central units as well as third-party devices. Enter a whole new stage with the new iNELS mobile application, expanding the functions and integration options of the iNELS 2022 system.

		Phase 1	Phase 2	Phase 3
Electroinstallation    	Lighting control	✓	✓	✓
	Garage doors and gates	✓	✓	✓
	Switching appliances	✓	✓	✓
	RGB bulbs and LED strips	✓	✓	✓
	Scenes	✓	✓	✓
	Detectors/sensors	✓	✓	✓
 HVAC	Heating	✓	✓	✓
	Air conditioning	✗	✓	✓
	Recuperation	✗	✓	✓
 Audio	LARA	✗	✓	✓
	NAS	✗	✗	✓
 3rd party	Cameras	✓	✓	✓
	Weather station	✗	✓	✓
	Intercoms	✗	✓	✓
	Home appliances	✗	✗	✓
 Energy management	Energy dashboard	✗	✓	✓
	History report (charts & graphs)	✗	✗	✓
 Voice assistants	Google Home	✓	✓	✓
	Amazon Alexa	✓	✓	✓
 Others	Automation	✗	✓	✓
	Notification	✗	✓	✓
	Widgets	✗	✓	✓
	Favourites/overview	✓	✓	✓
	Log history	✗	✓	✓
	eLAN-IR	✗	✓	✓
	Geolocation	✗	✓	✓
	Weather data	✗	✓	✓
	Home Assistant	✗	✓	✓
	Users management	✓	✓	✓

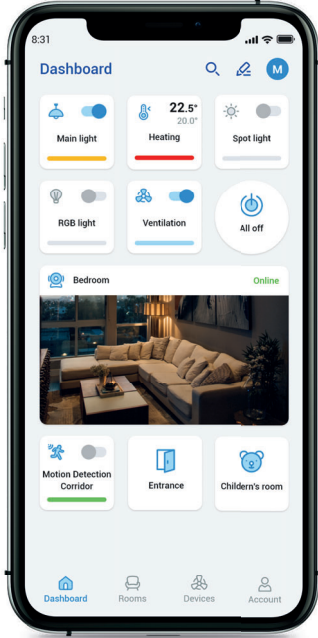


Dashboard

Absolute control over the state of all technologies.

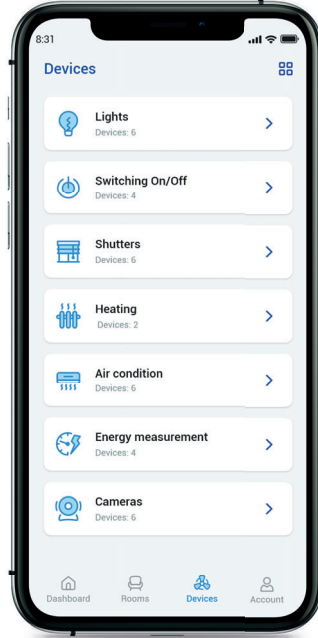


Device list

Control the device from anywhere.

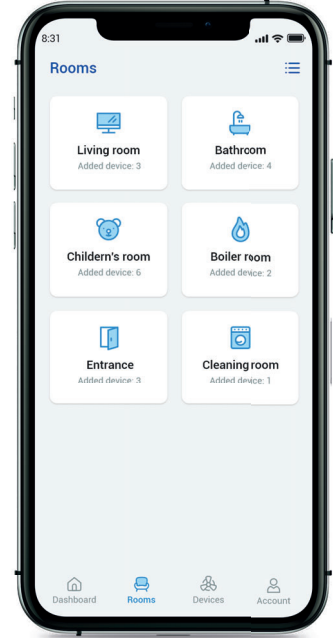


Rooms management

Settings according to individual rooms.

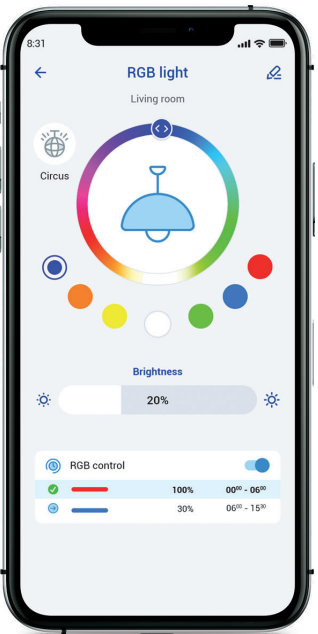

Colour setting

Easy adjustment of the light scene with one touch - switching, dimming, colour.

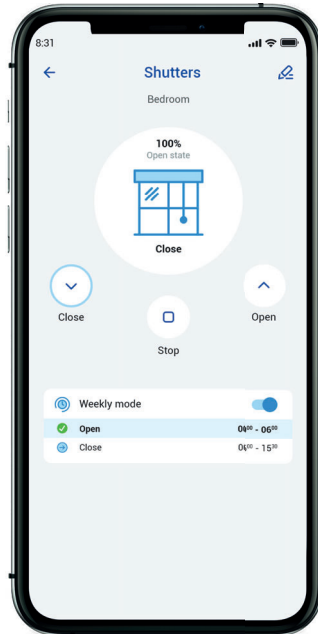

Shutters/Blinds

Possibility of individual or joint control of shading technology.



Temperature

You can set the temperature in each room exactly as you like.



EAN code
 Telva-2 230V, NC: 8595188181976
 Telva-2 230V, NO: 8595188181969
 Telva-2 24V, NC: 8595188181990
 Telva-2 24V, NO: 8595188181983

Technical parameters	TELVA 230V		TELVA 24V	
	NO	NC	NO	NC
Operating voltage:	230 V, 50/60 Hz		24 V, 50/60 Hz	
Switching current max:	300 mA		500 mA	
Operating current:	13 mA		100 mA	
Closing/opening time:	3–5 min		3–5 min	
Power input:	2.9 W		2.4 W	
Protection:	IP54		IP54	
Settings:	4 mm (0.16")		4 mm (0.16")	
Stopping force:	90–110 N		90–110 N	
Cable length:	800–1000 mm (31–39")		800–1000 mm (31–39")	
Connecting wire:	2 x 0.75 mm ²		2 x 0.75 mm ²	
Media temperature:	-5 °C to 60 °C (23 to 140 °F)		-5 °C to 60 °C (23 to 140 °F)	
Colour:	white RAL 9003		white RAL 9003	
Dimensions h/w/d:	63 x 42 x 45 mm (2.5 x 1.7 x 1.8")		63 x 42 x 45 mm (2.5 x 1.7 x 1.8")	
Connection size:	M30 x 1.5 mm (1.2" x 0.06")		M30 x 1.5 mm (1.2" x 0.06")	

- Thermdrive is intended for opening or closing valves in heating, cooling or air conditioning systems. It is also suitable for use in a floor heating or ceiling cooling manifolds.
- Available in NO (open without voltage), NC (closed without voltage) and for 230 V and 24 V.
- The internal principle of operation of thermdrive mechanism = its movement so that the valve opens/closes is provided by an electric heating element with expansion material, which expands due to temperature changes in the supply voltage.
- Thermdrive is maintenance-free and works completely silently.
- Thermdrive is fitted with a metal nut M30 x 1.5, thanks to which it becomes a 100% fixed part of the valve with this corresponding thread size after installation.
- The stated nut size predetermines the use of a thermocouple with valves from manufacturers such as Herz, HoneyWell, Danfoss, Oventrop and others.

• Telva thermo drive:

- is characterized by absolutely quiet and maintenance-free operation
- is designed for installation - control of heating and cooling systems
- method of mounting the actuator on the controlled valve using an M30 x 1.5 nut
- any working position

• Type of use:

- Floor heating – the RFTC-50/G wireless controller measures the room temperature and, based on the set program, sends a command to the RFSA-66M switching element to open/close the TELVA thermo drive on the distributor.

AN-I | Internal antenna



- into plastic switchboard
- rod angle, without cable
- sensitivity 1 dB
- the internal antenna is included in the standard package

EAN code
 Internal antenna AN-I: 8595188161862

AN-E1 | External antenna



- for mounting into metal switchboard
- cable length 3m
- sensitivity 5 dB
- the external antenna AN-E is supplied on request only

EAN code
 External antenna AN-E: 8595188190121



EAN code			
TC-0:	8595188110075	TZ-0:	8595188140591
TC-3:	8595188110617	TZ-3:	8595188110600
TC-6:	8595188110082	TZ-6:	8595188110594
TC-12:	8595188110099	TZ-12:	8595188110587
Pt100-3:	8595188136136	Pt100-6:	8595188136143
Pt100-12:	8595188136150		

- Thermister temperature sensors are made of Negative Temperature Coefficient (NTC) embedded in a PVC or metal sleeve with a thermally-conductive sealer.
- **Sensor TC**
 - lead-in cable to sensor TC is made of wire CYSY 2D x 0.5 mm/0.02".
- **Sensor TZ**
 - cable VO3SS-F 2D x 0.5 mm/0.02" with silicone insulation for use in high temperature applications.
 - silicone insulation for use in high temperature applications.
- **Sensor Pt100**
 - shielded silicon 2x 0.22 mm² (AWG 21), shielding connected with a case.
- temperature sensors can be connected directly to the terminal block
- cable lengths can not be changed, connected or modified.

Technical parameters	TC	TZ	Pt100
Range:	-20 to +80 °C	-40°C to +125 °C	-30°C to +200 °C
Scanning element:	NTC 12K	NTC 12K	Pt100
Tolerance:	±(0.15 °C + 0.002[t])	±(0.15 °C + 0.002[t])	±(0.3 °C + 0.005[t])
In air/in water:	(τ0.5) ≤ 18 s	(τ65) 62 s/8 s	(τ0.5) -/7 s
In air/in water:	(τ0.9) ≤ 48 s	(τ95) 216 s/23 s	(τ0.9) -/19 s
Cable material:	PVC unshielded, 2x 0.25 mm ²	PVC	shielded silicone 2 x 0.22 mm ²
Terminal material:	polyamid	stainless steel	copper
Protection degree:	IP67	IP67	IP67
Electrical strength:	2500 VAC	2500 VAC	2500 VAC
Insulation resistance:	> 200 MΩ at 500 VDC	> 200 MΩ at 500 VDC	> 200 MΩ at 500 VDC

Resistive values of sensors in dependance on temperature

Temperature (°C)	Sensor NTC (kΩ)	Sensor Pt100 (Ω)
20	14.7	107.8
30	9.8	111.7
40	6.6	115.5
50	4.6	119.4
60	3.2	123.2
70	2.3	127.1


Tolerance of sensor NTC 12 kΩ is ± 5% by 25 °C/77 °F.
 Long-term resistance stability by sensor Pt100 is 0.05% (10 000 hours).

Types of temperature sensors:

	TC-0	TZ-0	-
- length:	100 mm	110 mm	-
- weight:	5 g	4.5 g	-
	TC-3	TZ-3	Pt100-3
- length:	3 m	3	3 m
- weight:	70 g	106 g	68 g
	TC-6	TZ-6	Pt100-6
- length:	6 m	6 m	6 m
- weight:	130 g	216 g	149 g
	TC-12	TZ-12	Pt100-12
- length:	12 m	12 m	12 m
- weight:	250 g	418 g	249 g

τ65 (95): time, which sensor needs to heat up on 65 (95) % of ambient temperature of environment, in which is located.

Diagramm of sensor warm up via air

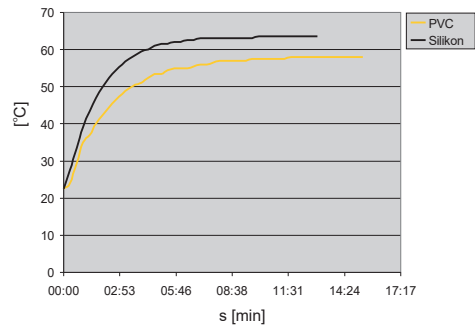

PVC - reaction to water temperature from 22.5 °C to 58°C.
 Silicone - reaction to water temperature from 22.5°C to 63.5°C.

Sensor photo

TC




TZ



Pt100



Drawing

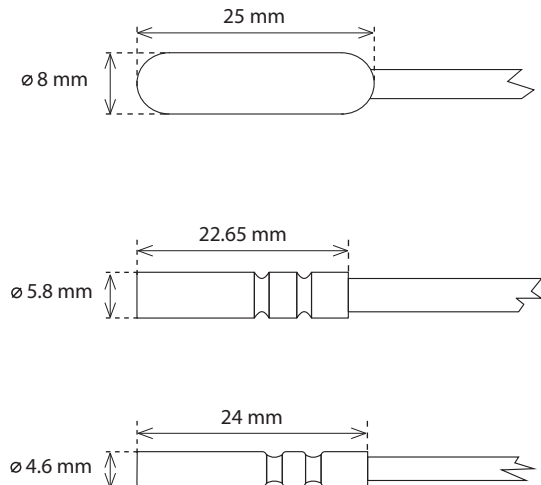

The BUS electro installation iNELS BUS System is a unique solution for electrical installation in the implementation of new projects of houses, villas, apartment buildings, office buildings, hotels, restaurants, wellness centres or perhaps even warehouse or production hall.

The ability to deploy this solution in such a wide variety of different buildings with various purposes and uses lies in its modularity. Thanks to the modular design, the system is very flexible and allows on the one hand, a solution of single-purpose tasks such as control of lighting in restaurants, and on the other hand, solving complex control systems for heating, ventilation, cooling, lighting and shading of office buildings. A complete range of control units designed from glass for management of hotel rooms is in the market unique.

Thanks to its modularity is very easy to customize the size of the system and to that effect create a cost effective solution.

Smart homes and buildings are accompanied by three basic ideas, namely savings, comfort and safety, the first two ideas may at first glance contradict each other. However, the main objective of smart home or building equipped with the iNELS solution is to attain the optimum indoor environment while achieving the most efficient operation of all system.

In homes and buildings the optimal internal environment is very important because people nowadays spend up to 80% of their time inside buildings. It is also shown that indoor environments, where we talk about thermal comfort, lighting comfort and indoor air quality significantly affect the mood and the effectiveness of people.

The iNELS system allows connection of wide range of sensors (temperature, light intensity, carbon dioxide, humidity, and pressure) and detectors (movement, opening doors and windows, gas leakage, smoke, flooding) whose values are constantly evaluated. At the same time iNELS allows the connection of all the technologies that are installed in the building, which continued to significantly increase operational efficiency or comfort, for example; in the case of integrating the guest room management system with the receptionist Fidelio system, which automatically during check-in, sends the room requests for execution, a welcome scene (optimum temperature, comfortable lighting scene, music etc.).

What are the benefits of BUS controlling?


- Save energy by regulating lighting and heating properly
- Control of blinds, awnings, exterior or internal window shutters
- Dimming lights, lighting scenes
- control of appliances or electrical devices
- Control access gates, garage doors
- Logical and central functions (exit button, ...)
- Manual and automatic control mode
- Preventing undesirable opening of a window or a door
- Responding to the movement of people (authorized and unauthorized)
- Remote monitoring via smartphone, tablet or laptop
- Possibility to control via the iNELS Touch Panel 10"
- Integration of third-party devices (cameras, air conditioning, ...)



More systems can be controlled by iNELS:



Push-button wall controller



Glass wall controller




Touch panel



Keychain



Remote control



Smartphone

Problematic choice of suitable relay contact for a particular load switched with a product is described below. Mostly we experience problems with incorrect choice of load (meaning incorrect relay for a particular load) which results in permanent switching of contact (sealing) or damage on relay contact – which then results in malfunction. What load can you use? Detailed types of load according to standard EN 60947 are described in charts below – categories of use.

Category of use	Typical use	EN
AC current, $\cos\phi = P/S$ (-)		
AC-1	Non-inductive or slightly inductive load, resistance furnace Includes all appliances supplied by AC current with power factor ($\cos\phi$) ≥ 0.95 Examples of usage: resistance furnace, industrial loads	60947-4
AC-2	Motors with slip-ring armature, switching off	60947
AC-3	Motors with short-circuit armature, motor switching when in operation This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current which is 5 up to 7 times rated current of motor.	60947-4
AC-4	Electro-motors with short-circuit armature: start up, braking by backset, changeover	60947
AC-5a	Switching of electrical gas-filled lights, fluorescent lights	60947-4
AC-5b	El. bulb switching Enables low contact loading due to resistance of cold fiber is many times smaller than the one of hot fiber.	60947-4
AC-6a	Switching of transformers	60947-4
AC-6b	Switching of capacitors	60947-4
AC-7a	Switching low inductive loads of home appliances and similar applications	60947
AC-7b	Load of motors for home appliances	60947
AC-8a	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-8b	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-12	Switching of semiconductor loads with separation transformers	60947-5
AC-13	Switching of semiconductor loads with separation transformers	60947-5-1
AC-14	Switching of low electro-magnetic loads (max.72 VA)	60947-5-1
AC-15	Management of alternating electro-magnetic loads This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA Use: switching coils of contactors	60947-5
AC-20	Connecting and disconnecting in unloaded states	60947-3
AC-21	Switching resistive loads, including low loading	60947-3
AC-22	Switching of mixed resistive and inductive loads, including low overloading	60947-3
AC-23	Switching of motor loads or other high inductive loads	60947-3
AC-53a	Switching of motors with short-circuit armature with semiconductor contactors	60947

Note: Category AC 15 replaces formerly used category AC 11

DC current, $t = L/R$ (s)

DC-1	Non-inductive or low inductive load, resistive furnaces	60947-4
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-6	Non-inductive or low inductive loads, resistive furnaces – el. bulbs	60947-4-1
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element	60947-5-1
DC-13	Switching of electromagnets	60947-5-1
DC-14	Switching of electromagnetic loads in circuits with limiting resistor	60947-5-1
DC-20a(b)	Switching and breaking without load(a: frequent switching ,b: occasional switching)	60947-3
DC-21a(b)	Switching ohmic loads including limiting overloading (a: frequent switching ,b: occasional switching)	60947-3
DC-22a(b)	Switching of compound ohmic and inductive loads including limited overloads (e.g. shunt motors) (a: frequent switching, b: random switching)	60947-3
DC-23	Switching of highly inductive loads (e.g. series motors)	60947-3

How can you distinguish for which load is our product (relay) designated?

Our company records this information on a products and also in our catalogue, instruction manual and other promotional and technical material (website etc.).

It is important to realize that it is not always possible to point out load because of lack of information about the device (user cannot measure $\cos\phi$) or it is not possible because of inconsistency of parameters of switched device. Manufacturer of relays records always guaranteed parameters in ideal conditions which are done by a norm (temperature, pressure, humidity, etc.) and reality can be in a lot of cases different. Category of use (classification) of a particular relay is done by material of output contacts.



















Basic types of materials which are used for production of contacts for high-performance relay are:

- AgCd – suitable for switching ohmic loads. Before of harmfulness of Cd, this type of contact is remitted.
- AgNi – designated for switching resistive loads, good quality switching and conducting (contact doesn't oxidate) small currents/voltages, it is not designated for surge currents and loads with inductive component.
- AgSn or AgSnO₂ – suitable for switching loads with inductive component, not suitable for switching small currents/voltages, it is more resistive to surge currents, suitable for DC voltage switching, less suitable for switching loads of ohmic type.
- Wf (wolfram)-special contact designated for switching surge currents with inductive component.
- with gold (AgNi/Au)- Used for "improving" contacts for low currents/ voltages , prevents oxidation.



















Minimum load		
Relay contact	mV	V/mA
AgSnO ₂	1000	10/100

Minimum load		
Relay contact	mV	V/mA
AgNi	300	5/10



















GCR3-11, GCH3-31, GMR3-61, SA3-02B, SA3-06M, SA3-012M, WMR3-21

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgSnO ₂ contact 8 A	250 V/8 A	250 V/2.5 A	250 V/1.5 A	230 V/1.5 A (345 VA)	230 V/1.5 A (345 VA) till max output C=14uF	250 W	250 V/4 A	250 V/1 A	250 V/1 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgSnO ₂ contact 8 A	x	250 V/3 A	250 V/3 A	24 V/8 A	24 V/3 A	24 V/2 A	24 V/8 A	24 V/1 A	x



















LBC3-02M, SA3-04M, SA3-022M (RE7 - RE-10), JA3-018M (U/D1 - U/D9)

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgSnO ₂ contact 16 A	250 V/16 A	250 V/5 A	250 V/3 A	230 V/3 A (690 VA)	230 V/3 A (690 VA) till max output C=14uF	1500 W	x	250 V/3 A	250 V/10 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgSnO ₂ contact 16 A	250 V/6 A	250 V/6 A	250 V/6 A	24 V/16 A	24 V/6 A	24 V/4 A	24 V/16 A	24 V/2 A	24 V/2 A





SA3-02B/Ni*, SA3-06M/Ni*, SA3-012M/Ni*

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgNi contact 8 A	250 V/8 A	250 V/2.5 A	250 V/1.5 A	230 V/1.5 A (345 VA)	x	400 W	x	250 V/1.5 A	250 V/5 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgNi contact 8 A	250 V/3 A	250 V/3 A	250 V/3 A	24 V/8 A	24 V/3 A	24 V/2 A	24 V/8 A	24 V/1 A	24 V/1 A

SA3-06M/Ni*, SA3-04M/Ni*








Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgNi contact 16 A	250 V/16 A	250 V/5 A	250 V/3 A	230 V/3 A (690 VA)	x	800 W	x	250 V/3 A	250 V/10 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgNi contact 16 A	250 V/6 A	250 V/6 A	250 V/6 A	24 V/16 A	24 V/6 A	24 V/4 A	24 V/16 A	24 V/2 A	24 V/2 A

JA3-018M (U/D1 - U/D9),
SA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER),
EA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER),
FA3-612M (FAN1 - FAN3, RE)













Type of load	 $\cos \varphi \geq 0.95$			
Contact material	AC1	AC3	AC15	DC1
AgNi contact 6 A	250 V/6 A	230 V/0.8 A	230 V/1.3 A	30 V/3 A 110 V/0.2 A 220 V/0.12 A

Demonstrated symbols are informative.

*Products with AgNi contact only up on request for extra charge.

Load	bulbs, halogen bulbs	12–24 V low-voltage bulbs, coil transformers	12–24 V low-voltage bulbs, electric transformers	LEDs	energy-saving fluorescent tubes	control method	
							
	R	L	C	dimmable	dimmable	entering edge	trailing edge
DA3-22M	•	•	•	•	•	•	•
DA3-66M	•	•	•	•	•	•	•

Explanations

	El. bulbs loads: el. bulb, halogen light (R)		Elektronic ballasts for fluorescent (L)
	Dimmer with defined load: R - resistive, L - inductive, C - capacitive		Inductive loads (transformers): feromagnetic and toroid transformers for lights with various voltage.
	Fluorescent light: fluorescent lights uncompensated		Switch: switch - control contact of various device
	Fluorescent light: fluorescent light compensated in series		Button: control button
	Fluorescent light: fluorescent light compensated in parallel		Control module: analog control module 0 - 10 V
	Fluorescent light: fluorescent light economical		Motor

Category of use	Typical use
-----------------	-------------

AC current, $\cos\varphi = P/S$ (-)

AC-1	Non-inductive or slightly inductive load, resistance furnace. Includes all appliances supplied by AC current with power factor ($\cos\varphi$) ≥ 0.95 . Examples of usage: resistance furnace, industrial loads.
AC-2	Motors with slip-ring armature, switching off.
AC-3	Motors with short-circuit armature, motor switching when in operation. This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current, which is 5 up to 7 times rated current of motor.
AC-5a	Switching of electrical gas-filled lights, fluorescent lights.
AC-5b	El. bulb switching. Enables low contact loading due to resistance of cold filament is many times smaller than the one of hot filament.
AC-6a	Switching of transformers.
AC-7b	Load of motors for home appliances.
AC-12	Switching of semiconductor loads with separation transformers.
AC-13	Switching of semiconductor loads with separation transformers.
AC-14	Switching of low electro-magnetic loads (max. 72 VA).
AC-15	Management of alternating electro-magnetic loads. This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA. Use: switching coils of contactors.

Note: Category AC 15 replaces formerly used category AC 11.

DC current, $t = L/R$ (s)


DC-1	Non-inductive or low inductive load, resistive furnaces.
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking.
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking.
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element.
DC-13	Switching of electromagnets.
DC-14	Switching of electromagnetic loads in circuits with limiting resistor.



1) Surface mounted

Wall mounted in an installation box with spacing of 65 mm.


EST3	GSB3-40/S
EHT3	GSB3-60/S
GBP3-60x	GSP3-100
GCR3-11	GMR3-61
GCH3-31	IDRT3-1
GRT3-50	WMR3-21
GSB3-40	WSB3-20
GSB3-60	WSB3-20H
GSB3-80	WSB3-40
GSB3-20/S	WSB3-40H

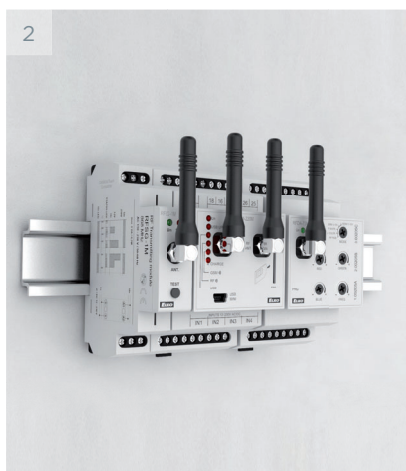

2) DIN Rail mounted

On DIN rail according to EN 60715.

ADC3-60M	LBC3-02M
CU3-07M	PS3-30/iNELS
DA3-66M	PS3-100/iNELS
DA3-22M	SA3-04M
DAC3-04M	SA3-06M
EMDC-64M	SA3-012M
FA3-612M	SA3-022M
IM3-140M	TI3-60M
IOU3-108M	
JA3-018M	

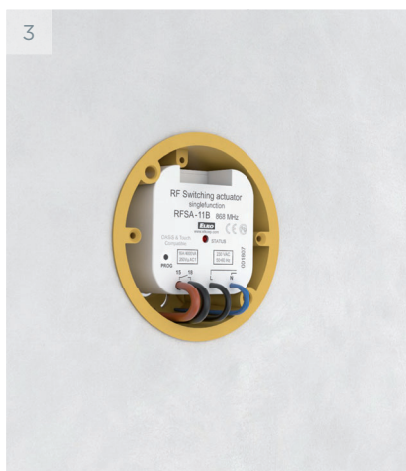

4) Mounted to or in the installation box

Mounted in an installation box or built into the device.

IM3-40B	SA3-01B
IM3-80B	SA3-02B
JA3-02B/DC	TI3-40B



4) Mounted into the cover of appliance

SA3-01B
SA3-02B

5



5) Surface mounted

Other attachment options.

DLS3-1


6



6) Ceiling mounting


DMD3-1

1-MODULE

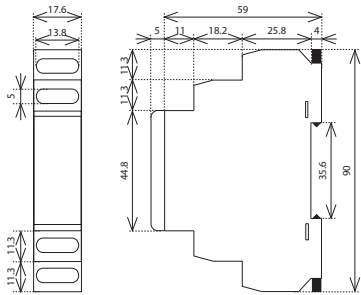



- BPS3-01M
- BPS3-02M
- CU3-07M
- CU3-08M
- CU3-09M/DALI
- CU3-10M
- MI3-02M
- MI3-02M/ETH

3-MODULE


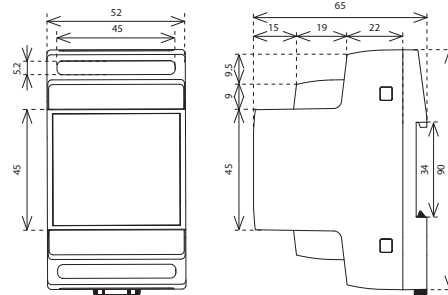


- ADC3-60M
- DA3-22M
- DAC3-04M
- EMDC-64M
- GSM3-01M
- IM3-140M
- LBC3-02M
- PS3-30/iNELS
- SA3-04M
- SA3-06M
- TI3-60M
- DA3-03M/RGBW


6-MODULE




- CU3-01M
- CU3-02M
- CU3-05M
- CU3-06M
- DA3-66M
- EA3-022M
- FA3-612M
- IOU3-108M
- JA3-018M
- PS3-100/iNELS
- SA3-012M
- SA3-022M
- RC3-610M/DALI
- RC3-612M

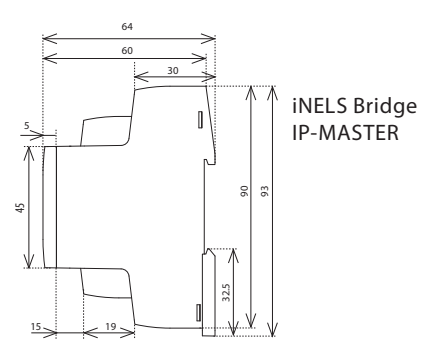


BOX





- IM3-40B
- JA3-02B/DC




- DAC3-04B
- IM3-80B
- TI3-40B



- SA3-01B
- SA3-02B




- EST3-1
- EHT3-1




- WSB3-20
- WSB3-20H
- WSB3-40
- WSB3-40H
- WMR3-21

- IDRT3-1

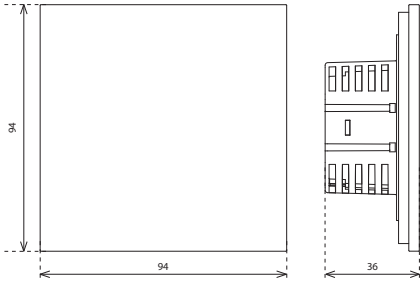

GCR3-11
 GDB3-10
 GMR3-61
 GRT3-50
 GSB3-40



GSB3-60
 GSB3-80
 GSB3-20/S
 GSB3-40/S
 GSB3-60/S

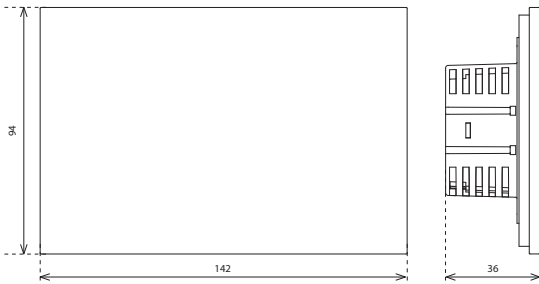


GSP3-100
 GCH3-31



GBP3-60x/2F



IP65



DLS3-1



● Headquarters

ELKO EP Holding SE, Czech

● Branches

ELKO EP Germany, GmbH, Germany

ELKO EP Hungary Kft., Hungary

ELKO EP Poland, sp. z.o.o., Poland

ELKO EP UKRAINE LLC, Ukraine

ELKO EP UK, United Kingdom

ELKO EP Serbia, Serbia

ELKO EP SLOVAKIA, s. r. o., Slovakia

○ Franchises


ELKO EP Bulgaria, Bulgaria

ELKO EP Kuwait, Kuwait

ELKO EP Saudi Arabia, Saudi Arabia

ELKO EP España, S.L., Spain

iNELS BALTIC



ELKO EP, s.r.o. | Palackeho 493 | 769 01 Holesov, Vsetuly | Czech Republic

phone: +420 573 514 221 | fax: +420 573 514 227 | elko@elkoep.com | www.elkoep.com

Published: 09/2022 | Modifications or amendments reserved | © Copyright ELKO EP, s.r.o. | 1st edition